
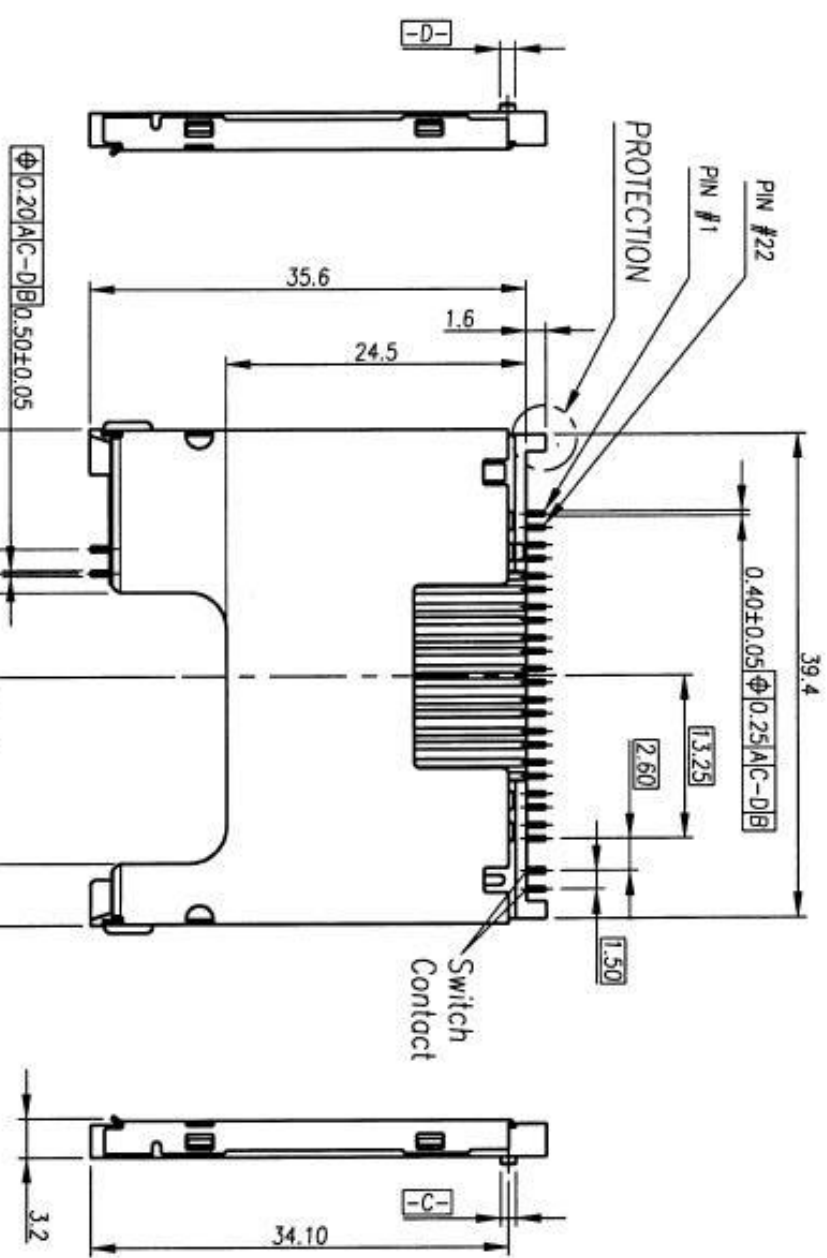


更改 REV	變更內容 MODIFICATION	日期 DATE	修改 DRAW
B	EN-01-04002	04-09-01	EVA

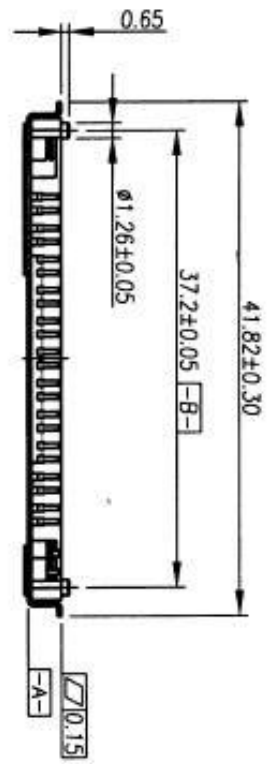

Ordering Information:

SSF M B-0 2215BXXX

Contact Area Plating: 00-WITHOUT Protection
01-WITH Protection
15--15 "uGold Plating

Switch: 0-None
1-Normal Open
2-Normal Close

DIMENSION IN mm (inch)		產品編號 PROD. SPEC.	SP00007
TOLERANCE UNLESS OTHERWISE SPECIFIED		包裝規格 PKG. SPEC.	PPF-SSF-001
.X±0.30	X±	審核 APPROVE	
.XX±0.20	X±	核對 CHECK	
.XXX±0.10	XX±	圖 DRAW	4/2/01
圖紙 SIZE		圖號 FILE NO.	KFP-007
A4		圖號 DWG NO.	SSFMB-02215BXXX
比例 SCALE		圖號 SHEET	1
3:2		圖號 REV	B

更改 REV	變更內容 MODIFICATION	日期 DATE	修改 DRAW
B	EN-01-04002	04-09-01"	EVA

NOTES:

1.Material:

Housing:Thermoplastic UL94V-0

Color:Black

Contact:Phosphor Bronze.

Tin/Lead 100u" at Solder Tail,See "Ordering Information" for Contact Area Plating

Cover:Brass, Nickel plating for all.

2.Specification:

A.Electrical Characteristics:

A-1.Contact Resistance: 40 Milliohms Max.

A-2.Dielectric Withstanding Voltage:

500 VAC Max With 1 Minute

A-3.Insulation Resistance:1000 Megohms Min.

A-4.Current Rating:1 A AC/DC MAX.

Rated Voltage:500 V RMS Min.

B.Mechanical Characteristics:


B-1.Insertion Force:9.80 N Max.

B-2.Separation Force:1.47 N Min.

B-3.Contact Retention Force:0.98 N Min.

Per Contact

B-4.Operating Temperature:-20°C~+60°C

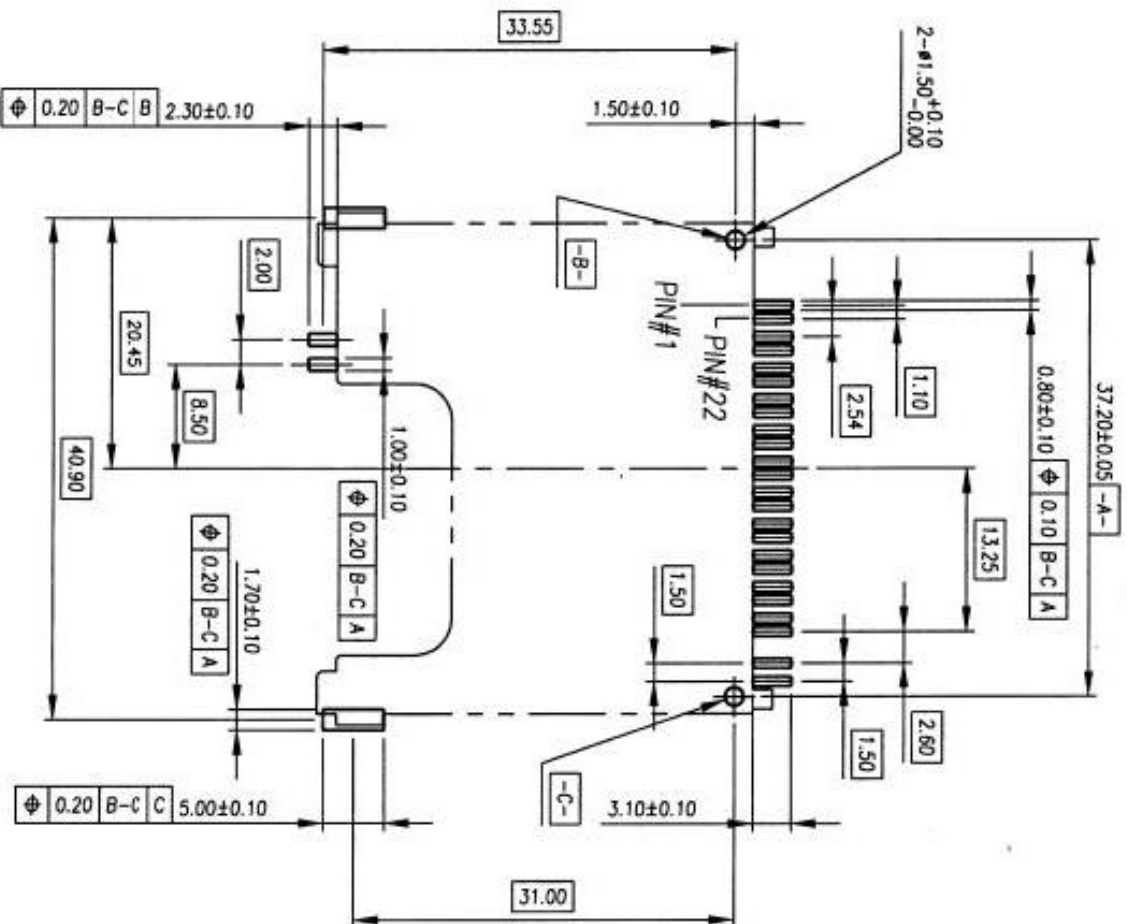

P.C.B Layout

DIMENSION IN mm [inch]	產品編號 PROD. SPEC.	圖樣編號 FIG. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED	PP-SSP-001	PP-SSP-001
X±0.30	X±	審核 APPROVE
XX±0.20	X±	核准 CHECK
XXX±0.10	XX±	製圖 DRAW
圖紙 SIZE	圖號 FILE NO. KFP-007	圖號 DWG NO. SSFMB-02215BXXX
A4	SSFDC CONNECTOR	CUSTOMER DRAWING
比例 SCALE	繪圖 PROJ	圖樣 SHEET
3:2	2	2
REV	B	