


PIN HEADER STRIP DUAL ROW(1.27×2.54mm)

201-1/A Series

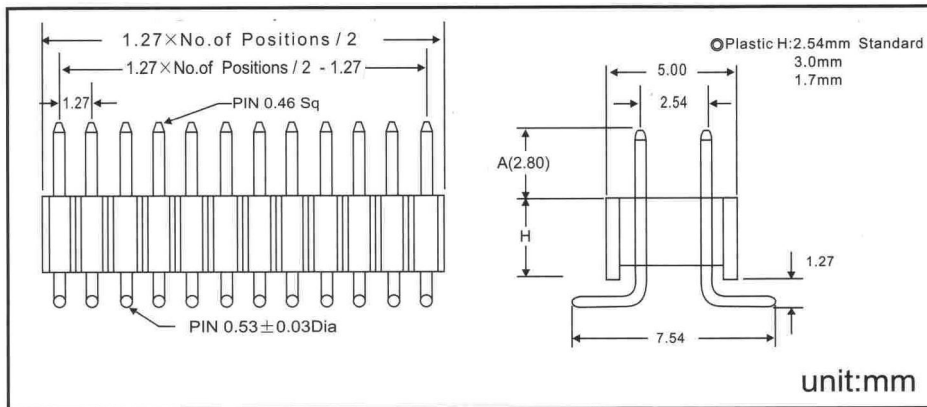


0.05" (1.27mm) Center
SMT Pin Header

Dual Row 06 to 100 Contacts

How to order:

201-1/A-SMT-2X□ P-2.8/2.54/1.27

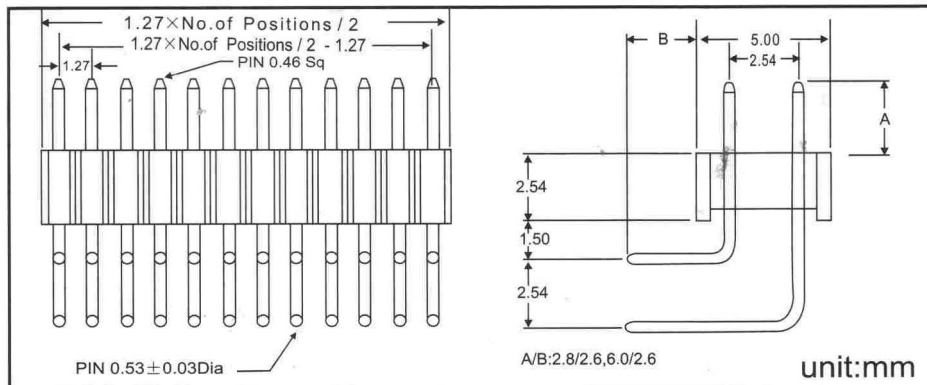


0.05" × 0.1" (1.27 × 2.54
mm) Pin Header

Dual Row 06 to 100 Contacts

How to order:

201-1/A-R-2 × □ P-/6.0/2.6

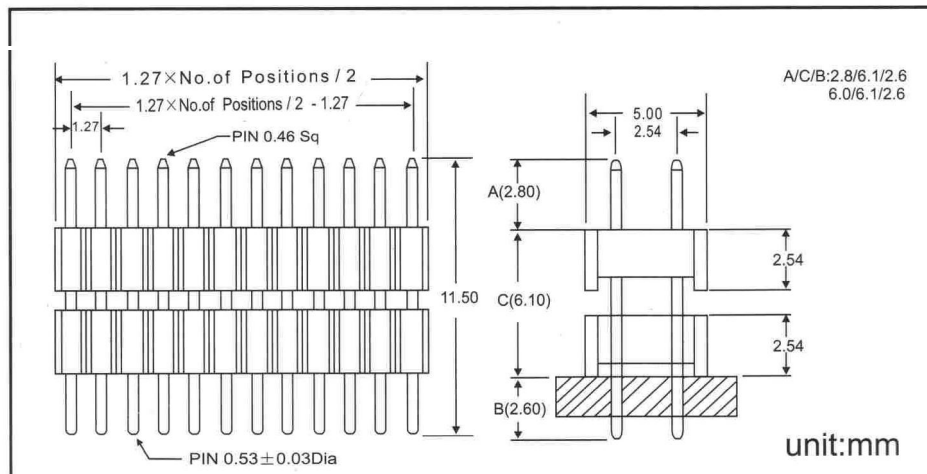


0.05" × 0.1" (1.27 × 2.54mm)
Board Spacer

Dual Row 06 to 100 Contacts

How to order:

201-1DL-S-2x□ P-2.8/6.1/2.6

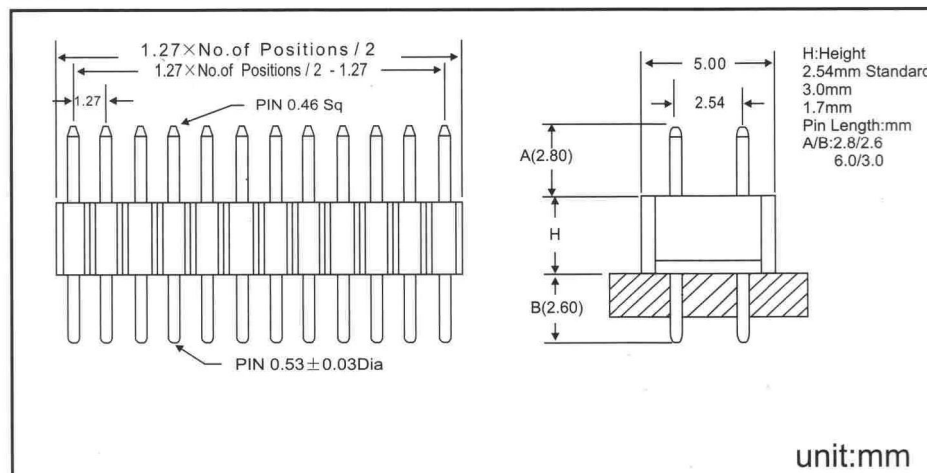

0.05" × 0.1" (1.27 × 2.54
mm) Pin Header

Dual Row 06 to 100 Contacts

How to order:

201-1/A-S-2 × □ P-2.8/2.54/2.6

Pitch:1.27*2.54mm(0.05"*0.1")

Pin Header Dual Row Straight Dip Type

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$









Withstanding Voltage:300V AC/minute

Mechanical:

Operating temperatures: Gold Plated:-55° C to +105° C

Tin plated:-40° C to +105° C

Soldering temperature: +260° C, 10s max.

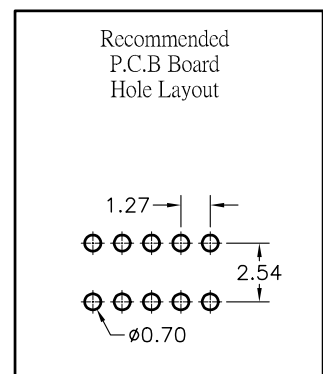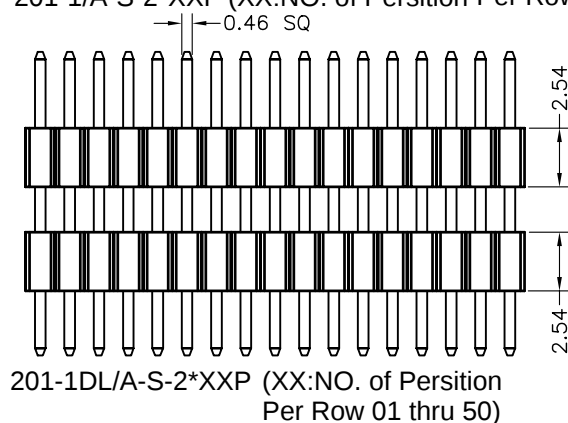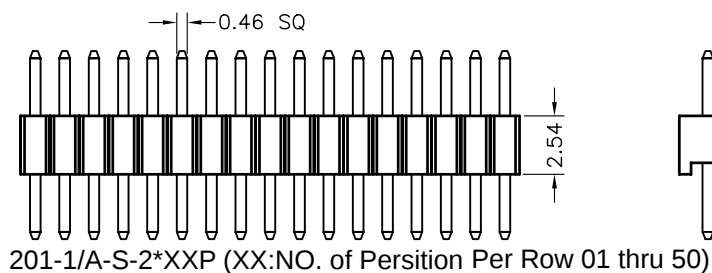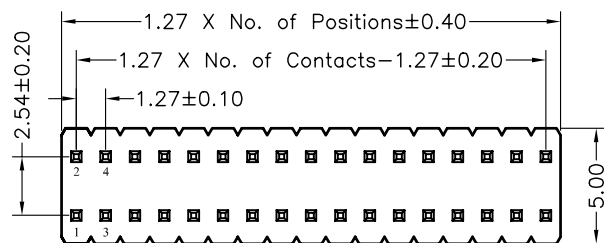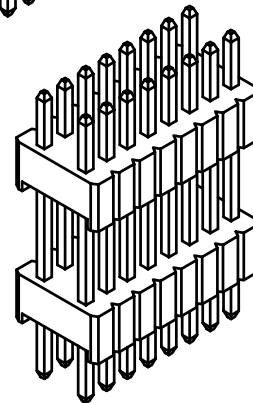

Pitch:1.27*2.54mm(0.05"*0.1")

Pin Header Dual Row Right Angle Dip Type

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$






Withstanding Voltage:300V AC/minute

Mechanical:

Operating temperatures: Gold Plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

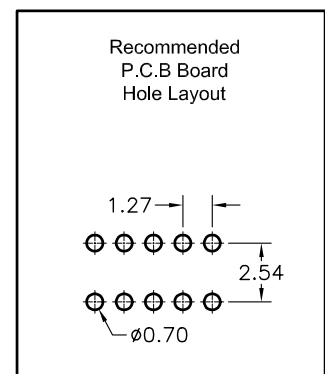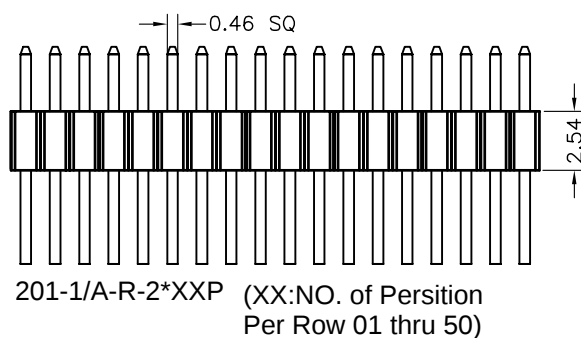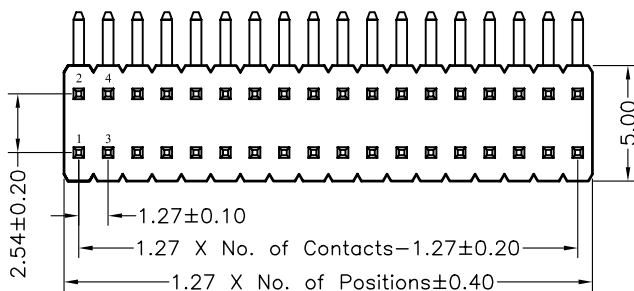

Pitch: 1.27*2.54mm(0.05"*0.1")

Pin Header Dual Row Right Angle Dip Type

Technical Data

Material:

Contact Material: Brass

Insulator Material: Black Polyester UL94V-0

Standard: PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$




Withstanding Voltage: 300V AC/minute

Mechanical:


Operating temperatures: Gold Plated: -55°C to $+105^{\circ}\text{C}$

Tin plated: -40°C to $+105^{\circ}\text{C}$


Soldering temperature: $+260^{\circ}\text{C}$, 10s max.

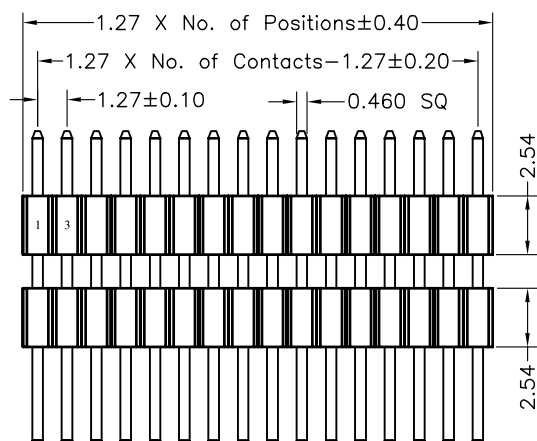


201-1DL/A-R/R1-2*XXP (XX: NO. of Persition Per Row 01 thru 50)

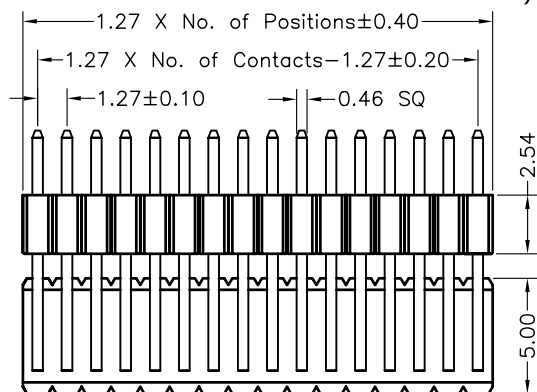

201-1DL/A-R/R2-2*XXP (XX: NO. of Persition Per Row 01 thru 50)

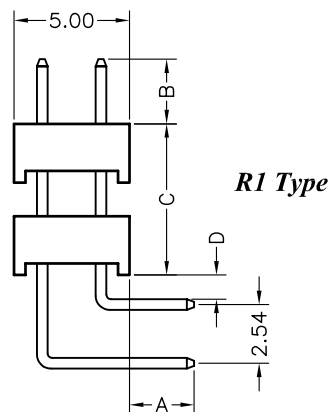


R1 Type

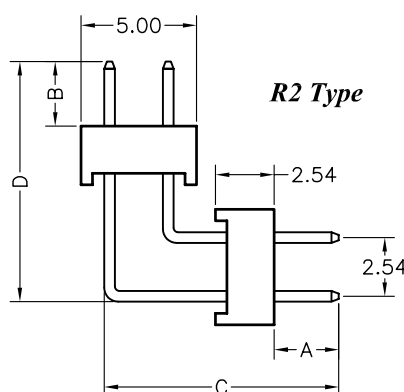

R2 Type

Recommended
P.C.B Board
Hole Layout



Pitch:1.27*2.54mm(0.05"*0.1") Pin Header Dual Row S.M.T Type

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$





Withstanding Voltage:300V AC/minute

Mechanical:


Operaing temperatures: Gold Plsted:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

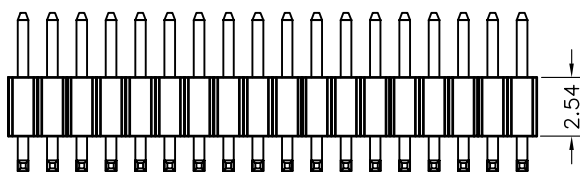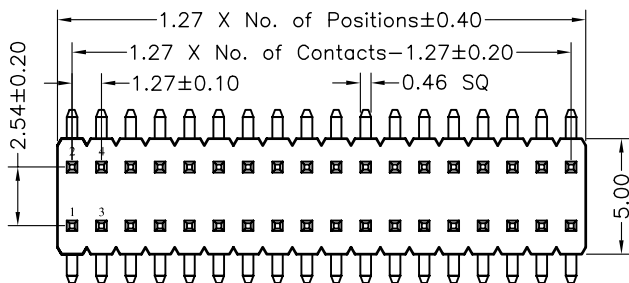

201-1/A-SMT-2*XXP (XX:NO. of Persition
Per Row 01 thru 50)

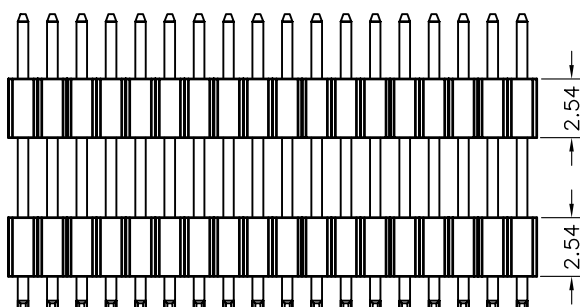

201-1DL/A-SMT-2*XXP (XX:NO. of Persition
Per Row 01 thru 50)

