


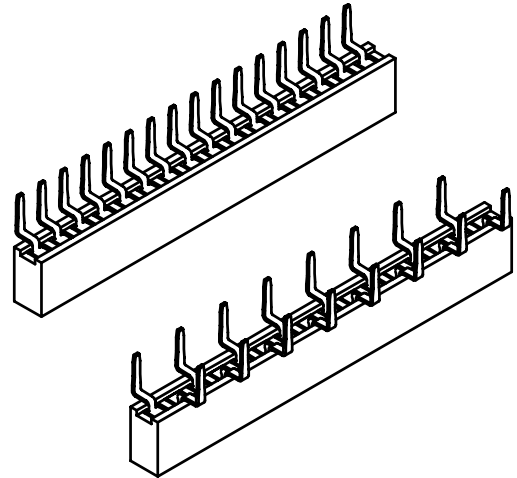

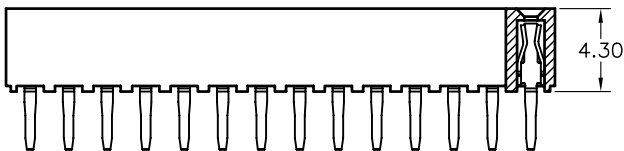


Female Header Single Row Bootom Entry

Soldering temperature: +260° C, 10s max.



205-2S/A-1*XXP (XX:NO. of Persition
Per Row 03 thru 40)

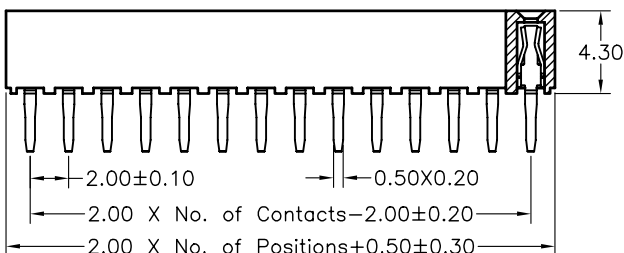

Typical R2 detail

Pitch:2.00mm(0.0787")

Female Header Dual Row Bottom Entry

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PBT+30%G.F

Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$



Withstanding Voltage:450V AC/minute

Mechanical:




Operating temperatures: Gold Plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

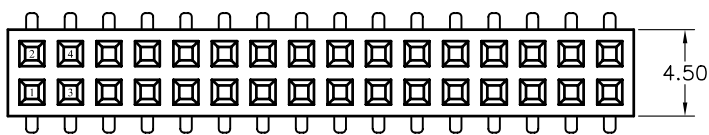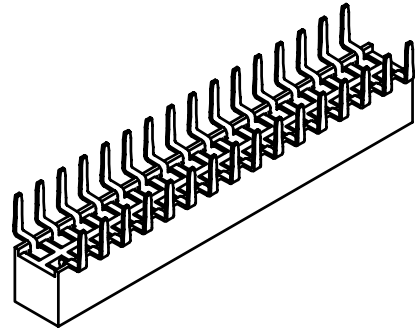

205-2R-2*XXP (XX:NO. of Position
Per Row 03 thru 40)

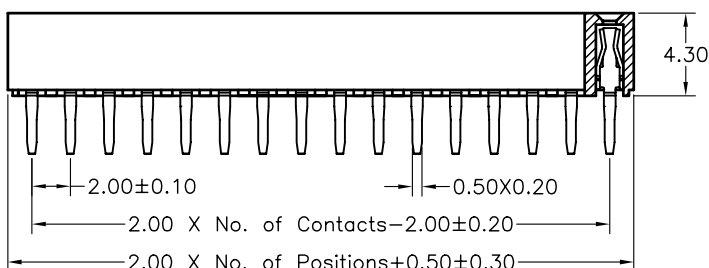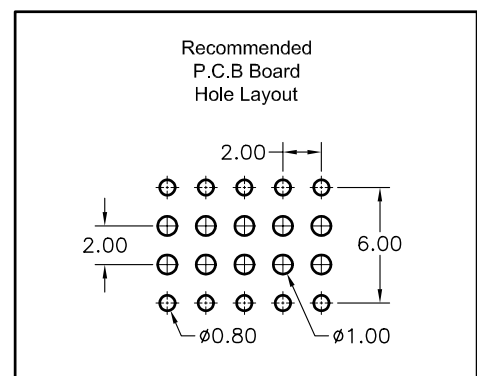

Pitch:2.54mm(0.1")

Female Header Single Row Bottom Entry

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PBT+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$










Withstanding Voltage:550V AC/minute

Mechanical:

Operating temperatures: Gold Plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

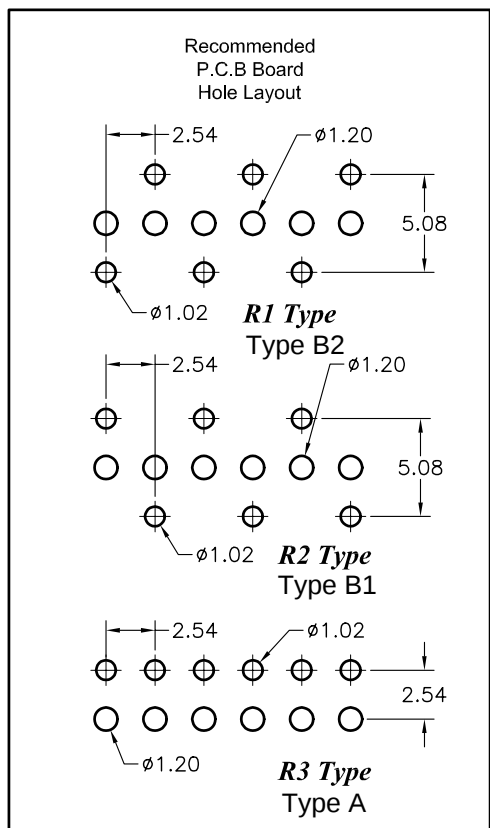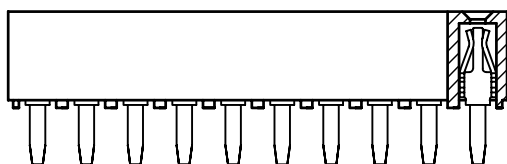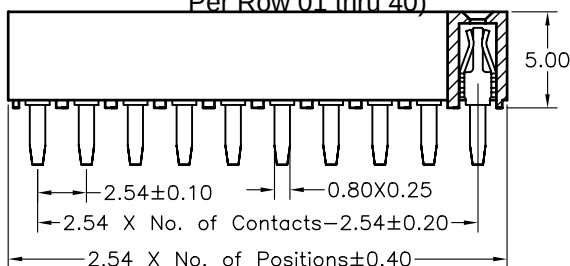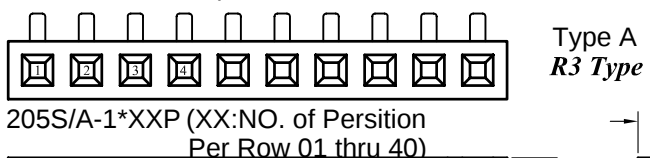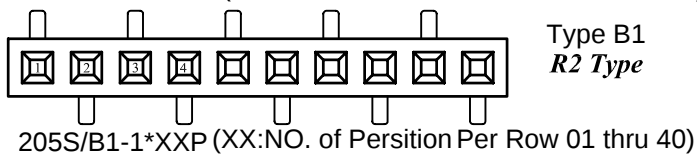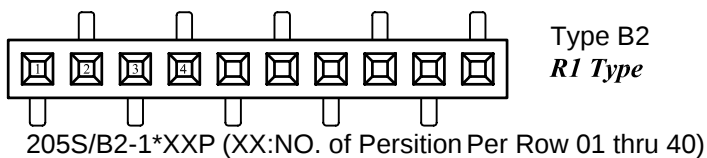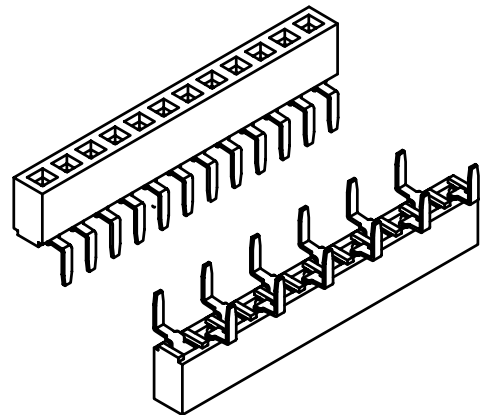

Pitch:2.54mm(0.1")

Female Header Dual Row Bottom Entry

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PBT+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$



Withstanding Voltage:550V AC/minute

Mechanical:




Operating temperatures: Gold Plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

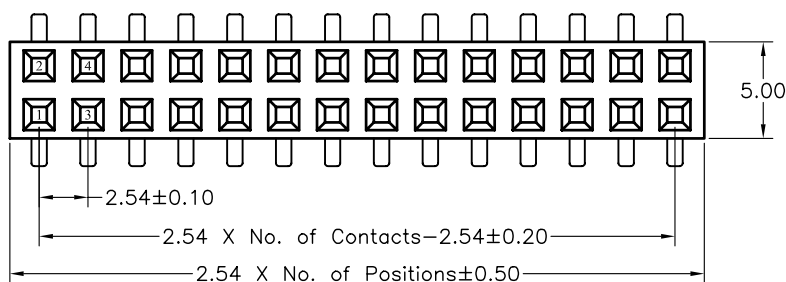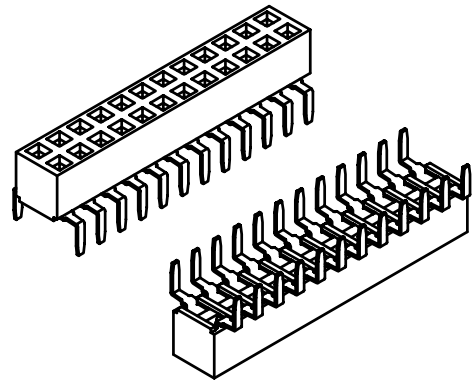

205R-2*XXP (XX:NO. of Persition
Per Row 01 thru 40)

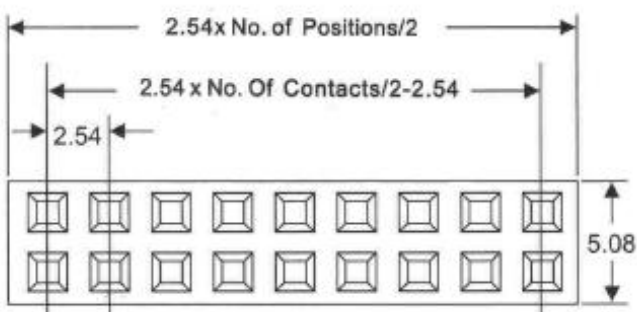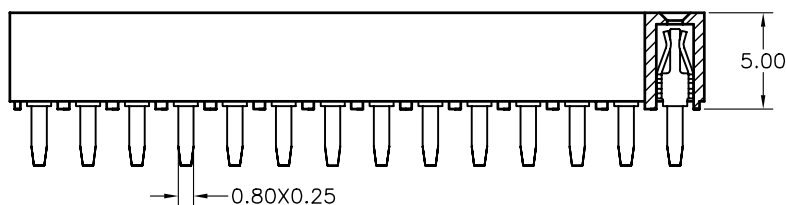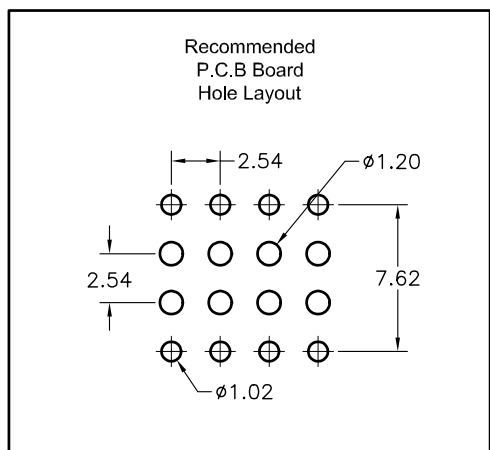

Type 7

