

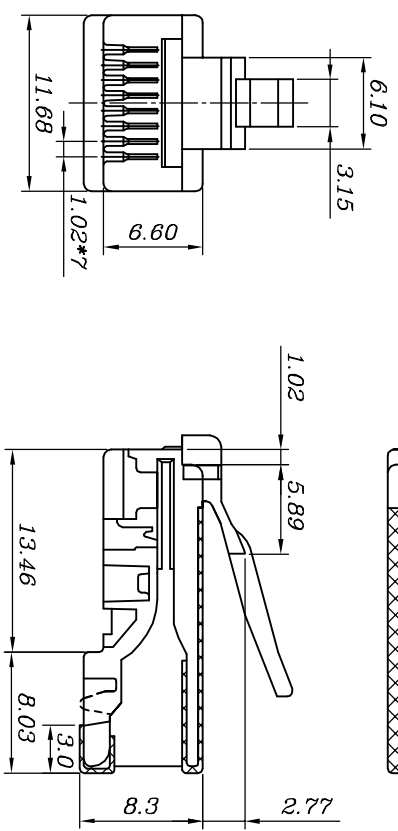


REV	DATE	MODIFICATION	DRAWN
11/05/05			



Round

SPECIFICATIONS

1. ELECTRICAL:
- UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 - INSULATION RESISTANCE: 100 MΩ.
 - TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.
2. MECHANICAL:
- CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
 - DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
- HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 - COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 - CONTACT BLADE: PHOSPHOR BRONZE.
 - CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 - GOLD PLATING: 3u"~50u", ARE AVAILABLE.

规范

1. 电器：

UL应用最大250VOLTS AC.
介质耐电压伏特数:500VOLTS AC.
绝缘阻抗:100百万欧姆.
终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少19.6N/PCS.
耐力测试:至少200次之插拔测试.
3. 材质表面处理
塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.
颜色:透明,或者其他颜色亦可.
金片:磷铜片.
导体:多股线&单股线,24AWG,26AWG.
镀金厚度:3u"~50u",皆可提供.

客户用产品图

BLADE:

Type	E	B	Y	Z
Drawing				
Mark				

DIMENSION IN mm (inch)		材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.
.XX±0.20	.XX°±2°	PC	PLUG-010-EXW
.XX°±5°		名 称	PLUG-8P SHIELDED
.XX±0.10		DESCRIPTION	
审核	核对	制图	比例
APPROVAL	CHECKED	Lucia	2/1
		角法	张数
		PROJ.	更改
		REV	A