

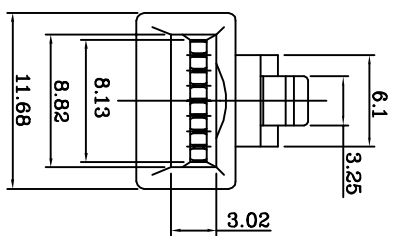
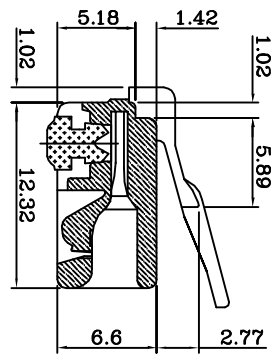



REV	DATE	MODIFICATION	DRAWN
11/05/05			

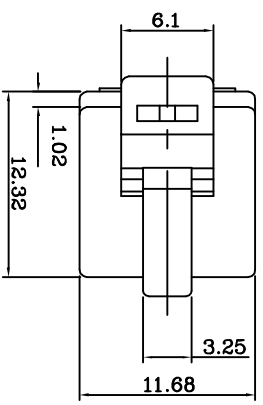

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

BLADE:

客 户 用 产 品 图

DIMENSION IN mm (inch)		材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.
.X $\pm$ 0.20	.X $\pm$ 5 $^{\circ}$	PC	
.XX $\pm$ 0.10	.XX $\pm$ 2 $^{\circ}$	DESCRIPTION	PLUG-8P SHORT BODY
审 核	核 对	制 图	比 例
APPROVAL	CHECKED	Lucia	2/1
		角 法	张 数
		PROJ.	1/1
		REV	A

- SPECIFICATIONS
- 1.ELECTRICAL:
- UL APPLICATIONS:250 VOLTS AC MAX., AT 2 AMPS.
 - DIELECTRIC WITHSTANDING VOLTAGE:500 VOLTS AC.
 - INSULATION RESISTANCE:100 M Ω .
 - TERMINATION: RESISTANCE: 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
- 2.MECHANICAL:
- CABLE-TO-PLUG TENSILE STRENGTH:19.6N/PCS MIN.
 - DURABILITY:200 MATING CYCLES.
- 3.MATERIAL & FINISH:
- HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 - COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 - CONTACT BLADE: PHOSPHOR BRONZE.
 - CONDUCTOR : STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 - GOLD PLATING: 3u"~.50u",ARE AVAILABLE.

规范

1. 电器 :

UL应用最大250V VOLTS AC.

介质耐电压伏特数:500VOLTS AC.

绝缘阻抗:100百万欧姆.

终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少19.6N/PCS.

耐力测试:至少200次之插拔测试.

3. 材质表面处理

塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.

颜色:透明,或者其他颜色亦可.

金片:磷铜片.

导体:多股线&单股线.24AWG,26AWG.

镀金厚度:3u"~.50u",皆可提供.

A- B- C- D-

1 2 3 4 5 6 7

ST-DR-009A