


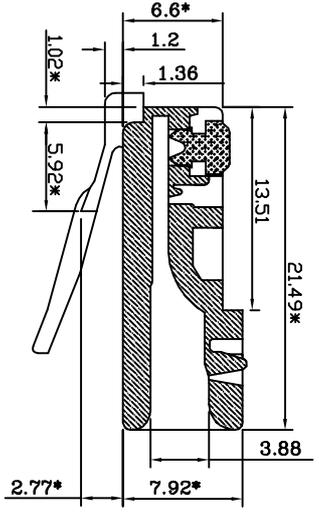



| | | | | | | | |
|-----|----|----------|----|--------------|----|-------|----|
| REV | 更改 | DATE | 日期 | MODIFICATION | 内容 | DRAWN | 修改 |
| | | 11/05/05 | | | | | |

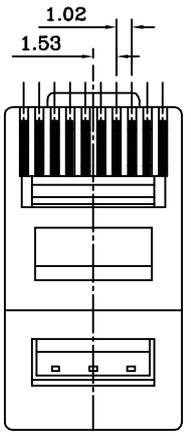

Round



Flat

SPECIFICATIONS

- ELECTRICAL:
 - UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 - INSULATION RESISTANCE: 100 MΩ.
 - TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.
- MECHANICAL:
 - CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
 - DURABILITY: 200 MATING CYCLES.
- MATERIAL & FINISH:
 - HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 - COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 - CONTACT BLADE: PHOSPHOR BRONZE.
 - CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 - GOLD PLATING: 3u"~.50u" ARE AVAILABLE.

规范

- 电器:
 - UL应用最大250V VOLTS AC.
 - 介质耐电压伏特数: 500V VOLTS AC.
 - 绝缘阻抗: 100百万欧姆.
 - 终端阻抗: 在环境测试后最大可承受20微欧姆终端阻抗.
- 机构
 - 拉力测试: 至少19.6N/PCS.
 - 耐力测试: 至少200次之插拔测试.
- 材质表面处理
 - 塑胶壳: 聚碳酸酯, UL-94V-0 or UL94V-2.
 - 颜色: 透明, 或者其他颜色亦可.
 - 金片: 磷铜片.
 - 导体: 多股线 & 单股线, 24AWG, 26AWG.
 - 镀金厚度: 3u"~.50u", 皆可提供.

客户用产品图

BLADE:

| | | | | |
|---------|------|------|------|------|
| Type | E-03 | B-03 | Y-03 | Z-03 |
| Drawing | | | | |
| Mark | | | | |

| | | | |
|--------------------------------------|------------|----------|-------------|
| DIMENSION IN mm (Inch) | | 材 质 | 图 号 |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | MATERIAL | DWG NO. |
| .X±0.20 | .XX±.2° | PC | PLUG-10P10C |
| 审核 APPROVAL | 核对 CHECKED | 制图 DRAWN | 比例 SCALE |
| | | Lucia | 2/1 |
| | | | 张数 SHEETS |
| | | | 1/1 |
| | | | 更改 REV |
| | | | A |