





1262 单双排排母 直脚

间距：2.54mm


胶体高：H=8.50mm

引脚数量：单排 2~40Pin


双排 4~80Pin

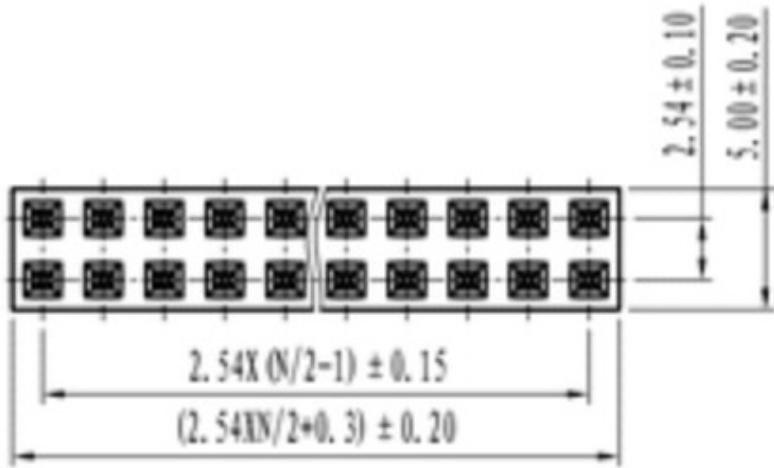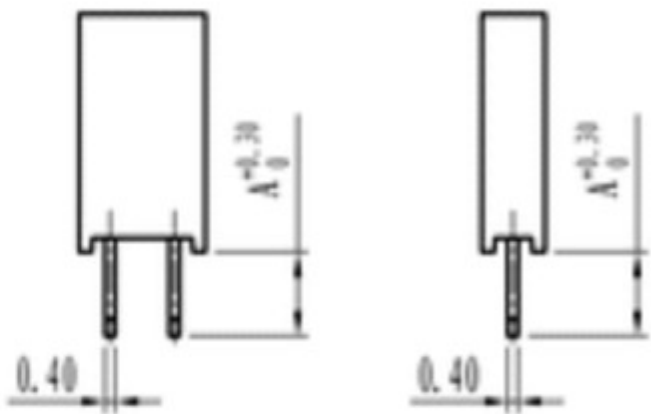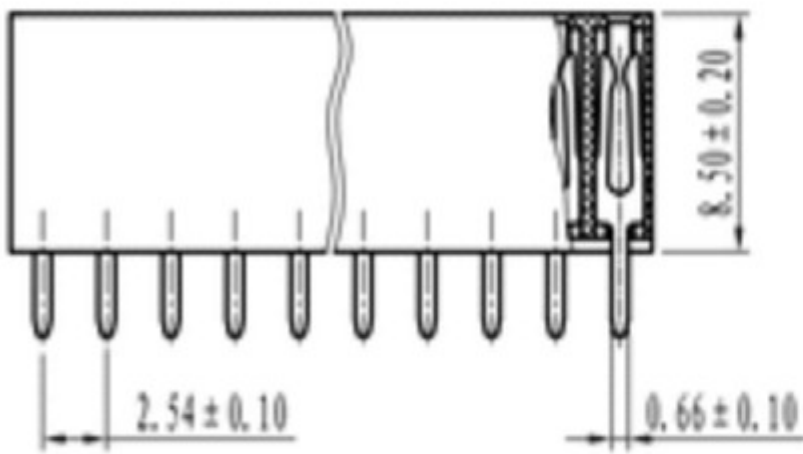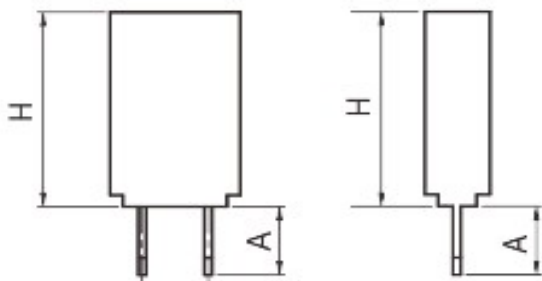


Double row

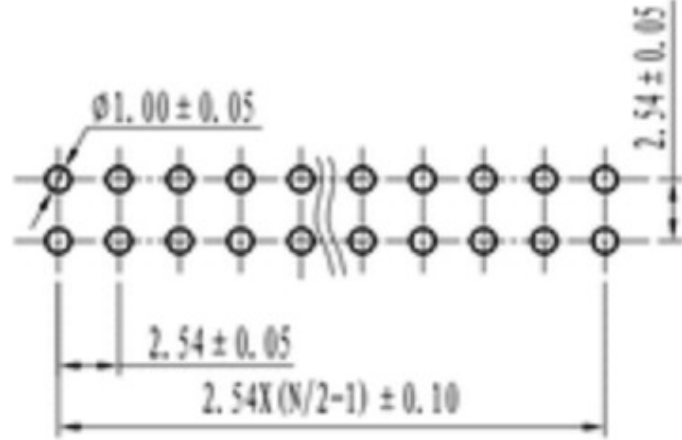

PCB LAYOUT

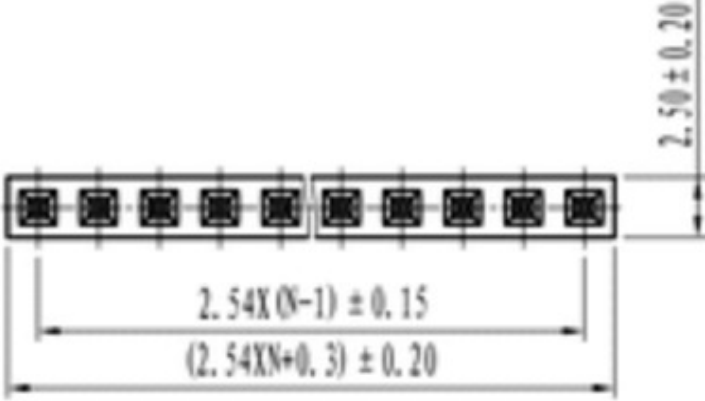

Single row

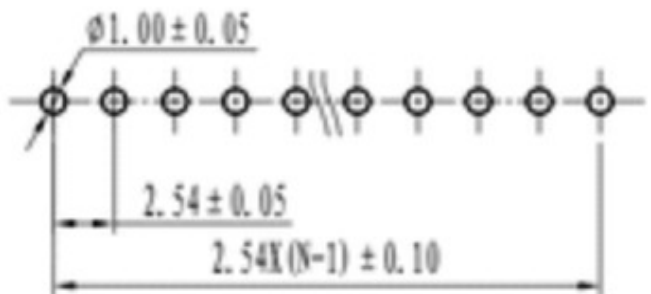

PCB LAYOUT

电气特性：

- 额定电流：3 A
- 接触电阻：≤ 20 mΩ
- 绝缘电阻：≥ 5000 MΩ
- 耐电压：1000 Vr.m.s, 1mA, 60s

机械特性：

- 拔出力：≥ 0.3 N/pin
- 插入力：≤ 1.8 N/pin
- 适用环境：-55 ~ +125