


SMT排针母座(间距2.54mm) 1264系列

SMT Receptacle (Pitch 2.54mm) 1264 Series

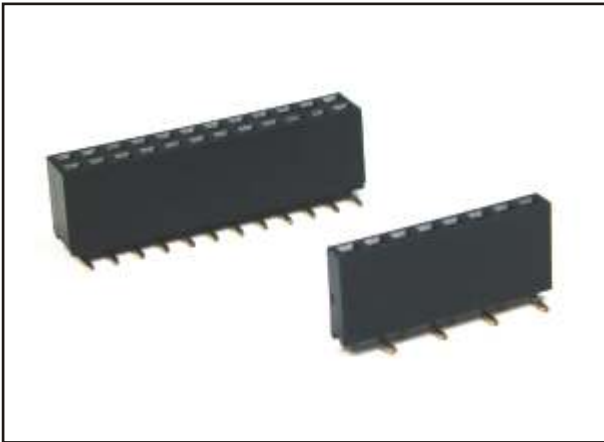

特点

- 引脚数量: 单排: 2~40个, 双排: 4~80个
- 触点数目可以按客户要求而定
- 焊接方式: SMT

电气特性

- 额定电流: 1 A
- 接触电阻: $\leq 20\text{ m}\Omega$
- 绝缘电阻: $\geq 5000\text{ M}\Omega$
- 耐电压: 500 V.r.m.s.

机械特性

- 插入力: 3.0N/Pin(max) (用0.64x0.64的钢针)
- 拔出力: 0.2N/Pin(min) (用0.64x0.64的钢针)
- 适用环境: - 55 ~ + 125

1264-XXX-XX-X

塑胶材料及颜色
(Insulator material and color)
1: 黑色(Black), 热塑性塑料(Thermoplastic), UL94V-0

镀层代码 (Plating code)

代码 (Code)	定义 (Definition)
1	3 μm Sn
2	镀金(Au), CLASS I
3	镀金(Au), CLASS II
4	镀金(Au), CLASS III

排数 (Number of rows)

代码 (Code)	定义 (Definition)
1	单排 (Single row)
2	双排 (Double row)

长度代码 (Length code)

代码 (Code)	定义 (Definition)	"A"
0	单排 (Single row)	A=3.4
	双排 (Double row)	A=6.0

引脚数量 (Pin number)

代码 (Code)	定义 (Definition)
1~40	单排 (Single row)
4~80	双排 (Double row)

1264系列代码 (1264 Series)

Features

- Contacts : 2 to 40 pins(single row),
4 to 80 pins(double row)
- Contacts can be ordered upon customer's request
- Soldering style : SMT

Electrical

- Current rating: 1A
- Contact resistance: $\leq 20\text{ m}\Omega$
- Insulation resistance: $\geq 5000\text{ M}\Omega$
- Withstanding voltage: 500V r.m.s

Mechanical

- Insertion force: 3.0N/Pin(max) (with steel pin 0.64x0.64)
- Extraction force: 0.2N/Pin(min) (with steel pin 0.64x0.64)
- Operating temperature: -55 ~ +125

