


SMT Pin Header (Pitch 2.0mm) 1218 /1228 Series

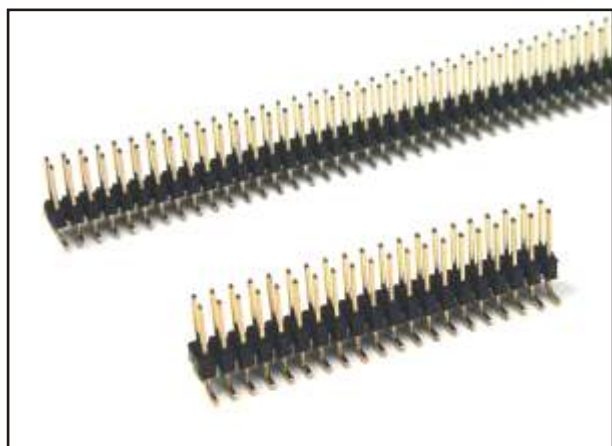

- 引脚间距: 2.0mm
- 引脚数量: 4~80个
- 焊接方式: SMT

- 额定电流: 2 A
- 接触电阻: $\leq 20 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 耐电压: 1000 V r.m.s

● 适用环境: - 55℃~+ 125℃

12XX - XXX - XX - X

1	3 μ m Sn
2	镀金(Au), CLASS I
3	镀金(Au), CLASS II
4	镀金(Au), CLASS III

代 码 (Code)	定 义 (Definition)		
	A	B	C
1	9.8	7.0	6.0

代码 (Code)	定义 (Definition)
1	2.0 mm

代码 (Code)	定义 (Definition)
4~80	双排 (Double row)

代码 (Code)	定义 (Definition)
1218	双排SMT排针/绝缘体高2.0mm (SMT dual row pin header, Body 2.0mm)
1228	双排SMT排针/绝缘体高1.5mm (SMT dual row pin header, Body 1.5mm)

- Pitch: standard 2.0mm
- Contacts : 4 to 80 pins
- Soldering style: SMT

- Current rating: 2A
- Contact resistance: $\leq 20\text{m}\Omega$
- Insulation resistance: $\geq 5000\text{ M}\Omega$
- Withstanding voltage: 1000V r.m.s

- Operating temperature: -55°C~+125°C

