


弯脚排针(间距2.0mm) 1213 /1214 /1223 /1224系列

Right Angle Pin Header (Pitch 2.0mm) 1213 /1214 /1223 /1224 Series

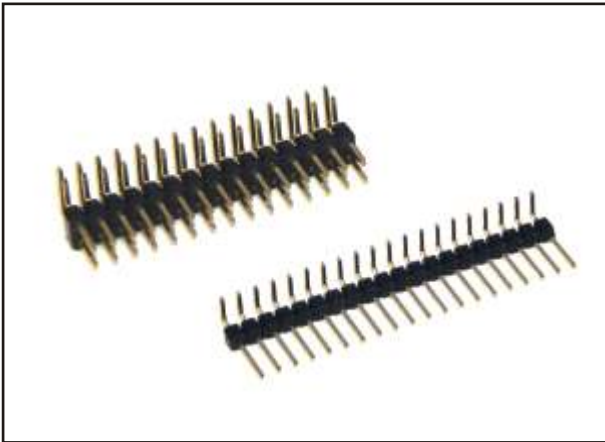

特点

- 引脚间距: 2.0mm
- 引脚数量: 单排: 1~40个, 双排: 4~80个
- 可以按照客户要求裁成任意脚数.

电气特性

- 额定电流: 2 A
- 接触电阻: $\leq 20 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 耐电压: 1000 V r.m.s

机械特性

- 适用环境: - 55 ~ + 125

12XX - XXX - XX - X

塑胶材料及颜色
(Insulator material and color)
1: 黑色(Black),PBT+30%GF,UL94V-0

镀层代码 (Plating code)

代码 (Code)	定义 (Definition)
1	3 μm Sn
2	镀金(Au), CLASS I
3	镀金(Au), CLASS II
4	镀金(Au), CLASS III

长度代码 (Length code)

代码 (Code)	定义 (Definition)	
	B	C
1	3.0	7.5

引脚间距 (Pin pitch)

代码 (Code)	定义 (Definition)
1	2.0 mm

引脚数量 (Pin number)

代码 (Code)	定义 (Definition)
1~40	单排 (Single row)
4~80	双排 (Double row)

12XX系列代码 (12XX Series)

代码 (Code)	定义 (Definition)
1213	单排弯脚/绝缘体高2.0mm (Single row-Angle,Body 2.0mm)
1214	双排弯脚/绝缘体高2.0mm (Double row-Angle,Body 2.0mm)
1223	单排弯脚/绝缘体高1.5mm (Single row-Angle,Body 1.5mm)
1224	双排弯脚/绝缘体高1.5mm (Double row-Angle,Body 1.5mm)

Features

- Pitch: standard 2.0mm
- Contacts :Single row: 1 to 40 pins,
Double row: 4 to 80 pins
- Contacts can be ordered upon customer's request.

Electrical

- Current rating: 2A
- Contact resistance: $\leq 20 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Withstanding voltage: 1000V r.m.s

Mechanical

- Operating temperature: -55 ~ +125

