


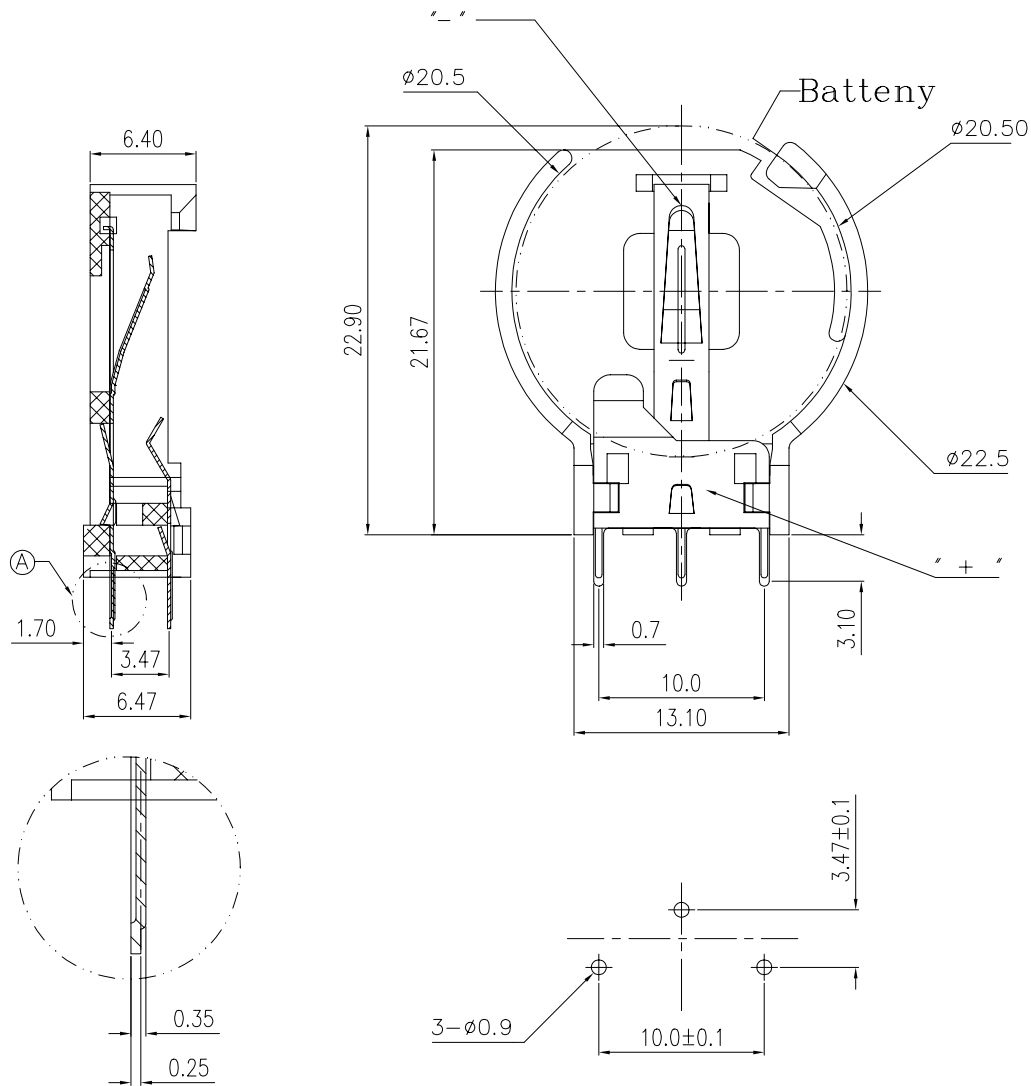

NOTES:

* Material

Body: Nylon 66+30% G.F.
Flammability UL 94V-0 Rated.
Color: Black.
Contact: Phosphor Bronze.
Contact: Tin Plating Over Nickel or Copper.

* Specification

Application For 3V Lithium Battery.
Dielectric Withstanding Voltage: 500 VDC
Operation Temperature: -55°C To +105°C
Durability: 50 Cycles Min.
Contact Resistance: 30 Milliohms.

* How to order:

WBA-3 B 2 U
U: Lead Free
Blank: Sn Pn
Blank: Black
2: Brown
3: White
2: Non-Post
B: Straight
NO. Of Contacts
Series NO.

VIEW A
9:1

P.C. BOARD LAYOUT

REV				Drawing By		Data							
Units	mm	Scale	2:1	Reviewed By		Data		Date		Title	Straight Battery (Housing No Post)		
Tolerance Unless Otherwise Specified						Sheet	1 of 1						
.X ~ ±0.38				Approval By		Data		Third Angle Projection					
.XX ~ ±0.25										Drawing No.		REV	
.XXX ~ ±0.20													
Angle ~ ± 3°													