
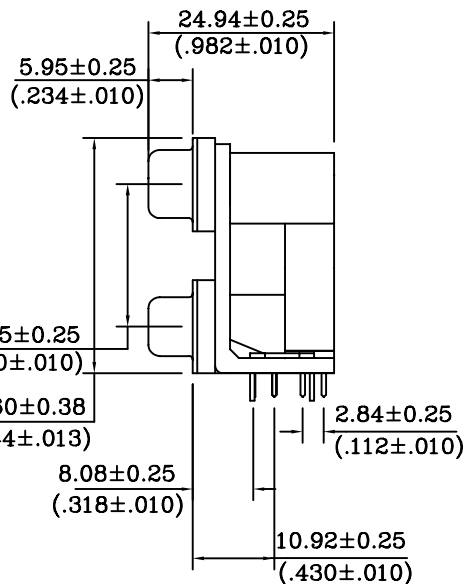



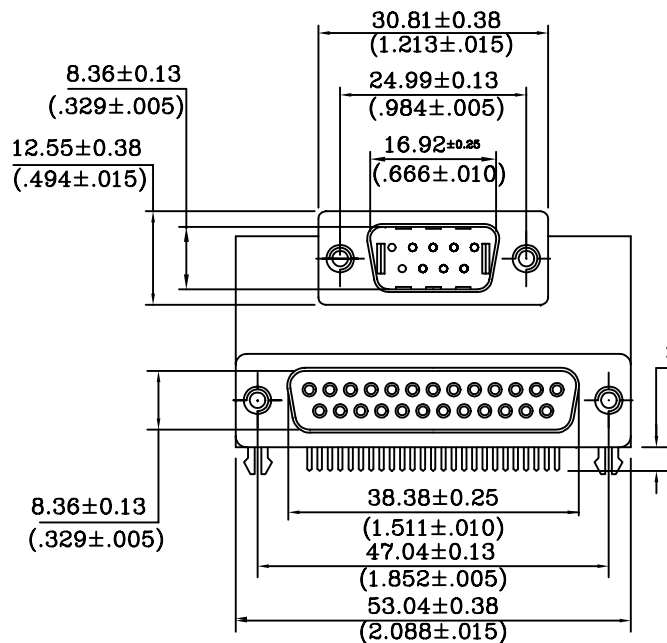


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SELECTIVE GOLD FINISHED
 GROUNDING BRACKET : ZINC ALLOY , ZINC PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

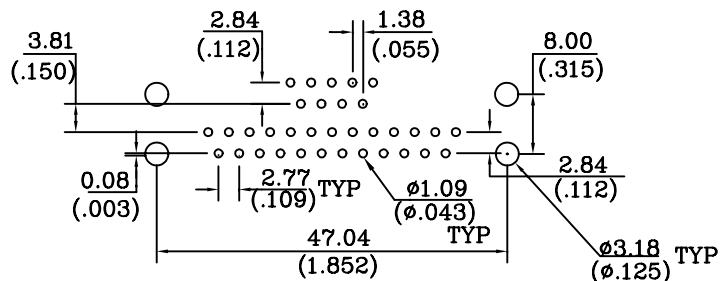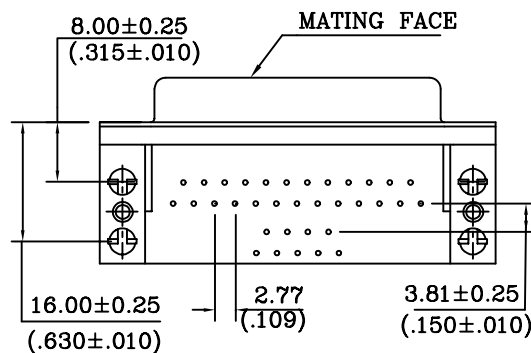

P.C.B LAYOUT

Series No.

No of Contacts

24: 9/15 Pins

34: 9/25 Pins

40: 15/25 Pins

Contact Type

0: Female/Female

1: Male/Male

2: Female/Male

3: Male/Female

Contact Plating

01: Selective Gold Flash

15: Selective 15u" Gold

30: Selective 30u" Gold

1203-134-301-200

Mounting Options

0: 2-prong Board Locks

Mating Options

0: 4-40 Threaded Riveted

1: 4-40 Threaded Riveted

& Jack screws assembled

2: 4-40 Threaded Riveted

& Jack screws in bulk

Connectors Spacing

1: 0.625" Spacing Balck Color

2: 0.750" Spacing Black Color

3: 0.900" Spacing Black Color

5: 0.625" Spacing Pc99 Color

6: 0.750" Spacing Pc99 Color

7: 0.900" Spacing Pc99 Color

				Drawn by	Zhenxing Fu	2004.06.24
				Designed by	Zhenxing Fu	2004.06.24
				Approved by	Wangjun	2004.06.24
					TORERANCE	Code:000
A0	Drawing	Zhenxing FU	2004.06.24	Units:mm(inches)	.XX ±0.13	Scale 1:1
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+\'-2°

D-sub Right Angle 0.318"
 Footprint, Male

Ver A0 Part No. 1203-134-301-200