
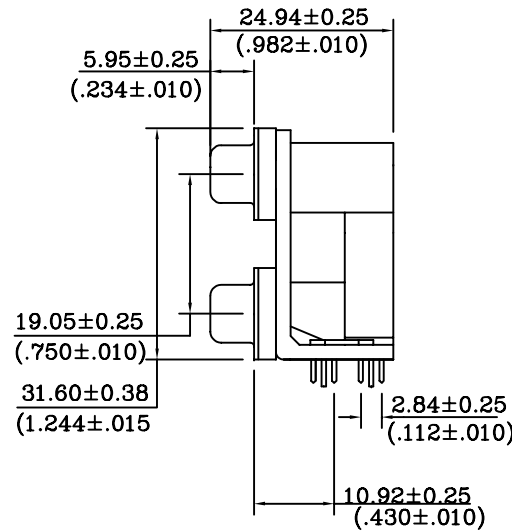



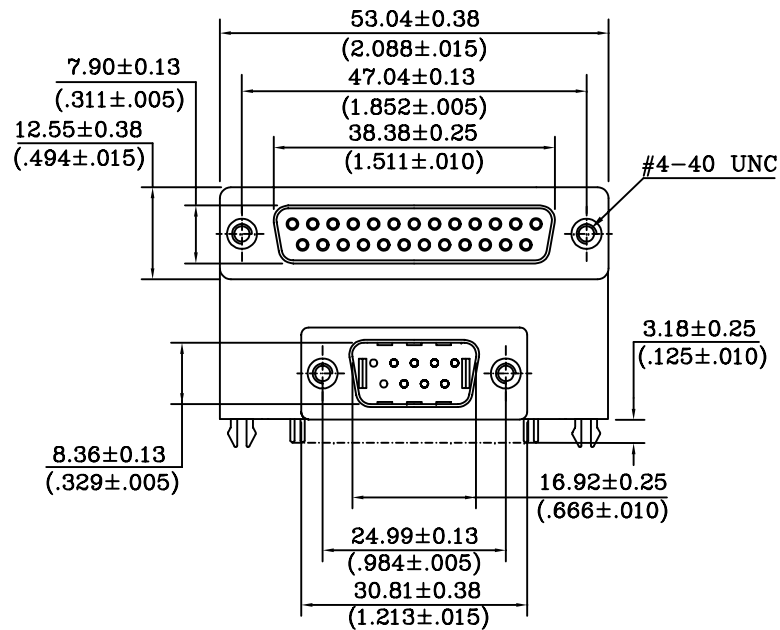


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : SOCKET, PHOSPHOR BRONZE
 PLUG, BRASS
 CONTACT FINISH : SELECTIVE GOLD FINISHED
 GROUNDING BRACKET : ZINC ALLOY, ZINC PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

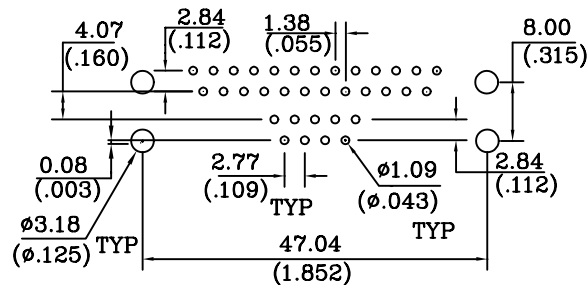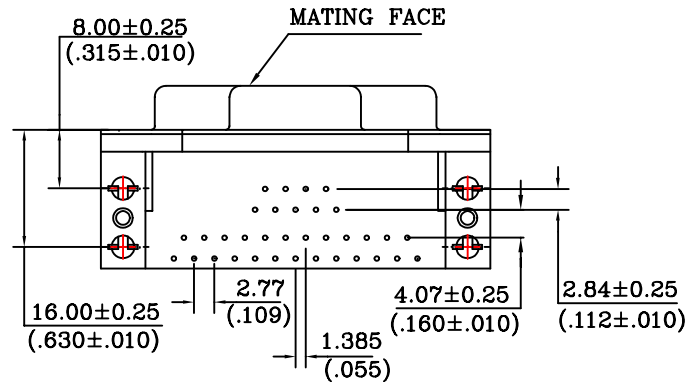

P.C.B LAYOUT

Series No.:

No. of Contacts:
 34: 34 Pins(25/9)

Contact Type:
 0: Female/Female
 2: Female/Male

Contact Plating:
 01: Selective Gold Flash
 15: Selective 15u" Gold
 30: Selective 30u" Gold

1206-134-201-200

Mounting Options:
 0: With Four 2-Prong
 Board Locks
 1: With Two 2-Prong
 Board Locks

Mating Options:
 0: 4-40 Threaded Riveted
 1: 4-40 Threaded Riveted
 & Jack Screws Assembled
 2: 4-40 Threaded Riveted
 & Jack Screws in Bulk

Connectors Spacing:
 1: 0.625" Spacing, Black
 2: 0.750" Spacing, Black
 3: 0.900" Spacing, Black

				Drawn by	ZhaoAn Zeng	2005-3-21	D-sub Stack Connector, Regular 25 / Regular 9	
				Designed by	ZhaoAn Zeng	2005-3-21		
				Approved by	ZhiFu Lin	2005-3-21		
					TORERANCE	Code:000		
A0	Drawing	ZhiFu Lin	2005.03.21	Units:mm(inches)	X ±0.3 XX ±0.25 XXX ±0.100	Scale 1:1		
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+\'-1°	Ver A0	Part No. 1206-134-201-200