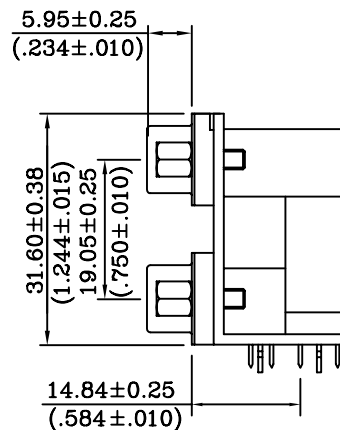


The diagram illustrates the configuration options for the 1230-024-201-210 series. It shows how different options are grouped under specific series numbers. The options are categorized into six main groups: Series No., No. of Contacts, Contact Type, Contact Plating, Mounting Options, Mating Options, and Connectors Spacing. The diagram uses lines to connect these options to their respective series numbers, indicating which options are available for each series.

Series No.: 1230-024-201-210

No. of Contacts: 24: 24 Pins (H.D.15/9), 40: 40 Pins (H.D.15/25)

Contact Type: 0: Female/Female, 1: Male/Male, 2: Female/Male, 3: Male/Female

Contact Plating: 01: Selective Gold Flash, 15: Selective 15u" Gold, 30: Selective 30u" Gold

Mounting Options: 0: With Four 2-Prong Board Locks, 1: With Two 2-Prong Board Locks

Mating Options: 0: 4-40 Threaded Riveted, 1: 4-40 Threaded Riveted & Jack Screws Assembled, 2: 4-40 Threaded Riveted & Jack Screws in Bulk

Connectors Spacing: 1: 0.625" Spacing, Black, 2: 0.750" Spacing, Black, 3: 0.900" Spacing, Black, 5: 0.625" Spacing, PC99 Color, 6: 0.750" Spacing, PC99 Color, 7: 0.900" Spacing, PC99 Color

				Drawn by	ZhaoAn Zeng	2005-3-21	D-sub Stack Connector H.D./Regular	
				Designed by	ZhaoAn Zeng	2005-3-21		
				Approved by	ZhiFu Lin	2005-3-21		
					TORERANCE	Code:000		
A0	Drawing	ZhiFu Lin	2005.03.21	Units:mm(inches)	.X ±0.3 .XX ±0.25 .XXX ±0.100	Scale 1:1		
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+/-1°	Ver A0	Part No. 1230-024-201-210