
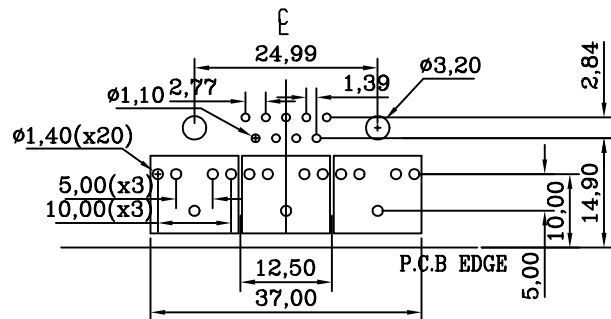
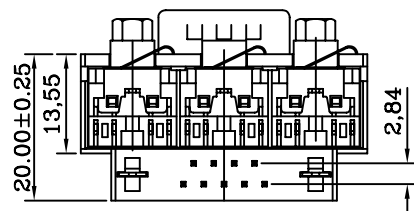
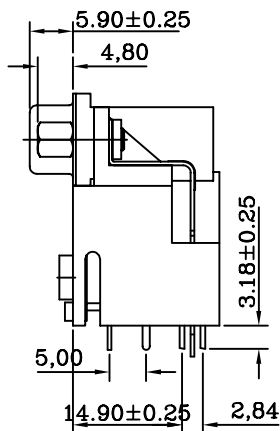


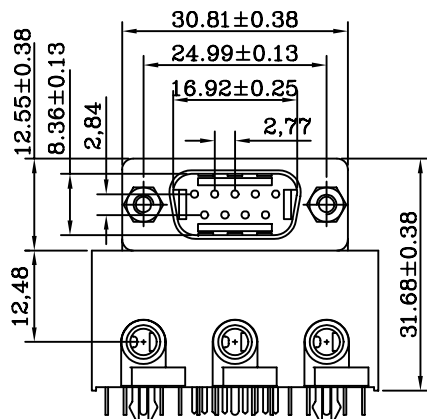

RECOMMENDED P.C.B LAYOUT

MATERIALS & FINISHES:
 Shell: Cold Roller Steel. Nickel Plated.
 Insulator: PBT UL 94V-0 Rated. PC99 COLOR
 Contacts: Materials Bass.
 Contact Finish: Gold Flash.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: 5000 Megohms Minimum
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:

D-SUB:
 Mating Force: 5.10Kg. Maximum
 Unmating Force: 0.32Kg. Maximum
 AUDIO JACK
 Mating Force: 2.5Kg. Maximum
 Unmating Force: 0.30Kg. Maximum

Series No.:

No. of Contacts:
 024: 24 Pins

Contact Type:
 1: Plug, Brass

Contact Plating:
 01: Selective Gold Flash
 15: Selective 15u" Gold
 30: Selective 30u" Gold

1264-024-101-910

Mounting Options:
 0: 2-Prong Board Locks.

Mating Options:
 0: 4-40 Threaded Riveted
 1: 4-40 Threaded Riveted
 & Jack Screws Assembled
 2: 4-40 Threaded Riveted
 & Jack Screws in Bulk

Insulator:
 0: Black (PBT)
 9: PC99 Color

				Drawn by	ZhaoAn Zeng	2005-3-21	D-Sub, Stack, 9Male/3 Phone Jacks	
				Designed by	ZhaoAn Zeng	2005-3-21		
				Approved by	ZhiFu Lin	2005-3-21		
					TOLERANCE	Code:000		
A0	Drawing	ZhiFu Lin	2005.03.21	Units:mm(inches)	.X ±0.3 .XX ±0.25 .XXX ±0.100	Scale 1:1		
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1	Angles+/-1°		Ver A0	Part No. 1264-024-101-910