
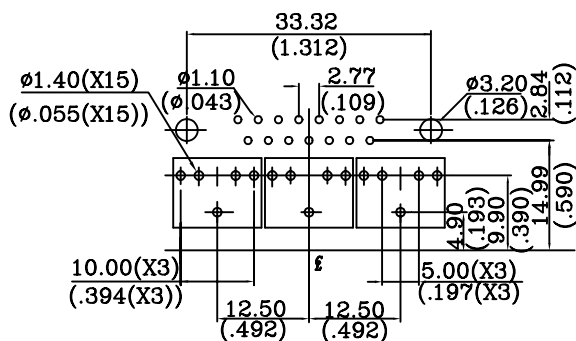
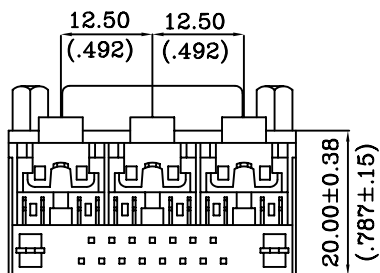
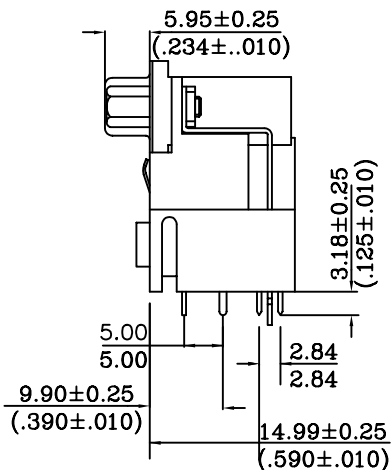


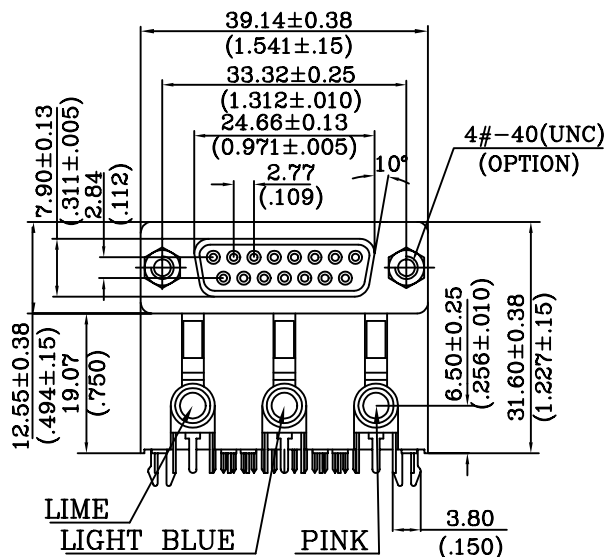

P.C.B LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, 131C COLOR
 CONTACT MATERIAL: BRASS
 CONTACT FINISH : SELECTIVE GOLD FLASH
 GROUNDING BRACKET : BRASS MATERIAL, TIN FINISHED
 RIVETED INSERT : BRASS MATERIAL , NICKEL FINISHED
 JACK SCREWS : BRASS MATERIAL , NICKEL FINISHED
 WITH #4-40 THREADED ASSEMBLED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 3.0 AMPS
 CONTACT RESISTANCE : 25 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

Series No.: 1625-030-201-910
 No. of Contacts: 030: 30 Pins
 Contact Type: 2: Socket, Brass
 Contact Plating: 01: Selective Gold Flash
 15: Selective 15u" Gold
 30: Selective 30u" Gold
 Mounting Options: 0: 2-Prong Board Locks.
 Mating Options: 0: 4-40 Threaded Riveted
 1: 4-40 Threaded Riveted & Jack Screws Assembled
 2: 4-40 Threaded Riveted & Jack Screws in Bulk
 Insulator: 0: Black (PBT)
 9: PC99 Color

				Drawn by	ZhaoAn Zeng	2005-3-21	D-sub, Stack, 15 Female/3 Phone Jacks, PC99 Color	
				Designed by	ZhaoAn Zeng	2005-3-21		
				Approved by	ZhiFu Lin	2005-3-21		
					TORERANCE	Code:000		
A0	Drawing	ZhiFu Lin	2005.03.21	Units:mm(inches)	X ±0.3 .XX ±0.25 .XXX ±0.100	Scale 1:1		
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+/-1°	Ver A0	Part No. 1265-030-201-910