

REV	MODIFICATION	DATE	DRAW	APPROVE
A	EN0704015	16-APR-07	YUKI	KEVIN

NOTES
MARK⊗IS MAJOR TEST DIMENSION

1:MATERIAL:

HOUSING: PBT+30%G.F, BLACK, UL94V-0

CONTACT: BRASS/PHOSPHOR BRONZE

2:FINISH:

CONTACT PLATING: TIN PLATED 80u"~120u"

3:SPECIFICATION:

CURRENT RATING: 1mA

WITHSTANDING VOLTAGE: AC 1000V 5s

INSULATION RESISTANCE: 1000M Ω 500V DC

OPERATING TEMPERATURE: -55°C~105°C

4:P/N:

10 3-XXX Z A T P K XX

01: 窄体无杠DIM C=3.2

02: 窄体无杠DIM C=2.8

03: 窄体有一杠DIM C=3.2

04: 窄体有一杠DIM C=2.8

05: 窄体有二杠DIM C=3.2

06: 窄体有二杠DIM C=2.8

07: 宽体无杠DIM C=3.2

08: 宽体无杠DIM C=2.8

09: 宽体有一杠DIM C=3.2

10: 宽体有一杠DIM C=2.8

11: 宽体有二杠DIM C=3.2

12: 宽体有二杠DIM C=2.8

XXX: PIN NO.

eg.: 32PIN=032

36PIN=036

Z: 无公母之分

A: PH1.778


7: PH2.54

T: CONTACT PLATING TIN

K: PLASTIC COLOUR BLACK

P: 冲制端子

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差參考表



TITLE:
產品名稱 : ICI.778 W/ TWO STICK

X.X ±0.25

X.X° ±3°

APPD: KEVIN
核准:

PRODUCT NO:
產品編號: 103-064ZATPKXX

X.XX ±0.15

X.XX° ±1°

CHECK: TENA
校對:



DATE SCALE UNIT TYPE PAGE

X.XXX ±0.05

X.XXX° ±0.5°

DRAW: YUKI
繪圖:

2007.04.16 FREE MM H I/I

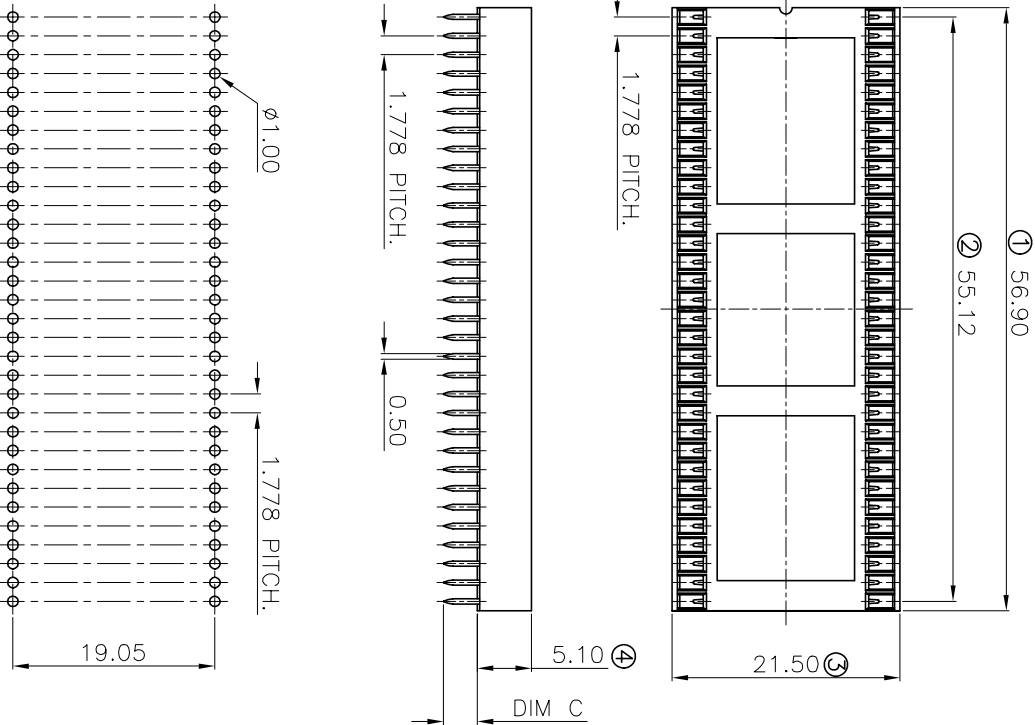

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.08

