


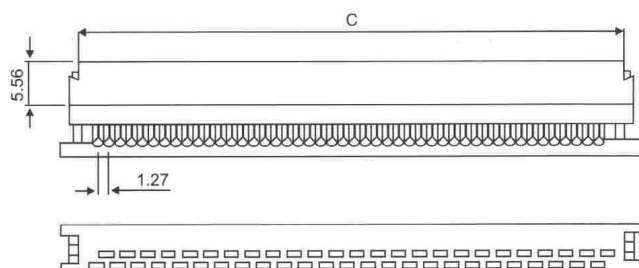
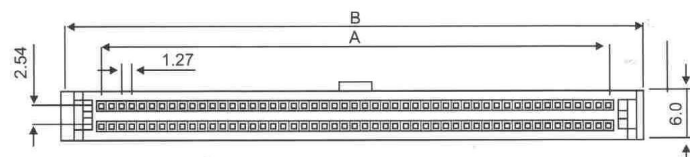


SCSI II IDC SOCKET(1.27mm)

101-1 Series

P.C.B LAYOUT PATTEN

POSITION	A	B	C
20P	11.43	18.55	16.35
26P	15.24	22.36	20.16
32P	19.05	26.17	23.97
34P	20.32	27.44	25.24
40P	24.13	31.25	29.05
50P	30.48	37.60	35.40
52P	31.75	38.87	36.67
60P	36.83	43.95	41.75
68P	41.91	49.03	46.83
80P	49.53	56.65	54.45
100P	62.23	69.35	67.15

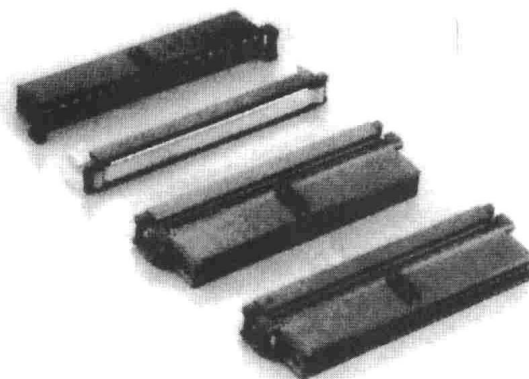

unit:mm

Order Information

101-1	020	P	G	3
1	2	3	4	5

1.SERIES NO .

101-1-1.27
101-1-0.635

2.CONTACT NUMBER

020 026 032 034 040 050
052 060 068 080 100

3.CONTACT TYPE.

P=NON DISTRIBUTION

4.CONTACT PLATING

S=SELECTIVE GOLD
G=GOLD FLASH
C=15 μ " GOLG
D=30 μ " GOLG

5.INSULATOR COLOR

3=BLACK

SCSI II IDC SOCKET(0.635mm)

101-1 Series

Material

Insulator : P.B.T.+30% Glass Fiber (UL94V-0)

Contact : Phosphor Bronze or Brass

Contact Plated : Gold over Nickel or Tin

Specification

Current Rating : 1A

Insulation Resistance : 1000M Ω Min. at 500V DC

Dielectric Withstanding Voltage : 500V AC for 1 Minute

Operation Temperature : -55°C ~ +105°C

Contact Resistance : 15m Ω Max

Dimension: $\frac{\text{mm}}{\text{inch}}$

