

IDC SOCKET CONNECTOR (2.00mm)

101-2 Series

Material

Insulator : P.B.T.+30% Glass Fiber (UL94V-0)

Contact : Phosphor Bronze or Brass

Contact Plated : Gold over Nickel or Tin

Specification

Current Rating : 1A



Insulation Resistance : 1000M Ω Min. at 500V DC

Dielectric Withstanding Voltage : 500V AC for 1 Minute

Operation Temperature : -55°C~ +105°C

Contact Resistance : 15m Ω Max

Dimension: $\frac{\text{mm}}{\text{inch}}$

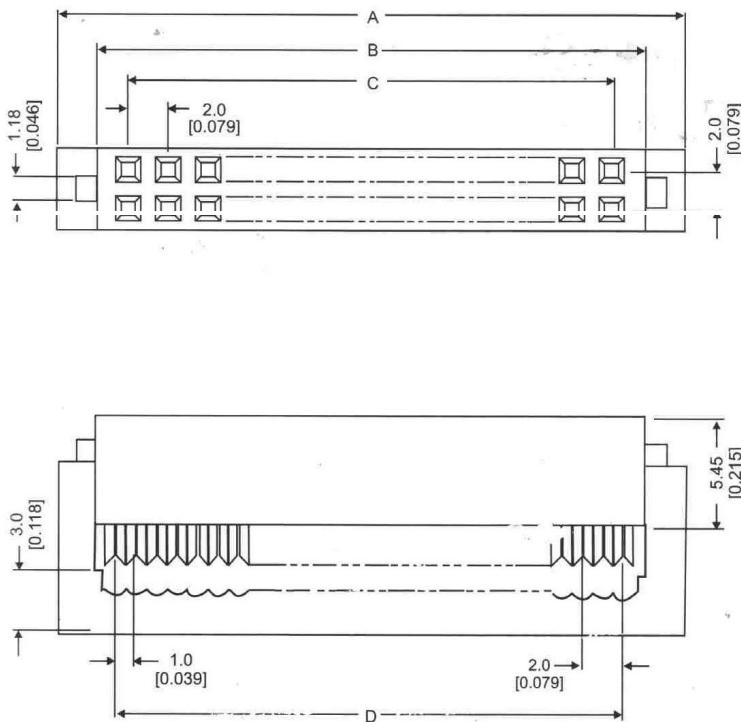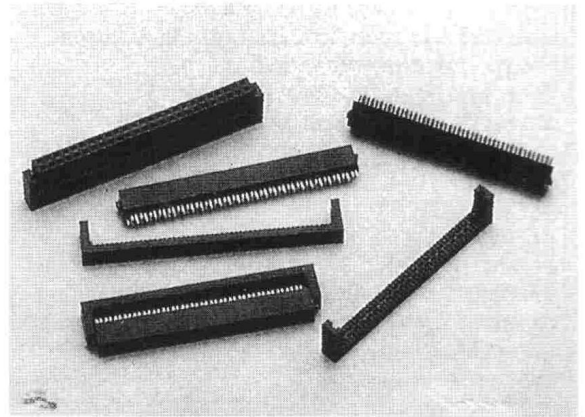

No. of Contacts	Dim B	Dim A	Dim. C	Dim. D
20	21.20 [0.835]	25.12 [0.989]	18.00 [0.709]	19.00 [0.748]
22	23.20 [0.913]	27.12 [1.068]	20.00 [0.787]	21.00 [0.827]
24	25.20 [0.992]	29.12 [1.146]	22.00 [0.866]	23.00 [0.906]
26	27.20 [1.071]	31.12 [1.225]	24.00 [0.945]	25.00 [0.984]
34	35.20 [1.386]	39.12 [1.540]	32.00 [1.260]	33.00 [1.299]
36	37.20 [1.462]	41.12 [1.619]	34.00 [1.339]	35.00 [1.378]
40	41.20 [1.622]	45.12 [1.776]	38.00 [1.496]	39.00 [1.535]
44	45.20 [1.780]	49.12 [1.934]	42.00 [1.654]	43.00 [1.693]
50	51.20 [2.016]	55.12 [2.170]	48.00 [1.890]	49.00 [1.929]
68	69.20 [2.724]	73.12 [2.879]	66.00 [2.598]	67.00 [2.638]

Order Information

Series No .	Strain Relief	No . Of Contacts	Contact plating	
101-2	N	44	S	(G) ↓ Gray color

N:w/o S.R.

Note: 1. Only available for without polarizing convex & Strain Relief type.
2. Normal Insulator color is black, for Gray color, put (G) at end of P/N
• Plating code reference page 1.