
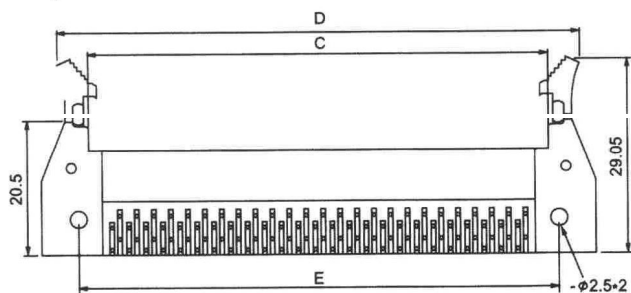
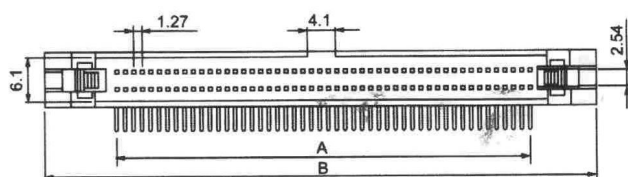





SCSI II DUAL ROW HEADER(1.27mm)

301-1 Series


POSITION	A	B	C	D	E	F
20P	11.43	30.95	18.75	29.35	21.59	32.36
26P	15.24	34.76	22.56	33.16	25.40	36.18
32P	19.05	38.57	26.37	36.97	29.21	39.98
34P	20.32	39.84	27.64	38.24	30.48	41.25
40P	24.13	43.65	31.45	42.05	34.29	45.06
50P	30.48	50.00	37.80	48.40	40.64	51.41
52P	31.75	51.27	39.07	49.67	41.91	52.68
60P	36.83	56.35	44.15	54.75	46.99	57.76
68P	41.91	61.43	49.23	59.83	52.07	62.84
80P	49.53	69.05	56.85	67.45	59.69	70.46
100P	62.23	81.75	69.55	80.25	72.39	83.16

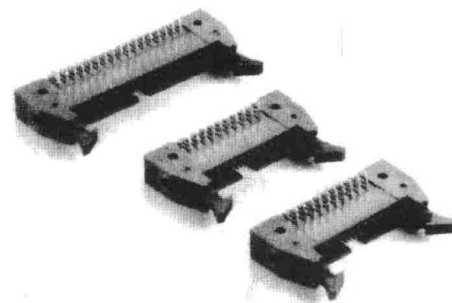

RIGHT ANGLE

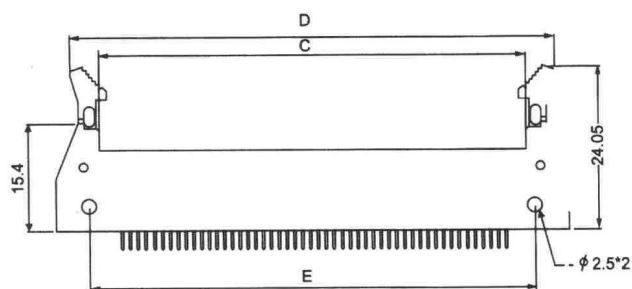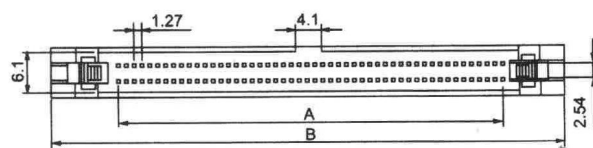


STRAIGHT




SCSI II DUAL ROW HEADER(1.27mm)

301-1 Series

P.C.B.LAYOUT PATTEN

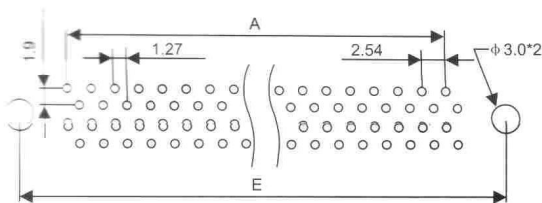

LAYORY FOR:20P.30P.40P.60P.68P.80P.100P.

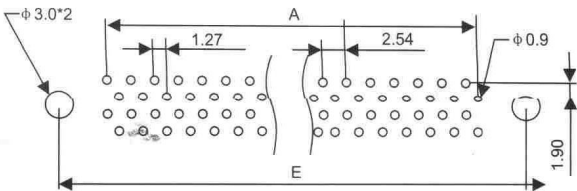

LAYOUT FOR:26P.34P.50P

Order Information

301-1	S	020	P	G	3
1	2	3	4	5	6

1.SERIES NO .
301-1

4.CONTACT TYPE
P=NON DISTRIBUTION

6.INSULATOR COLOR
3=BLACK

2.CONTACT TYPE
S=STRAIGHT
R=RIGHT ANGLE

5.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
C=15 μ" GOLD
D=30 μ" GOLD

3. CONTACT NUMBER
020 026 032 034 040
050 052 060 068 080
100