


2.0mm Shrouded Header Straight & R/A & SMD Type

301-2 Series/BOX/ 2017 Series


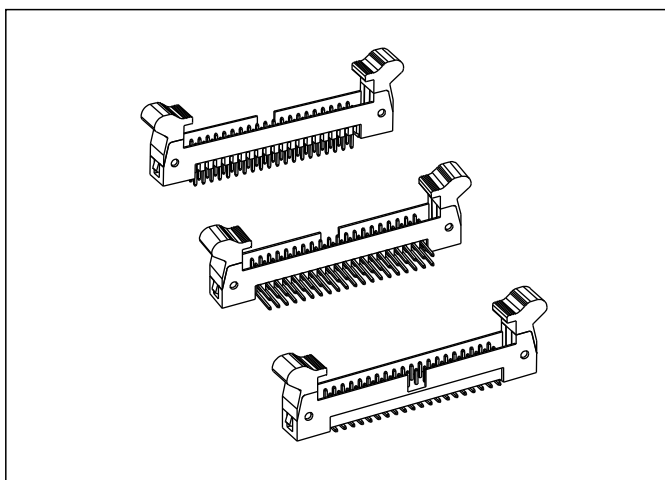


Specifications


Current rating:2.0AAC/DC
Voltage rating:250V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:500V AC for one minute
Operating temperature range:-40°C to +105°C

Material and Finish


Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Gold Plated

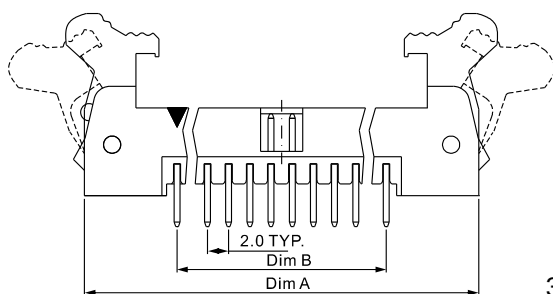

301-2S-2*XXP
(XX:NO. of Persition
Per Row 10 thru 50)



301-2R-2*XXP
(XX:NO. of Persition
Per Row 10 thru 50)

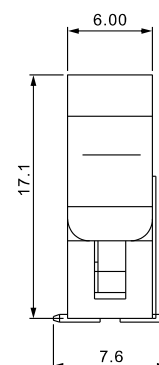

301-2SMT-2*XXP
(XX:NO. of Persition
Per Row 10 thru 50)


Engineering Dimension

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
10	25.70	8.00	30	45.70	28.00
12	27.70	10.00	32	47.70	30.00
14	29.70	12.00	34	49.70	32.00
16	31.70	14.00	40	55.70	38.00
20	35.70	18.00	44	59.70	42.00
22	37.70	20.00	50	65.70	48.00
24	39.70	22.00	68	83.70	66.00
26	41.70	24.00			


Ordering Information

301-2S-2*XXP
301-2R-2*XXP
301-2SMT-2*XXP
(XX:NO. of Persition
Per Row 10 thru 50)

Recommended PCB Layout

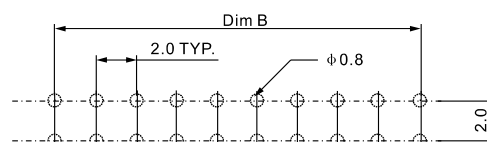

301-2S-2*XXP (XX:NO. of Persition
301-2R-2*XXP Per Row 10 thru 50)

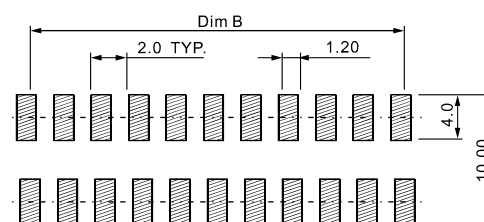

301-2SMT-2*XXP(XX:NO. of Persition
Per Row 10 thru 50)Unit:mm