

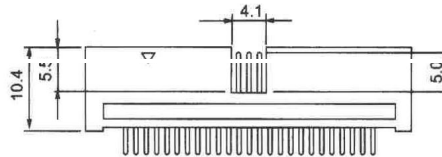

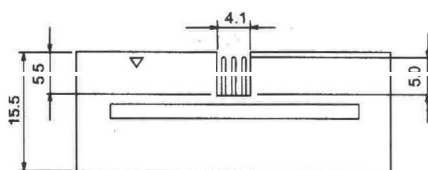
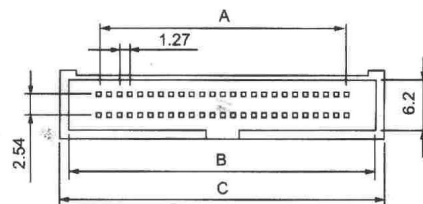
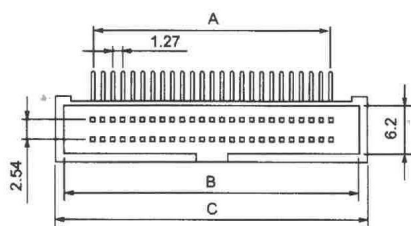


# SCSI II BOX HEADER (1.27X2.54mm) 302-1/A-4 Series



## P.C.B.LAYOUT PATTEN

| POSITION | A     | B     | C     |
|----------|-------|-------|-------|
| 20P      | 11.43 | 18.75 | 20.95 |
| 26P      | 15.24 | 22.56 | 24.76 |
| 32P      | 19.05 | 26.37 | 28.57 |
| 34P      | 20.32 | 27.64 | 29.84 |
| 40P      | 24.13 | 31.45 | 33.65 |
| 50P      | 30.48 | 37.80 | 40.00 |
| 52P      | 31.75 | 38.07 | 41.27 |
| 60P      | 36.83 | 44.15 | 46.35 |
| 68P      | 41.91 | 49.23 | 51.43 |
| 80P      | 49.53 | 56.85 | 59.05 |
| 100P     | 62.23 | 69.55 | 71.15 |

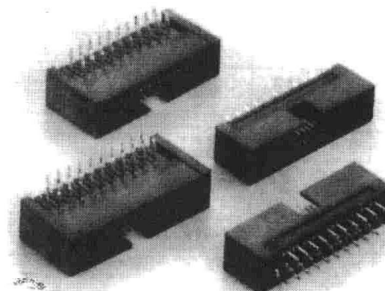

RIGHT ANGLE

STRAIGHT

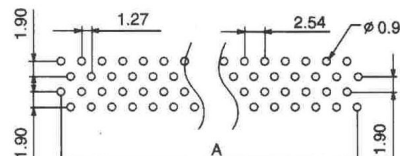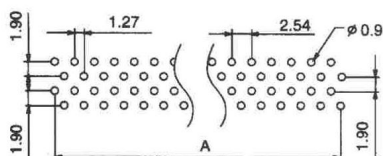

LAYOUT FOR:20P.30P.40P.60P.68P.80P.100P.

LAYOUT FOR:26P.34P.50P

unit:mm

## Order Inormation

|         |     |   |   |   |   |
|---------|-----|---|---|---|---|
| 302-1-4 | 020 | P | G | S | 3 |
| 1       | 2   | 3 | 4 | 5 | 6 |

### 1.SERIES NO .

302-1-4

### 3.CONTACT TYPE

P=NON DISTRIBUTION

### 5.PROCESS OPTION

S=STRAIGHT

R=RIGHT ANGLE

### 2.CONTACT NUMBER

020 026 032 034 040

050 052 060 068 080

100

### 4.CONTACT PLATING

S=SELECTIVE GOLD

G=GOLD FLASH

C=15 μ" GOLD

D=30 μ" GOLD

### 6.INSULATOR COLOR

3=Black

4=Grey