
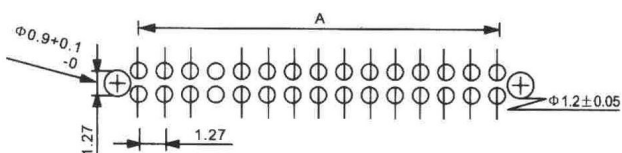

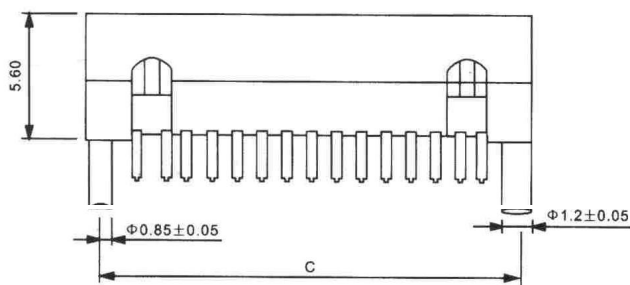

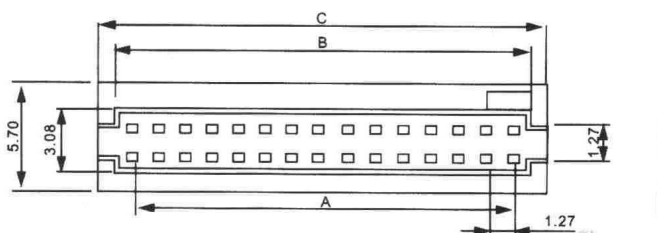


SCSI II BOX HEADER(1.27X1.27mm)





302-1/B-2 Series

SPECIFICATION

Current Rating	1Amps
Insulator resistance	5000M Ω Min
Dielectric withstanding Voltage	AC 500V
Operating Temperature	- 40°C~ +105°C
Max Processing Temp	(230°C for 30~60 seconds)(260°C for 10 seconds)
Contact Material:	Phosphor, bronze
Insulator Material:	Polyester, UL 94V-0
	Standard: Nylon-6T

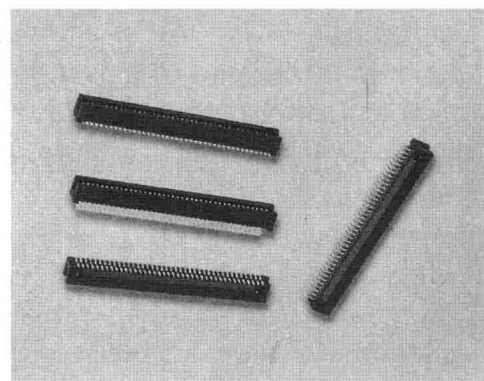

2x50	62.23	63.90	65.27	66.54
2x45	55.88	57.55	58.92	60.19
2x40	49.53	51.20	52.57	53.84
2x35	43.18	44.85	46.22	47.49
2x30	36.83	38.50	39.87	41.14
2x25	30.48	32.34	33.52	34.79
2x22	26.67	28.34	29.71	31.04
2x20	24.13	25.80	27.17	28.44
2x15	17.78	19.45	20.32	22.09
2x12	13.97	15.64	17.01	18.34
2x10	11.13	13.10	14.47	15.74
2x5	5.08	6.75	8.12	9.39
SIZE	A	B	C	D

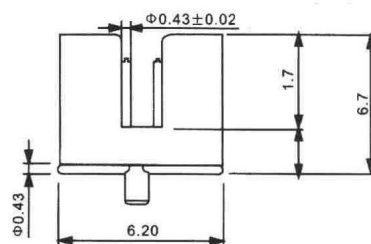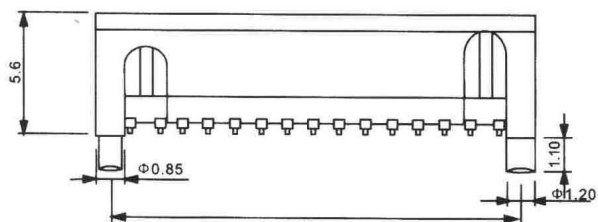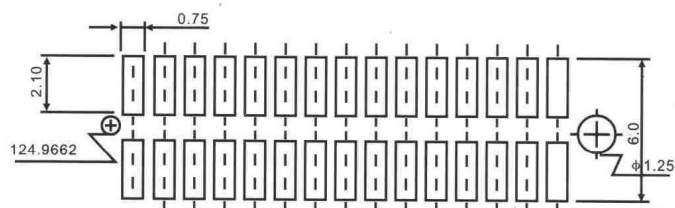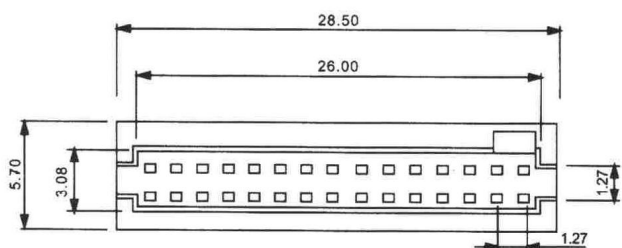


Order Information

Series No.	contact Type	contact Type	NO. Of contact	contact Plating	Body Option	Insulator Color
301-1	B	S	2x20	G	A	3
	A=1.27X2.54mm B=1.27x1.27mm	S=straight R=Right Angle				3=Black

SCSI II BOX HEADER (1.27X1.27mm) 302-1/B-2 Series

SPECIFICATION

Current Rating	1A
Insulator resistance	5000 M Ω min.
Dielectric withstanding	AC500V
Operating Temperature	-40°C~+105°C
Max Processing Temperature:	(230°C for 30~60 seconds)(260°C for 10seconds)
Contact Material:	Phosphor,bronze
Insulator Material:	Polyester,UL 94V-0
	Standard:Nylon-6T

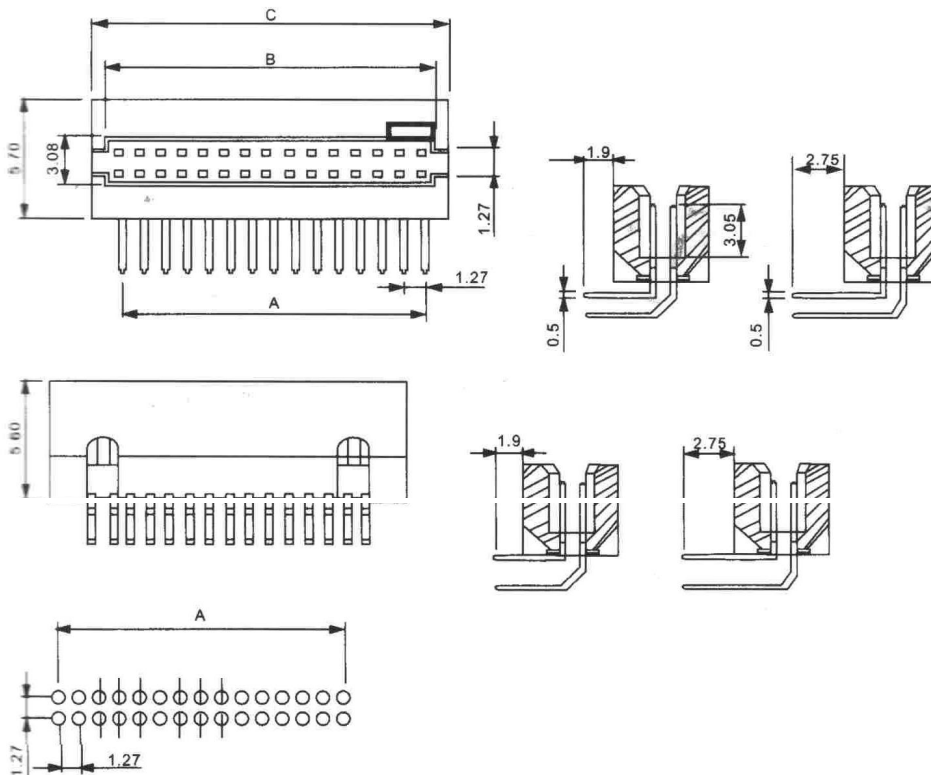

2×50	62.23	63.90	65.27
2×45	55.88	57.55	58.92
2×40	49.53	51.20	52.57
2×35	43.18	44.85	46.22
2×30	36.83	38.50	34.87
2×25	30.48	32.34	33.52
2×22	26.67	28.34	29.71
2×20	24.13	25.80	27.17
2×15	17.78	19.45	20.32
2×12	13.97	15.64	17.01
2×10	11.13	13.10	14.47
2×5	5.08	6.75	8.12
SIZE	A	B	C

Order Information

302-1	/B	R	2x24	G	3
1	2	3	4	5	6

1.Series No .

302-1

2.Contact Type

A=1.27x.2.54mm
B=1.27x1.27mm

3.Contact type

S=Straight
R=Right Angle
SMT

4.Contact Number

010 020 024 030 040 044
050 060 070 080 090 100

5.Contact Plating

S=selective Gold
G=Gold Flash
C=15u" Gold
D=30u" Gold

6.Contact color

3=Black
4=Grey