

DIN 41612 THREE ROW (2.54mm)

POSITION	A	B	C
96F	90.00	95.00	85.00
48F	50.00	55.00	44.40

C TYPE (FEMALE-STRAIGHT)

POSITION	A	B	C
96M	88.90	94.00	85.20
48M	48.26	54.00	44.60



C TYPE (MALE-RIGHT ANGLE)

POSITION	A	B	C
96F	88.90	94.00	85.00
48F	48.20	54.00	44.40


R TYPE (FEMALE-RIGHT ANGLE)

POSITION	A	B	C
96M	90.00	95.00	85.20
48M	50.00	55.00	44.60


R TYPE (MALE-STRAIGHT)

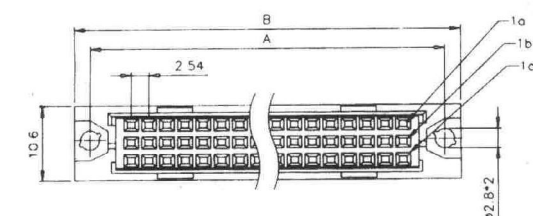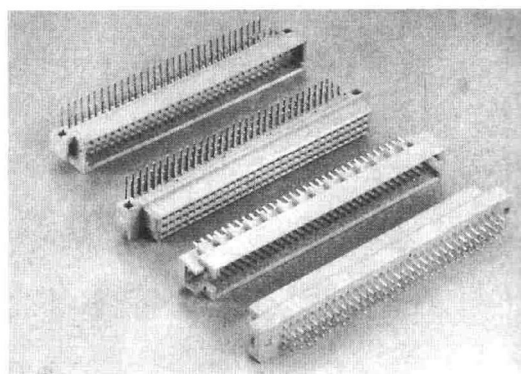


C TYPE (FEMALE-STRAIGHT)

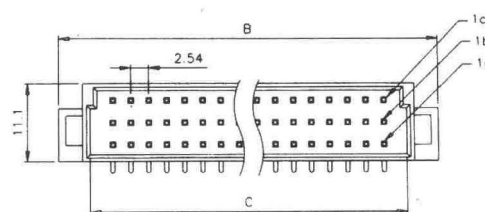

C TYPE (MALE-RIGHT ANGLE)

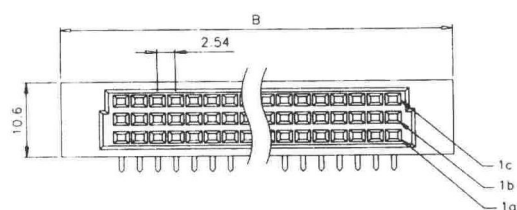


R TYPE (FEMALE RIGHT ANGLE)

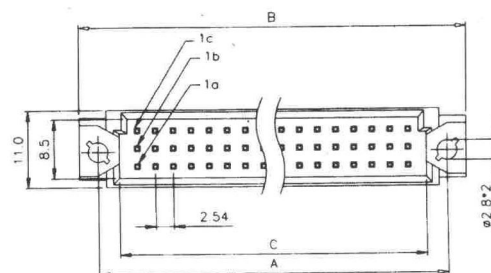


R TYPE (MALE-STRAIGHT)

DIN 41612 THREE ROW (2.54mm)


P.C.B.LAYOUT PATTERN

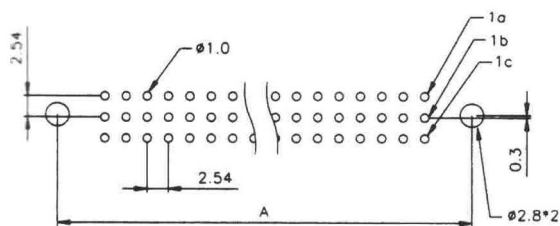


C TYPE (FEMALE-STRAIGHT)

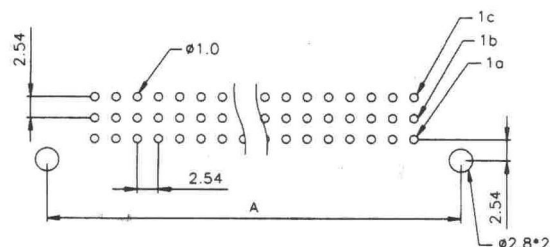

C TYPE (MALE-RIGHT ANGLE)

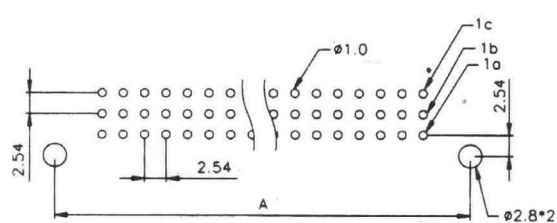

R TYPE (FEMALE-RIGHT ANGLE)

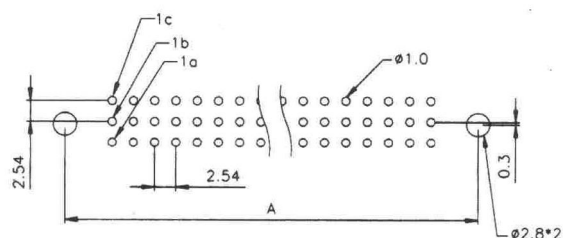

R TYPE (MALE-STRAIGHT)

Order Information

3	3	96	C	F	S	L	170
1	2	3	4	5	6	7	8

1. Plastic rows: 3 rows

2. Pin rows: 3 rows

3. Total pins: 24, 48, 96 pins

4. Type: 3 plastic rows: R.C type

Where R.C type covers

B: M/90°, F/180° ; Q: M/180°, F/90°

R: M/180°, F/90° ; C: M/90°, F/180°

5. Male/ female : M-male , F-female

6. Straight/right angle: Straight-s:

right angle-R

7. Long/short: long-L; Short-S

8. Pin length:

① 4.8mm-048

② 13mm-130

③ 14.7mm-147

④ 17mm-170