


CENTRONIC IDC FOR FLAT CABLE


57F Series

Dimension: $\frac{\text{mm}}{\text{inch}}$

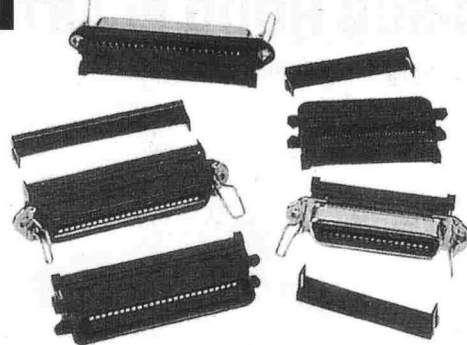



MALE

Male

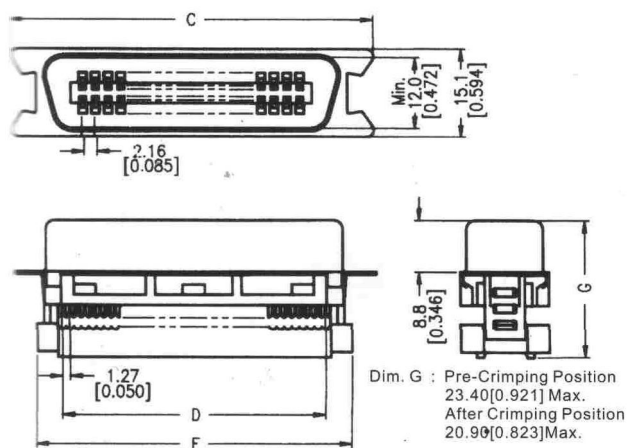


FEMALE

Female

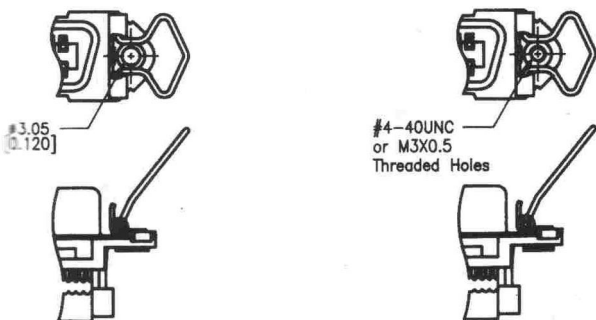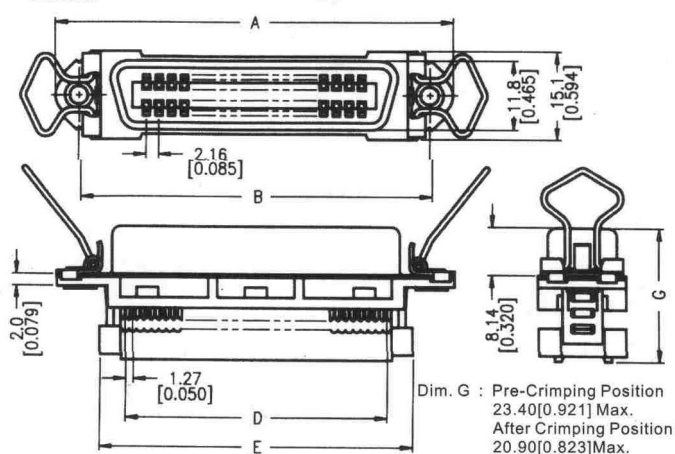

Strain Relief

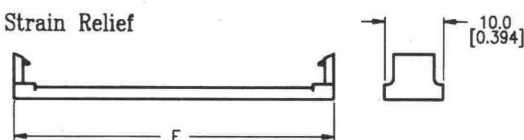

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
24	54.7 [2.154]	46.8 [1.843]	48.6 [1.913]	29.21 [1.150]	35.5 [1.398]	37.5 [1.476]
36	67.7 [2.665]	59.7 [3.350]	61.6 [2.425]	44.45 [1.750]	53.3 [2.098]	54.4 [2.142]
50	82.8 [3.260]	74.9 [2.949]	76.7 [3.020]	62.33 [2.450]	68.5 [2.697]	70.5 [2.776]

Series No.

Contact type

No. Of Contacts

Mounting type

Contact plating

57F

30

36

M

S

(4U)

Male :30
Female:40

M:Matal
H:Plastic

Threaded

- Note:** 1.For Female, if with threaded, put(4U):4-40 UNC, or (M3):MM size at end of P/N.
2.Strain Relief is optioned, if needed,put(SR) at end of P/N.
3.Contact plating reference page 1.