

DIP PLUG(1.27×2.54mm)





601-1 Series

Material & Finish


Insulator: P.B.T. +30%G.F.UL94V-0
Contact: Phosphor bronze or Brass
Contact plated: Tin

Specification

Current rating: 1A AC DC
Insulation resistance: 1000M Ω Min
Voltage rating: 250V AC
Contact resistance: 15m Ω Max
Temperature range: -40 $^{\circ}$ C - +105 $^{\circ}$ C
Withstanding voltage: 500V AC/Min
Applicable wires: AWG #28-1.27mm-flat cable
Applicable P.C thickness: 1.6mm

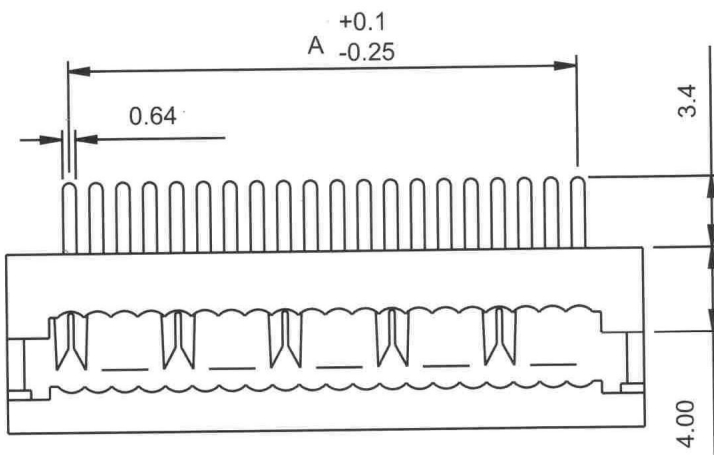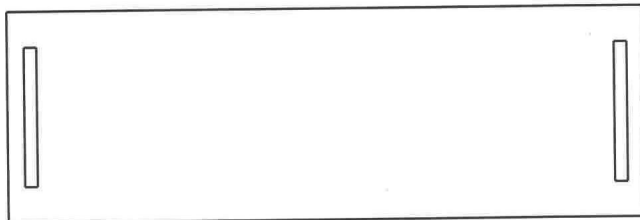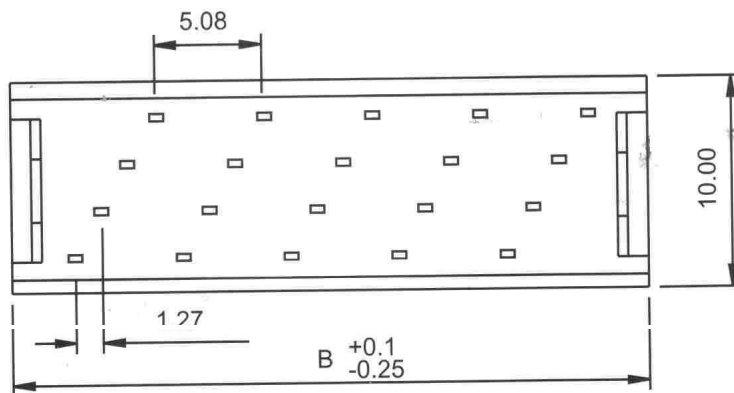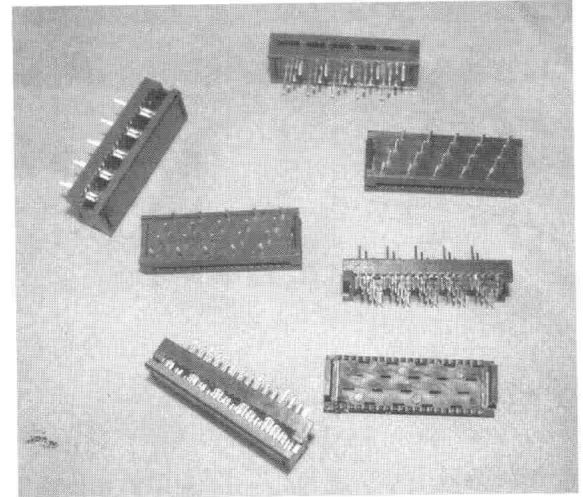

No.of Contacts	Dim. A	Dim. B
10	11.43	18.17
16	19.05	25.79
20	24.13	30.87
26	31.75	38.49
34	41.91	48.65
40	49.53	56.27
50	62.23	68.97
60	74.93	81.67

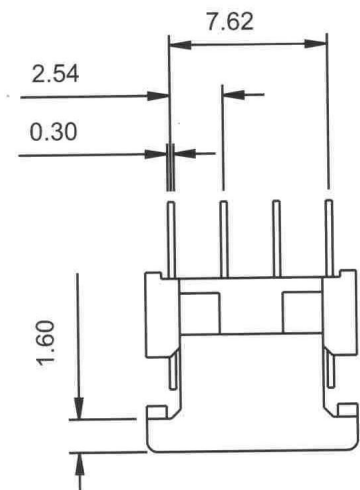

Order Information

Series No .

601-1

No .of Contacts

60

Contact Type

P

P=Non Distribution

Contact Plating

T

T=Tin
S=Selective Gold
G=Gold Flash

Insulator Color






3

3=Black
4=Grey

DIP PLUG(1.27x1.7mm)

601-1 Series

POSITION	A	B	C
68P	41.91	45.60	48.30
80P	49.53	53.22	55.92

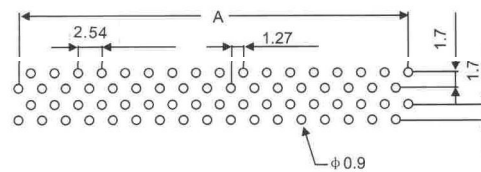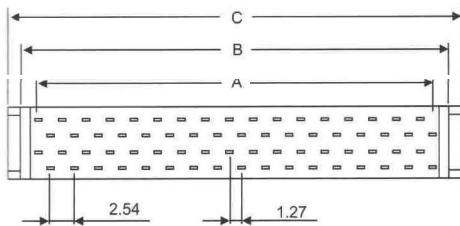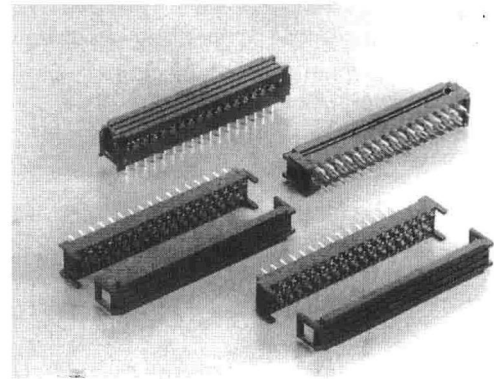

P.C. BOARD LAYOUT PATTERN

Order Information

601-1	—	68	P	T	3
1		2	3	4	5

1. SERIES NO .

601-1

2. CONTACT NUMBER

60 68 72 80 100

3. CONTACT TYPE

P=NON DISTRIBUTION

4. CONTACT PLATING

T=TIN

S=SELECTIVE GOLD

G=GOLD FLASH

5. INSULATOR COLOR

3=BLACK

4=GRAY