

DIP PLUG(2.0mm)

601-2 Series

I.D.C Dip connector Grid 2.0 mm* 2.0mm




MATERIAL

CONTACT	Bronze or Brass
INSULATOR	PBT +30% glass fiber(UL-94V-0)
COLOR	Black
CONTACT PLATED	Gold over nickel or Tin

ELECTRICAL

CURRENT RATING	1A
OPERATING TEMPERATURE	-55°C~+105°C
VOLTAGE	500V min 60Hz
Dielectric withstanding	AC 500 V/min

INSULATION RESISTANCE 1000 MΩ

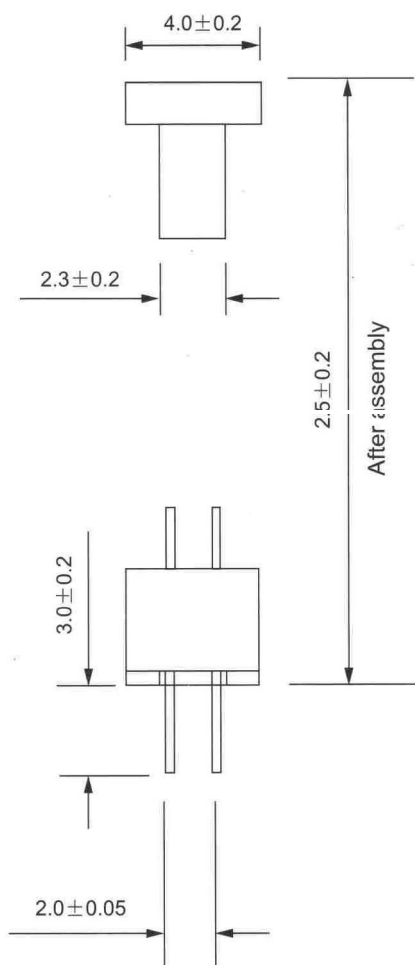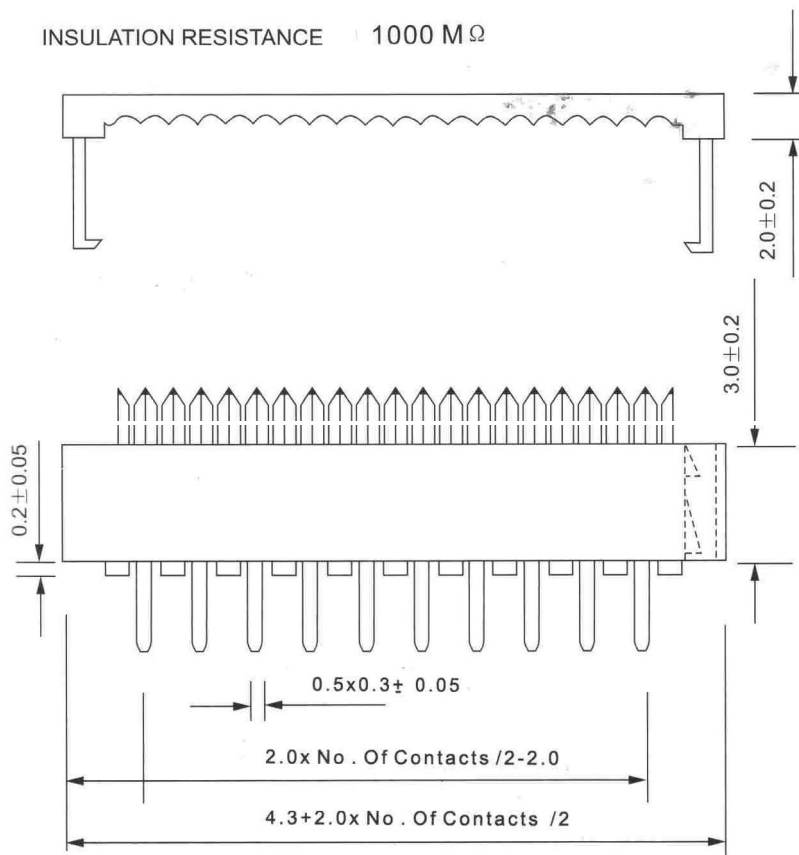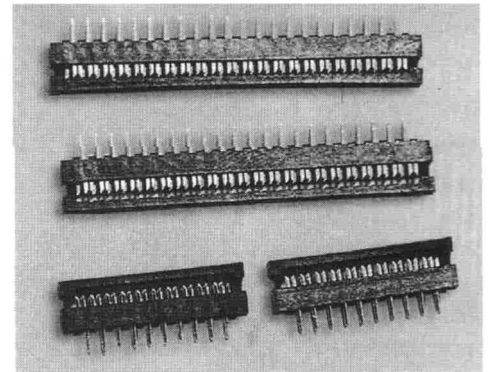

Order Information

601-2	40	P	T	3
1	2	3	4	5

1. SERIES NO.
601-2

2. CONTACT NUMBER
10. 12. 16. 20. 24. 26.
30. 34. 40. 44. 50

3. CONTACT TYPE
P=NON DISRIBURION

4. CONTACT PIATED
TIN GOLD 3u " 5u " 10u " 15u " 20u " 30u " G/T
T G A B C D E F G

5. INSULATOR COLOR
3=BLACK