

TRANSITION PLUG CONNECTOR (2.54x2.54mm)

601 Series






Material

Insulator : P.B.T.+30% Glass Fiber (UL94V-0)
Contact : Phosphor Bronze or Brass
Contact Plated : Gold over Nickel or Tin

Specification


Current Rating : 1A
Insulation Resistance : 1000M Ω Min. at 500V DC
Dielectric Withstanding Voltage : AC 500V/min inute
Operating Temperature: -55°C ~ +105°C
Contact Resistance : 15m Ω Max.

Dimension: $\frac{\text{mm}}{\text{inch}}$

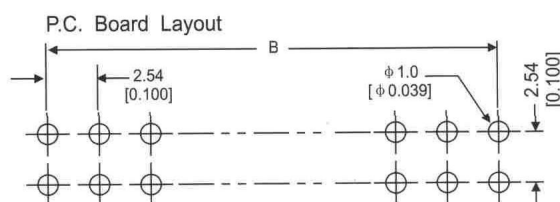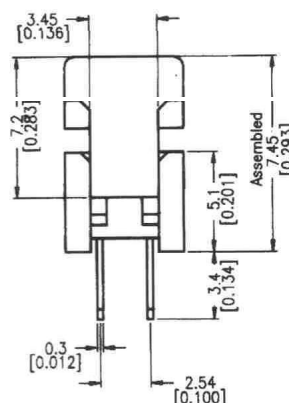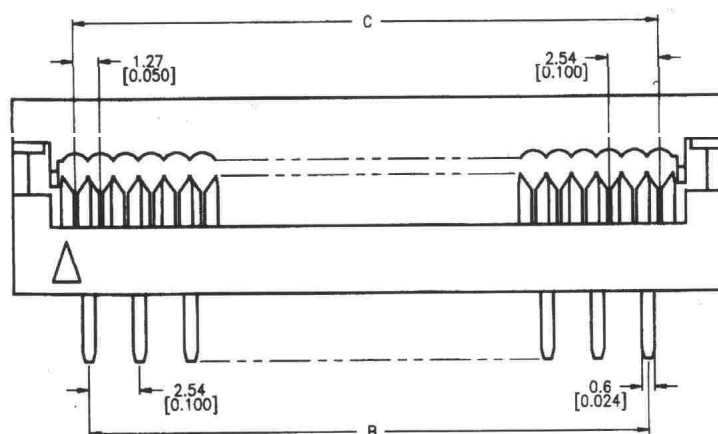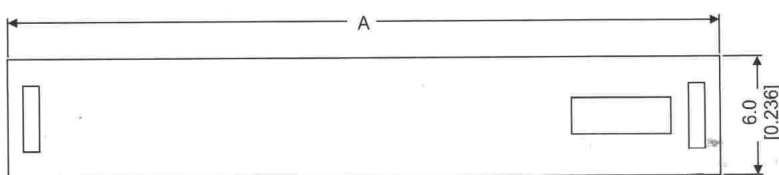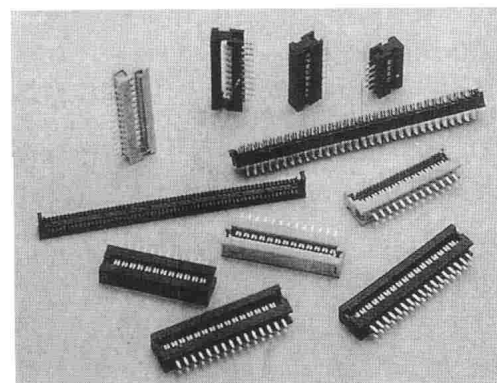

No. of Contacts	Dim. A	Dim. B	Dim. C
8	15.28 [0.602]	7.62 [0.300]	8.89 [0.350]
10	17.82 [0.702]	10.16 [0.400]	11.43 [0.450]
14	22.90 [0.902]	15.24 [0.600]	16.51 [0.650]
16	25.44 [1.002]	17.78 [0.700]	19.05 [0.750]
20	30.52 [1.202]	22.86 [0.900]	24.13 [0.950]
24	35.60 [1.402]	27.94 [1.100]	29.21 [1.150]
26	38.14 [1.502]	30.48 [1.200]	31.75 [1.250]
28	40.68 [1.602]	33.02 [1.300]	34.29 [1.350]
30	43.22 [1.702]	35.56 [1.400]	36.83 [1.450]
34	48.30 [1.902]	40.64 [1.600]	41.91 [1.650]
40	55.92 [2.202]	48.26 [1.900]	49.53 [1.950]
50	68.63 [2.702]	60.96 [2.400]	62.23 [2.450]
60	81.32 [3.202]	73.66 [2.900]	74.93 [2.950]
64	86.40 [3.402]	78.74 [3.100]	80.01 [3.150]

Order Information

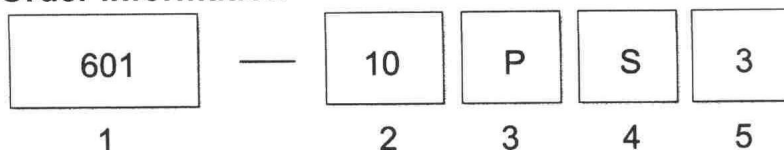

1.SERIES number
601

2.CONTACT NO.
08 10 14 16 20 24
26 28 30 34 40 50 60
64

3.CONTACT TYPE
P=NON DISTRIBUTION

4.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
C=15 μ " GOLD
D=30 μ " GOLD

5.INSULATOR COLOR
3=BLACK
4=GREY