

DIP PLUG CONNECTOR

606 Series

Material

Insulator : P.B.T.+30% Glass Fiber (UL94V-0)






Contact : Phosphor Bronze or Brass

Contact Plated : Gold over Nickel or Tin

Specification


Current Rating : 1A
 Insulation Resistance : 1000M Ω Min. At 500V DC
 Dielectric Withstanding Voltage : AC 500V/min
 Operating Temperature: -55°C ~ +105°C
 Contact Resistance : 15m Ω Max.

Dimension: $\frac{\text{mm}}{\text{inch}}$

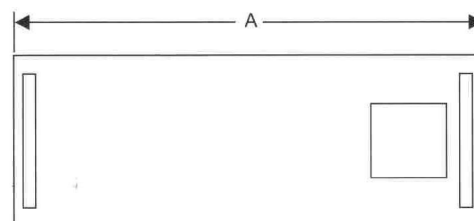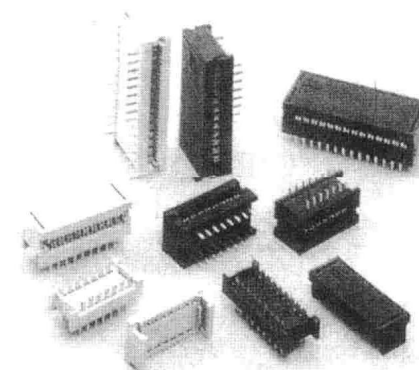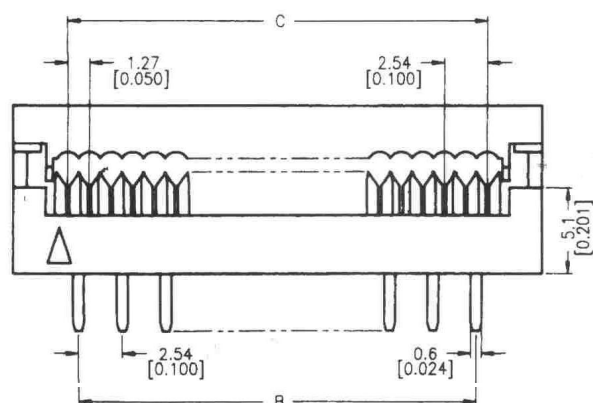

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
8	15.72 [0.619]	7.62 [0.300]	8.89 [0.350]	7.62 [0.300]	11.08 [0.436]
10	18.26 [0.719]	10.16 [0.400]	11.43 [0.450]	7.62 [0.300]	11.08 [0.436]
14	23.34 [0.919]	15.24 [0.600]	16.51 [0.650]	7.62 [0.300]	11.08 [0.436]
16	25.8 [1.019]	17.78 [0.700]	19.05 [0.750]	7.62 [0.300]	11.08 [0.436]
18	28.42 [1.119]	20.32 [0.800]	21.59 [0.850]	7.62 [0.300]	11.08 [0.436]
20	30.96 [1.219]	22.86 [0.900]	24.13 [0.950]	7.62 [0.300]	11.08 [0.436]
24	36.04 [1.419]	27.94 [1.100]	29.21 [1.150]	15.24 [0.600]	18.70 [0.736]
28	41.12 [1.619]	33.02 [1.300]	34.29 [1.350]	15.24 [0.600]	18.70 [0.736]
34	48.74 [1.919]	40.64 [1.600]	41.91 [1.650]	15.24 [0.600]	18.70 [0.736]
40	56.36 [2.219]	48.26 [1.900]	49.53 [1.950]	15.24 [0.600]	18.70 [0.736]

Order Information

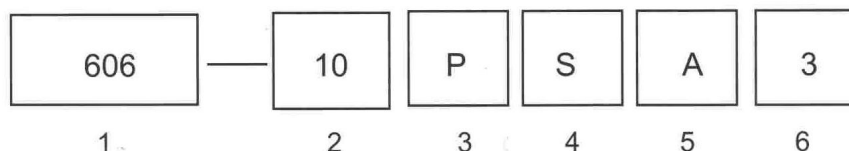

1.SERIES NO .

606

2.CONTACT NUMBER

08 10 14 16 18 20 24
 28 34 40

3.CONTACT TYPE

P=NON DISTRIBUTION

4.COTACT PLATING

S=SELECTIVE GOLD
 G=GOLD FLASH
 C=15 μ " GOLD
 D=30 μ " GOLD

5.ROW SPACING

A=7.62mm
 (POSITION:08 10 14 16 18
 20 24 28 34 40)
 R=15.24mm
 (POSITION:24 28 34 40)

6.INSULATOR COLOR

3=BLACK
 4=GREY