


FPC CONNECTOR DUAL CONTACT DIP TYPE(2.54mm)

6300 Series

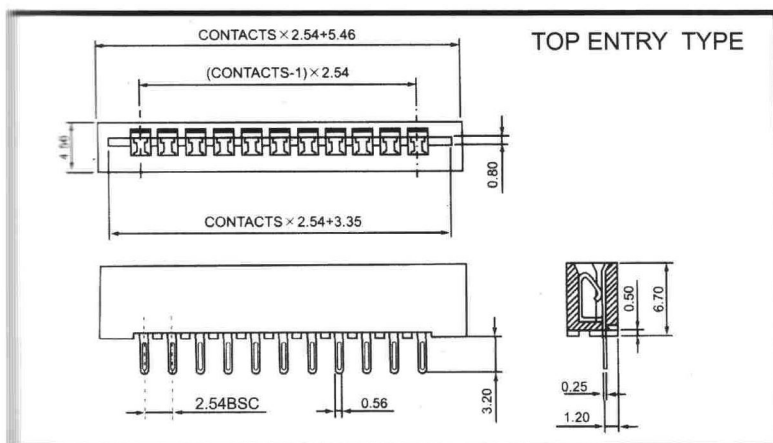

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0
 CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN PLATED OVER NICKEL

SPECIFICATION

1. MECHANICAL DATA



- 1.1 DURABILITY: 15 CYCLES.
- 1.2 OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 1.3 OPERATING VOLTAGE: 200 VAC RECOMMENDED

2. ELECTRICAL DATA


- 2.1 CURRENT RATING: 1A
- 2.2 CONTACT RESISTANCE: $20 \text{ m}\Omega$ max
- 2.3 INSULATION RESISTANCE: $1000 \text{ M}\Omega$ min
- 2.4 WITHSTANDING VOLTAGE: Voltage: AC 1000V/min

HOUSING COLOR: 1. BLACK 2. WHITE

NO. OF CONTACTS: 06 TO 27

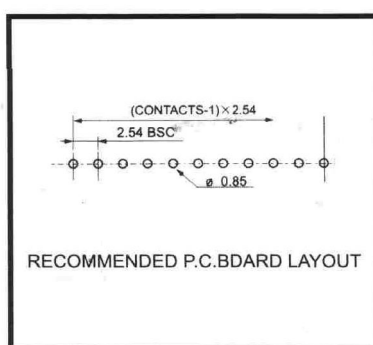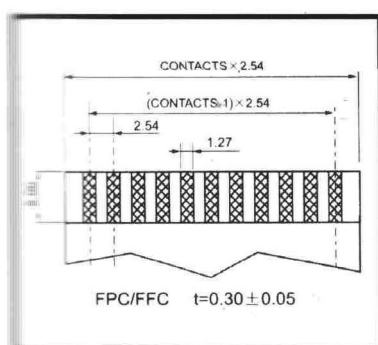

UNIT: mm

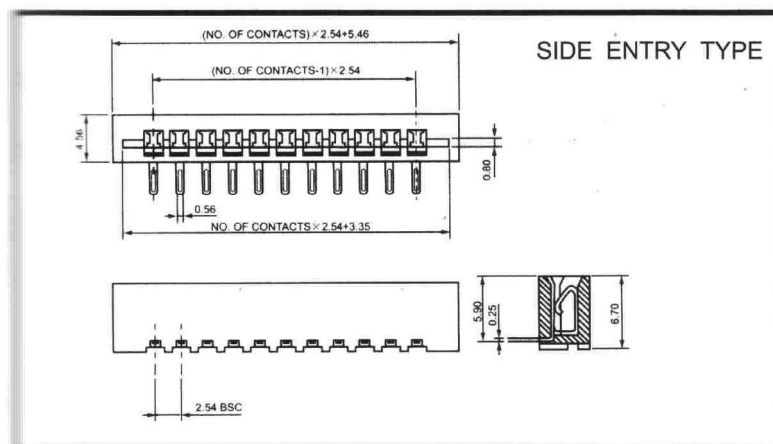

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0
 CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN PLATED OVER NICKEL

SPECIFICATION

1. MECHANICAL DATA



- 1.1 DURABILITY: 15 CYCLES.
- 1.2 OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 1.3 OPERATING VOLTAGE: 200 VAC RECOMMENDED

2. ELECTRICAL DATA

- 2.1 CURRENT RATING: 1A
- 2.2 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
- 2.3 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
- 2.4 WITHSTANDING VOLTAGE: AC 1000 VOLTS RMS.

HOUSING COLOR: 1. BLACK 2. WHITE

NO. OF CONTACTS: 06 TO 27

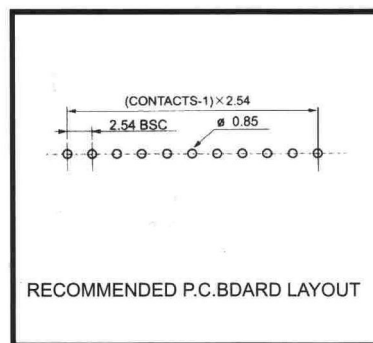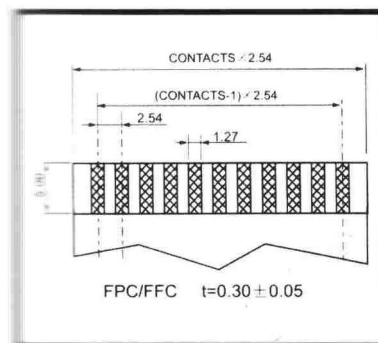

UNIT: mm