

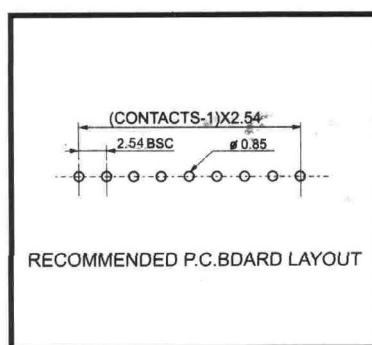
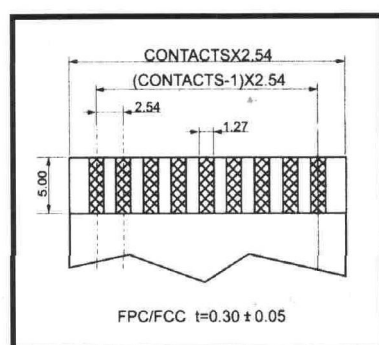
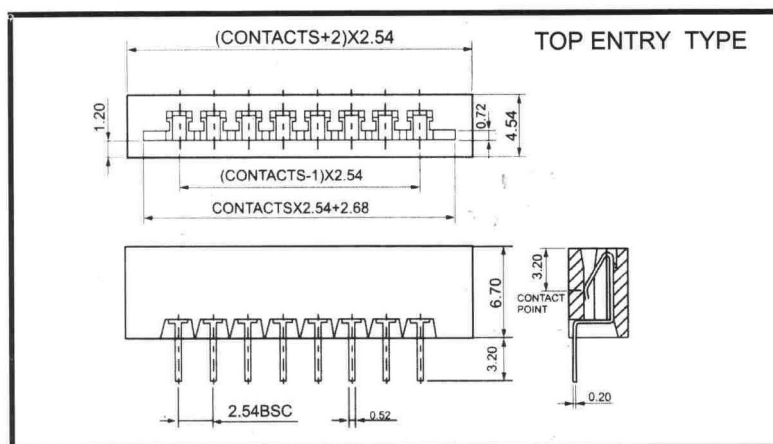
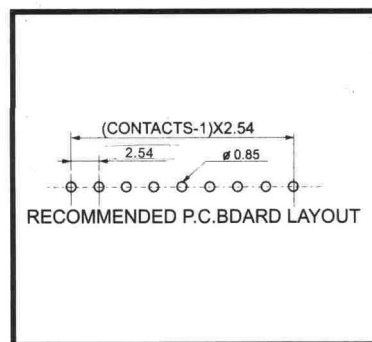


FPC CONNECTOR DIP TYPE(2.54mm)

6300 Series

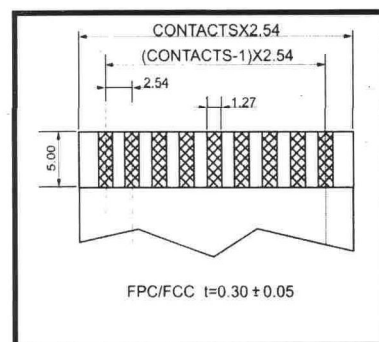

UNIT:mm

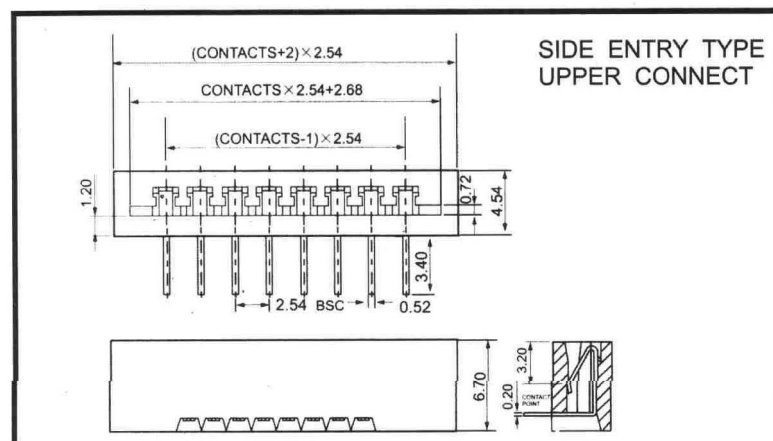

UNIT:mm

MATERIAL

HOUSING:THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOYS

FINISH

CONTACT:TIN PLATED OVER NICKEL

SPECIFICATION

1.MECHANICAL DATA

1.1 DURABILITY:15 CYCLES.

1.2 OPERATING TEMPERATURE:-40°C~+105°C

1.3 OPERATING VOLTAGE:200V AC RECOMMENDED

2.ELECTRICAL DATA

2.1 CURRENT RATING:1A

2.2 CONTACT RESISTANCE:20mΩ max

2.3 INSULATION RESISTANCE:1000MΩ min

2.4 withstanding voltage:AC 1000V/min

NO. OF CONTACTS: 03 TO 21

MATERIAL

HOUSING:THE THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOY

FINISH

CONTACT:TIN PLATED OVER NICKEL

SPECIFICATION

1.MECHANICAL DATA

1.1 DURABILITY:15 CYCLES.

1.2 OPERATING TEMPERATURE:-40°C~+105°C

1.3 OPERATING VOLTAGE:200 VAC RECOMMENDED

2.ELECTRICAL DATA

2.1 CURRENT RATING:1A

2.2 CONTACT RESISTANCE:20 MILLIOHMS MAX.


2.3 INSULATION RESISTANCE:1000MEGAOHMS MIN.

2.4 WITHSTANDING VOLTAGE:AC 1000 VOLTS RMS.

NO.OF CONTACTS:03 TO 21

FPC CONNECTOR DIP TYPE(2.54mm)

6300 Series

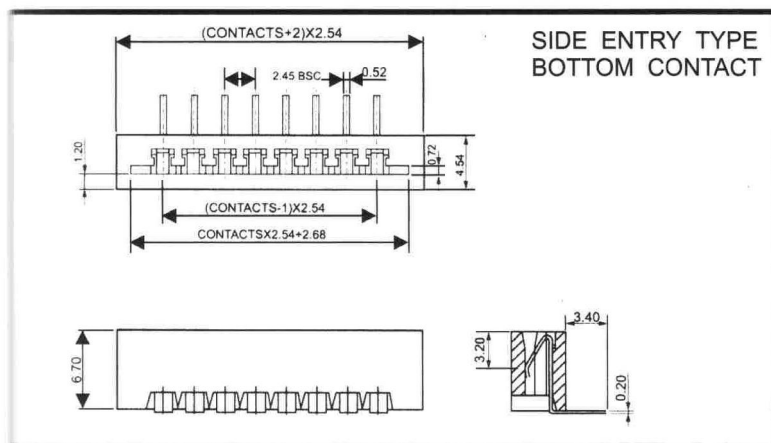

MATERIAL

HOUSING:THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOYS

FINISH

CONTACT:TIN PLATED OVER NICKEL

SPECIFICATION

1.MECHANICAL DATA

1.1 DURABILITY:15 CYCLES.

1.2 OPERATING TEMPERATURE:-40°C~+105°C

1.3 OPERATING VOLTAGE:200 VAC RECOMMENDED
P.C.BOARD

2.ELECTRICAL DATA



2.1 CURRENT RATING:1A

2.2 CONTACT RESISTANCE:20mΩ max

2.3 INSULATION RESISTANCE:1000MΩ min

2.4 WITHSTANDING VOLTAGE:AC 1000V/min

NO.OF CONTACTS:03 TO 21

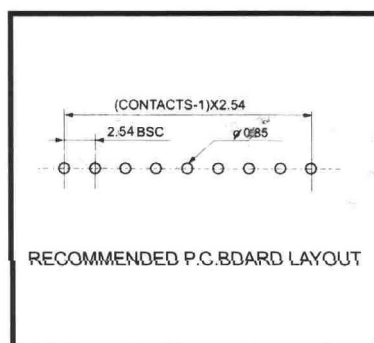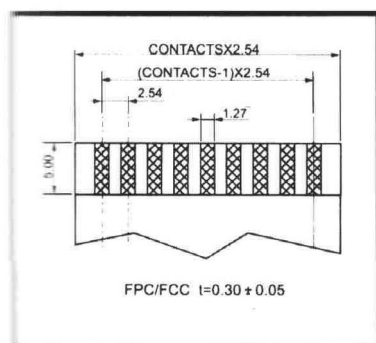

UNIT:mm

Order Information

Series No.	Contact Type	Contact Type	No . Of Contacts	plating
6300	D	S	10	T
	S;Normal Contact D:dual Contact	S;Straight R:Right Angle		