


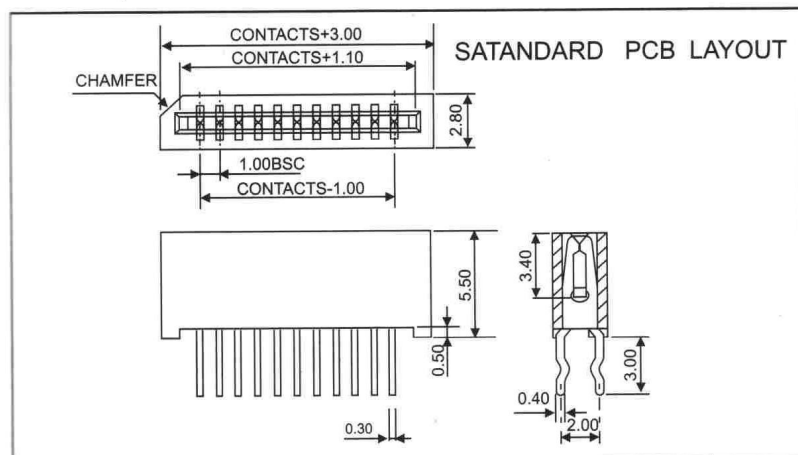

TOP ENTRY

MATERIAL



HOUSING:THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOYS

FINISH




CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION


CURRENT Rating : 0.5A
OPERATING TEMPERATURE:-40°C ~105°C
CONTACT RESISTANCE: 30mΩ max
INSULATION RESISTANCE: 1000MΩ min
DIELEDTRIC STRENGTH: 500VAC/MIN
NO. OF CONTACTS: 4~ 30

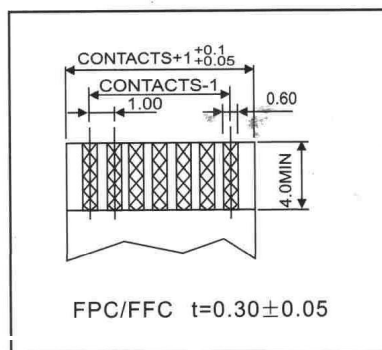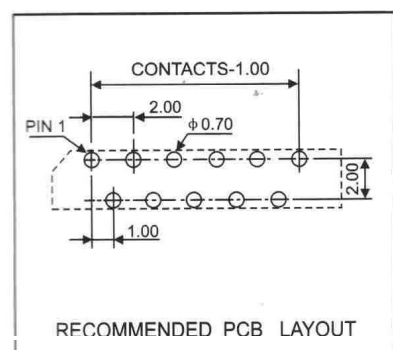

UNIT:mm

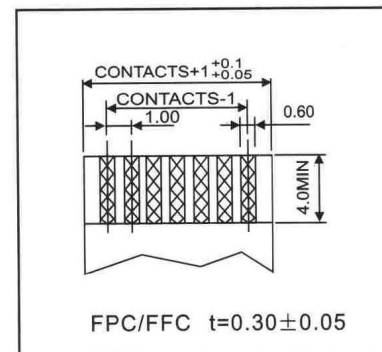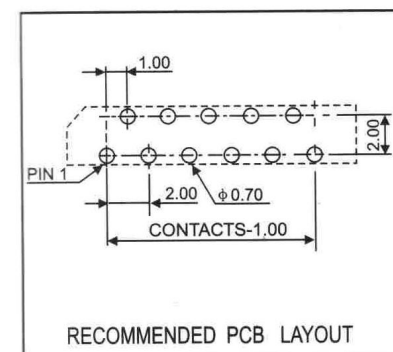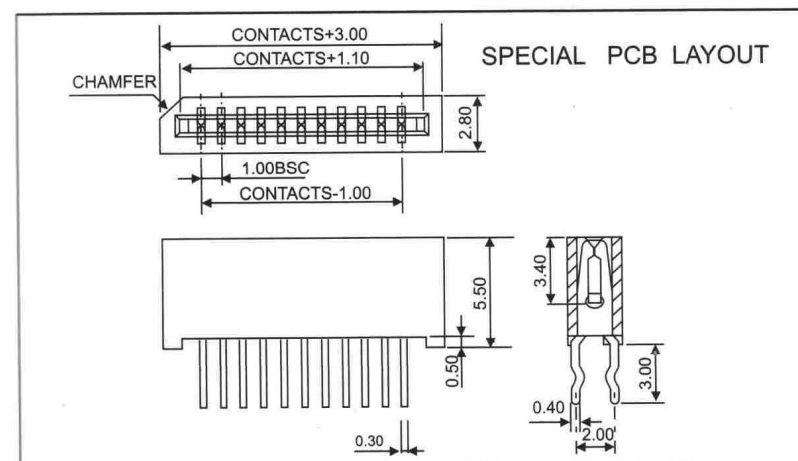

UNIT:mm

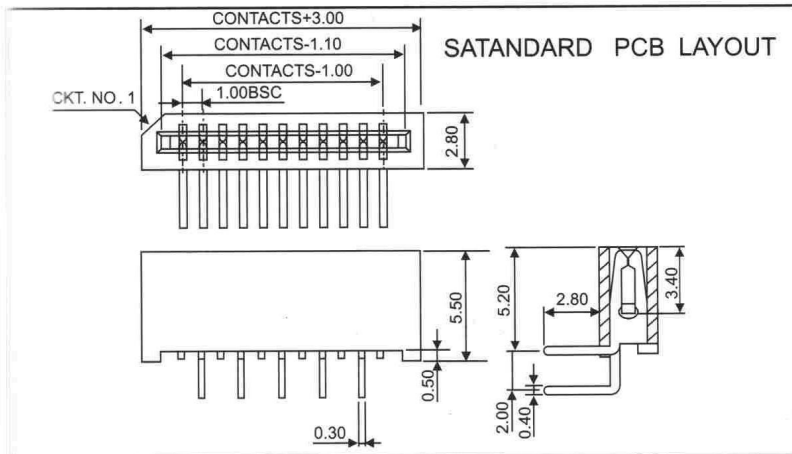

SIDE ENTRY TYPE

MATERIAL



HOUSING:THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOYS

FINISH




CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION


CURRENT Rating : 0.5A
OPERATING TEMPERATURE:-40°C ~105°C
CONTACT RESISTANCE: 30mΩ max
INSULATION RESISTANCE: 1000MΩ min
DIELEDTRIC STRENGTH: 500V AC/ MIN
NO. OF CONTACTS: 4~ 30

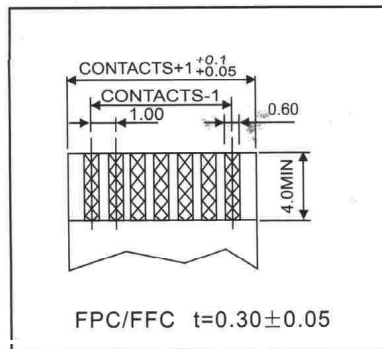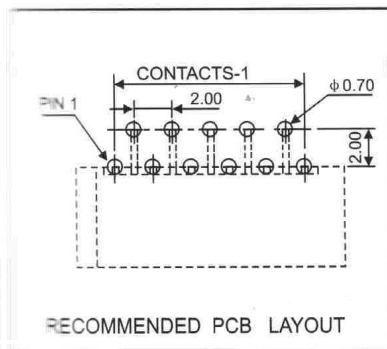

UNIT:mm

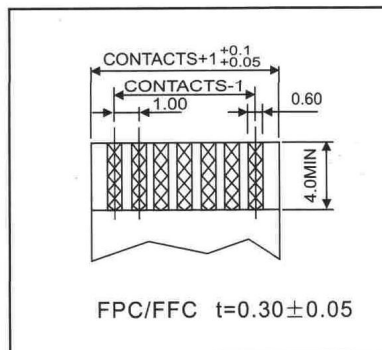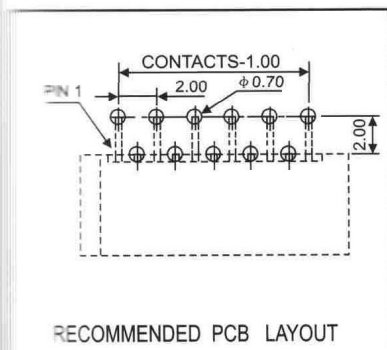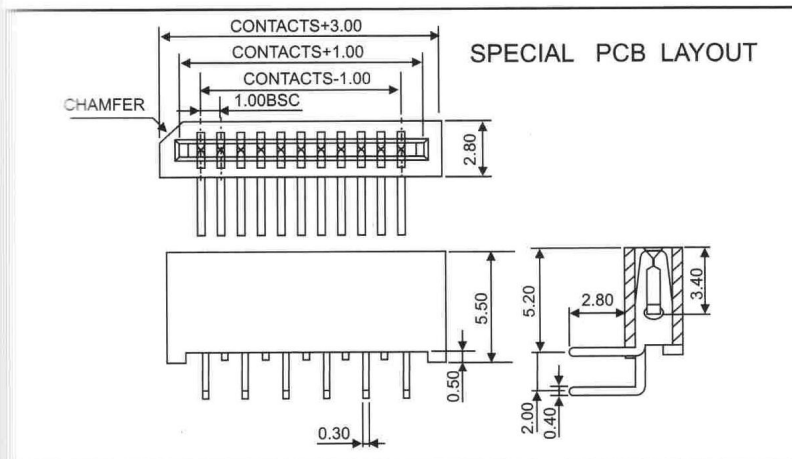

UNIT:mm

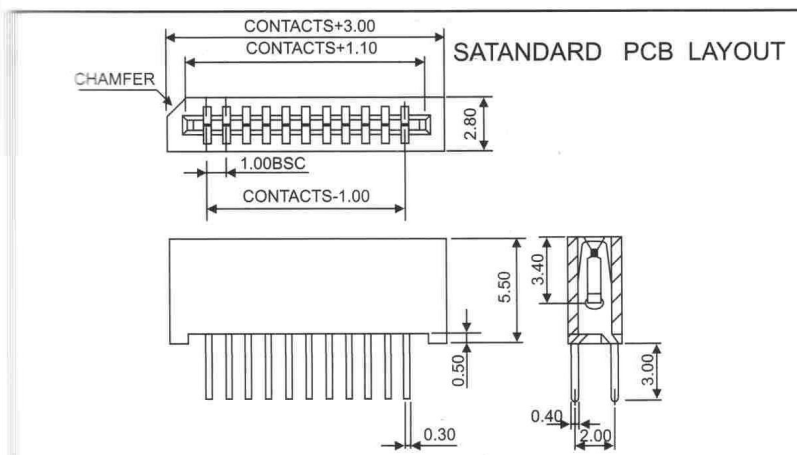

SIDE ENTRY TYPE

MATERIAL



HOUSING:THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOYS

FINISH




CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT:0.5A
OPERATING TEMPERATURE:-40°C TO 105°C
CONTACT RESISTANCE:30 MILLIOHMS MAX.
INSULATION RESISTANCE:1000 MEGAOHMS MIN.
DIELEDTRIC STRENGRH: 500V AC /MIN
No.of Contact:4~30

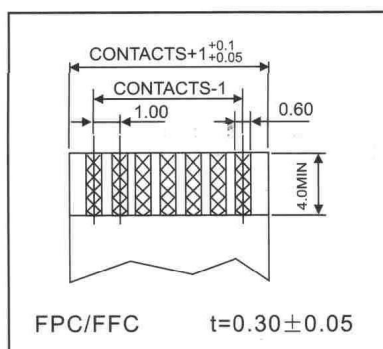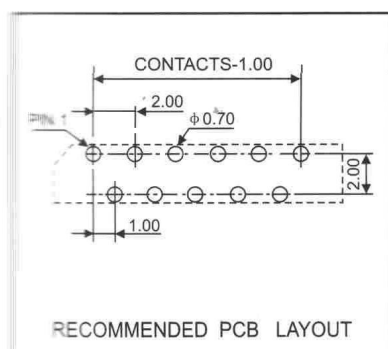




UNIT:mm

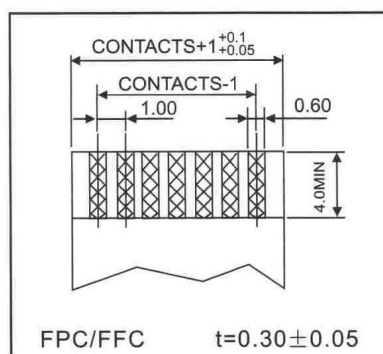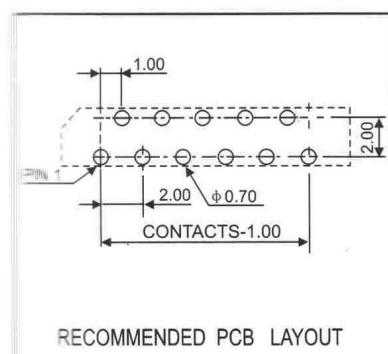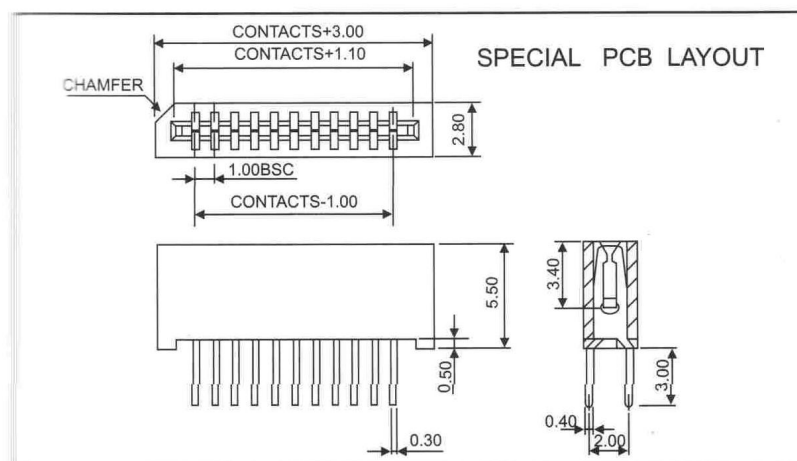

UNIT:mm

FPC/FFC CONNECTOR NON ZIF FOR DIP TYPE(1.00mm)

6310 Series

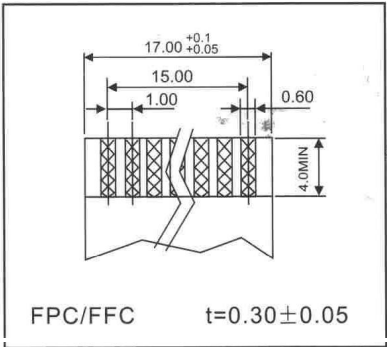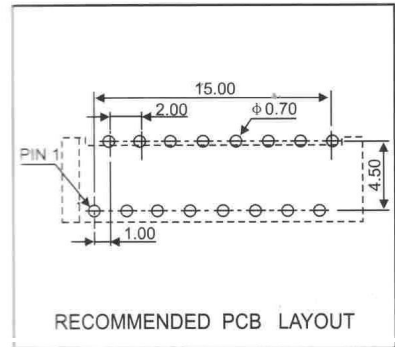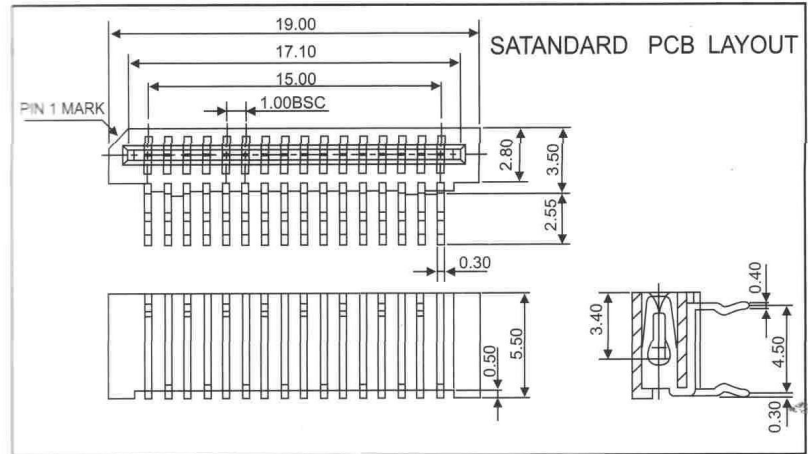




UNIT:mm

SIDE ENTRY TYPE


MATERIAL
HOUSING:THERMOPLASTIC UL94V-0.
CONTACT:COPPER ALLOYS

FINISH
CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION
CURRENT Rating : 0.5A
OPERATING TEMPERATURE:-40° C ~105° C
CONTACT RESISTANCE: 30mΩ max
INSULATION RESISTANCE:1000MΩ min
DIELEDTRIC STRENGTH:500V AC/ MIN
NO . OF CONTACTS:4~ 30

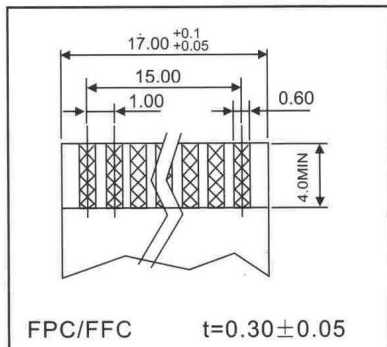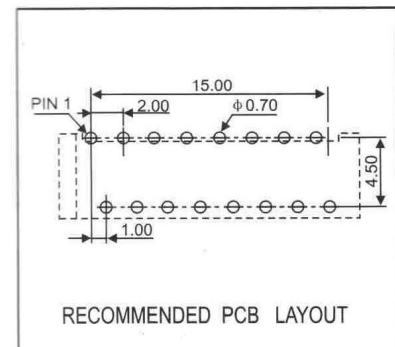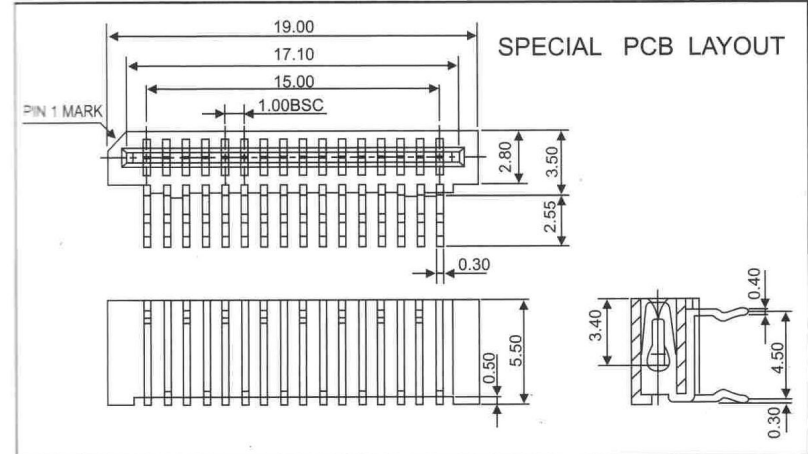

UNIT:mm

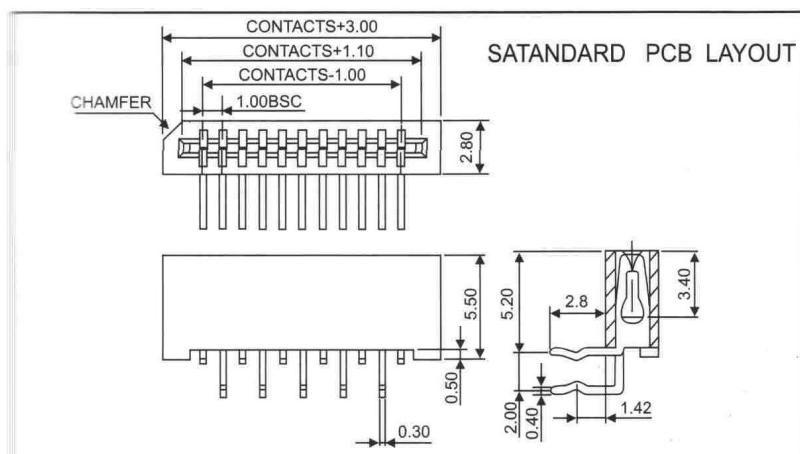

SIDE ENTRY TYPE

MATERIAL



HOUSING:THERMOPLASTIC UL94V-0
CONTACT:COPPER ALLOYS

FINISH




CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT Rating : 0.5A
OPERATING TEMPERATURE:-40°C ~105°C
CONTACT RESISTANCE:30mΩ max
INSULATION RESISTANCE:1000MΩ min
DIELEDTRIC STRENGTH:1000V AC/ MIN
NO . OF CONTACTS:4~ 30

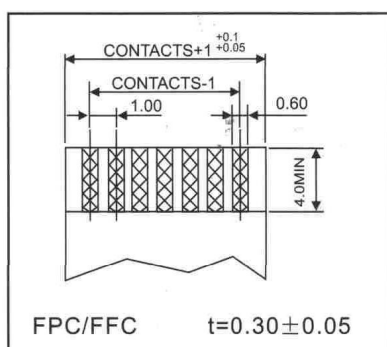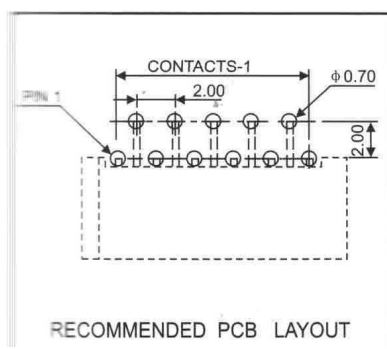

UNIT:mm

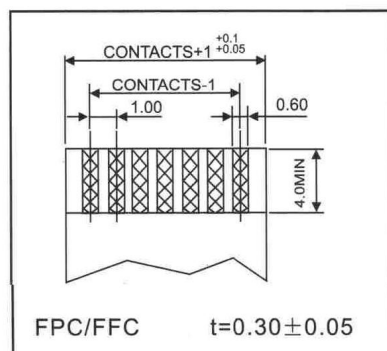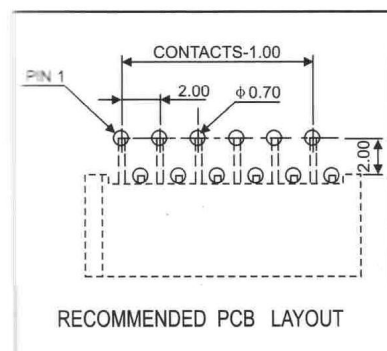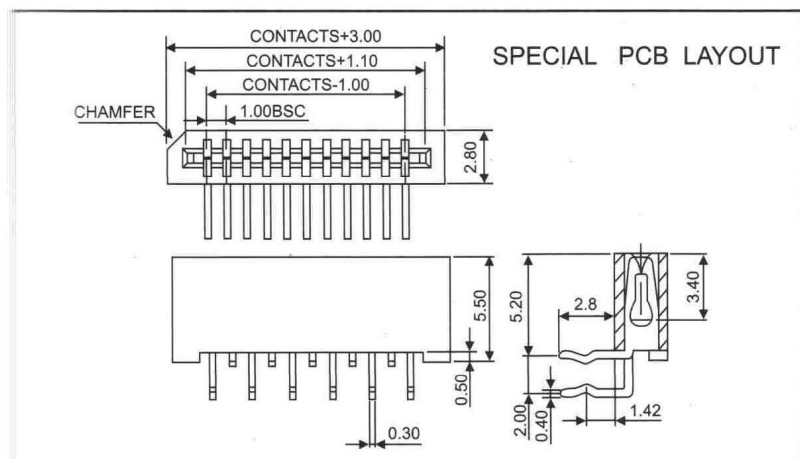

UNIT:mm