


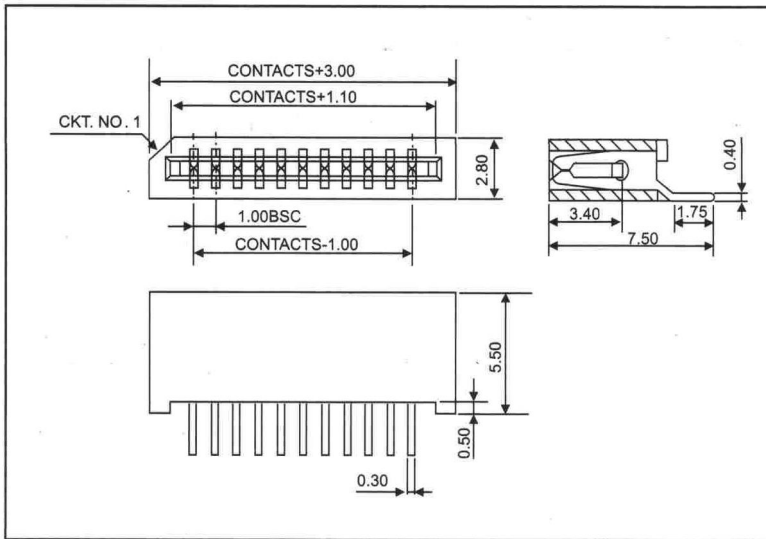

TOP ENTRY TYPE

MATERIAL



HOUSING: HIGH TEMPERATURE
THERMOPLASTIC UL94V-0
CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT Rating : $0.5A$
OPERATING TEMPERATURE: $-40^{\circ}C \sim 105^{\circ}C$
CONTACT RESISTANCE: $30m\Omega$ max
INSULATION RESISTANCE: $1000 M\Omega$ min
DIELECTRIC STRENGTH: $500V AC / MIN$
NO. OF CONTACTS: $4 \sim 30$

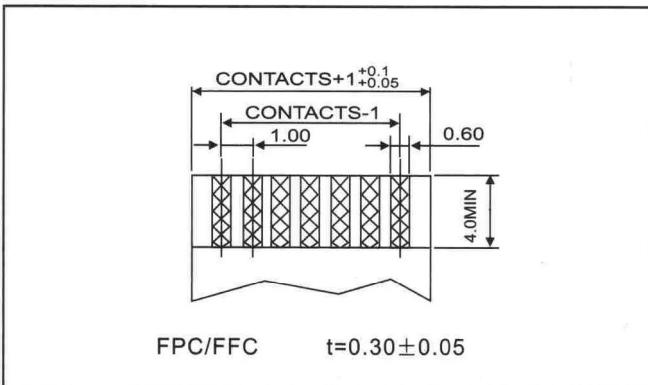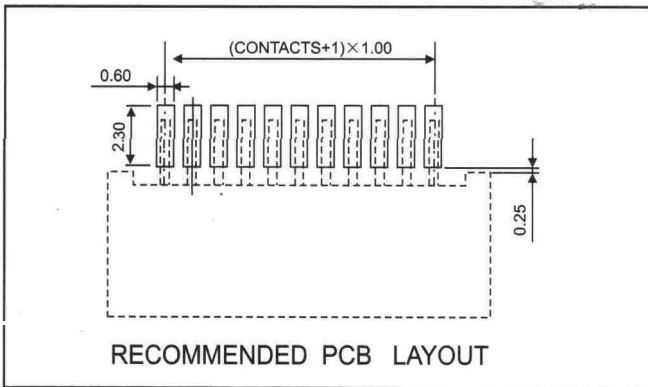

UNIT:mm