


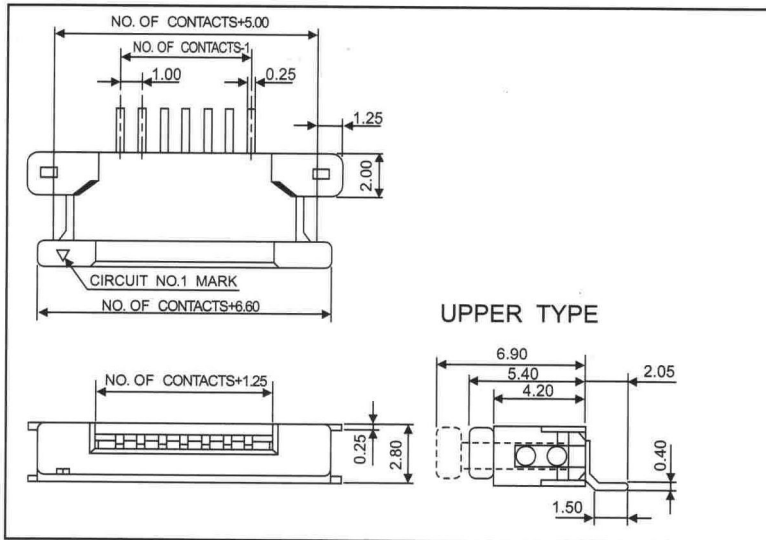

## UPPER CONTACT

### MATERIAL



HOUSING:HIGH TEMPERATURE  
THERMOPLASTIC UL94V-0  
ACTUATOR:HIGH TEMPERATURE  
THERMOPLASTIC UL94-0  
CONTACT:COPPER ALLOYS  
FITTING NAIL: COPPER ALLOYS

### FINISH


CONTACT:TIN PLATED OVER NICKEL  
FITTING NAIL:TIN PLATED OVER NICKEL

### SPECIFICATION

CURRENT Rating : 0.5A  
OPERATING TEMPERATURE:-40°C ~105°C  
CONTACT RESISTANCE: 30mΩ max  
INSULATION RESISTANCE:1000MΩ min  
DIELECTRIC STRENGTH: 500VAC/ MIN  
NO. OF CONTACTS:4~ 30

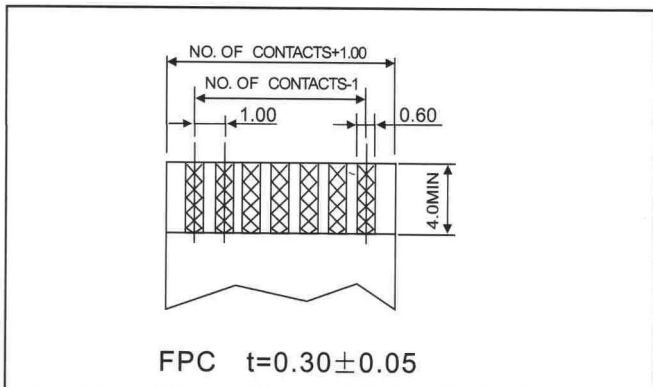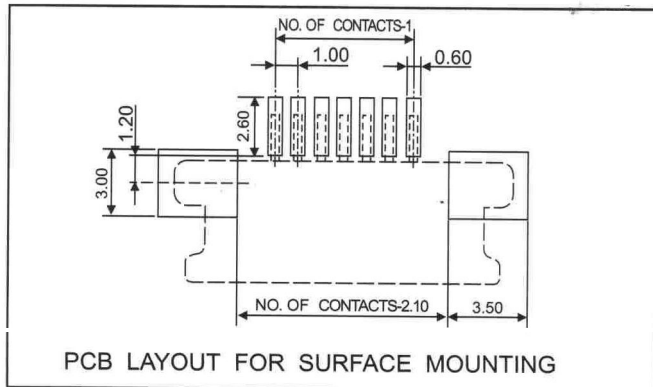

UNIT:mm

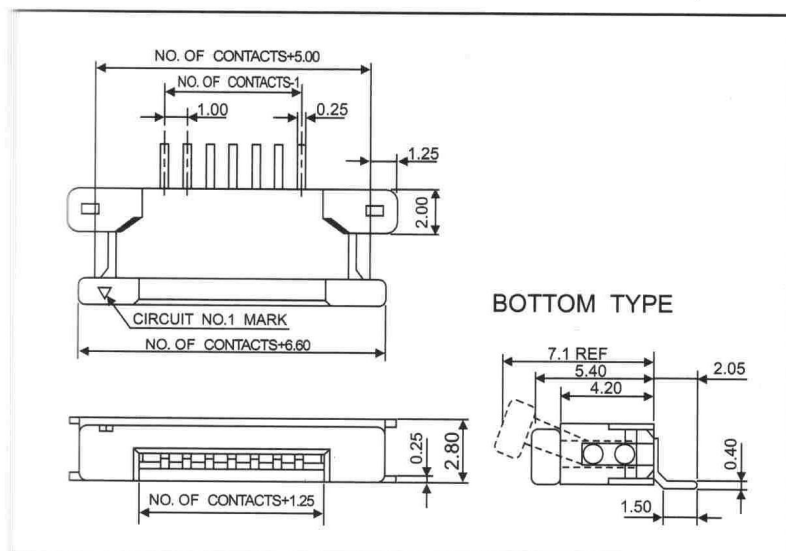

BOTTOM TYPE

## BOTTOM CONTACT

### MATERIAL


HOUSING:HIGH TEMPERATURE  
THERMOPLASTIC UL94V-0  
ACTUATOR:HIGH TEMPERATURE  
THERMOPLASTIC UL94-0  
CONTACT:COPPER ALLOYS  
FITTING NAIL: COPPER ALLOYS

### FINISH


CONTACT:TIN PLATED OVER NICKEL  
FITTING NAIL:TIN PLATED OVER NICKEL

### SPECIFICATION

CURRENT Rating : 0.5A  
OPERATING TEMPERATURE:-40°C ~105°C  
CONTACT RESISTANCE:30mΩ max  
INSULATION RESISTANCE:1000MΩ min  
DIELECTRIC STRENGTH: 500VAC/ MIN  
NO. OF CONTACTS:4~ 30

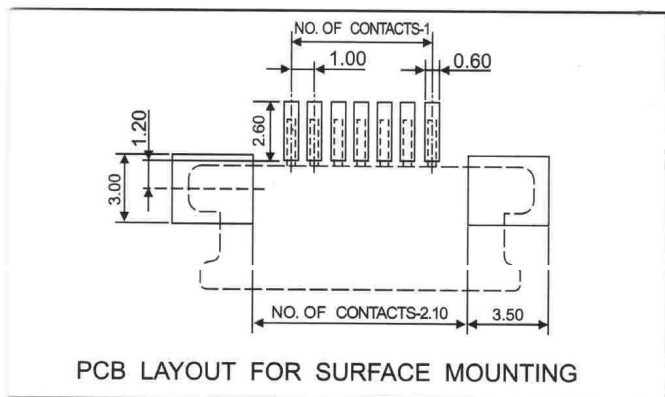

PCB LAYOUT FOR SURFACE MOUNTING

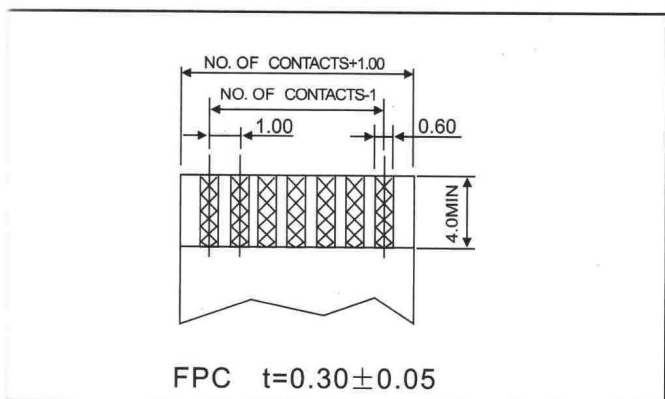

FPC  $t=0.30\pm0.05$

UNIT:mm