
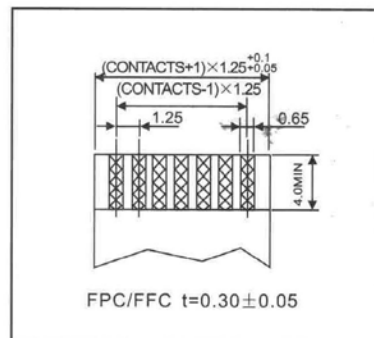
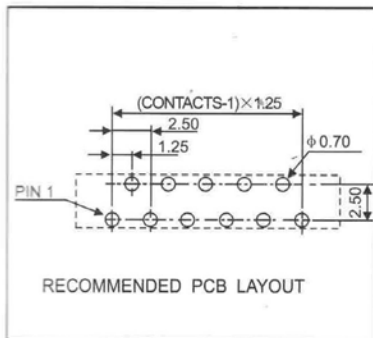


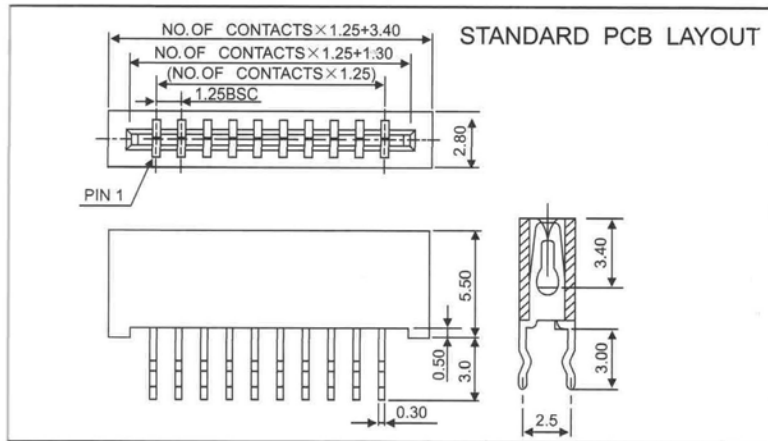

UNIT:mm

TOP ENTRY TYPE

MATERIAL

HOUSING:THERMOPLASTIC UL94V-0

CONTACT:COPPER ALLOYS

FINISH

CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CORRENT RATING:0.5A




OPERATING TEMPERATURE:-40°C TO 105°C

CONTACT RESISTANCE:25m Ω max

INSULATION RESISTANCE:1000M Ω min

DIELEDTRIC STRENGTH:AC . 500V /min

NO . OF CONTACTS:4~ 30

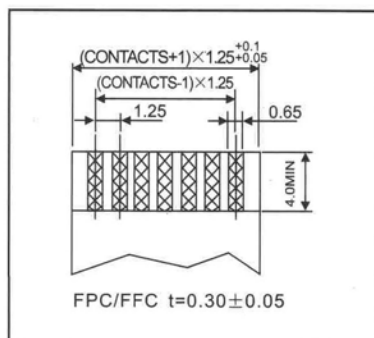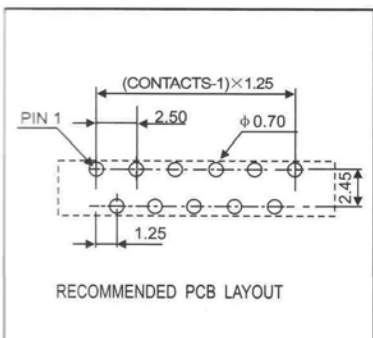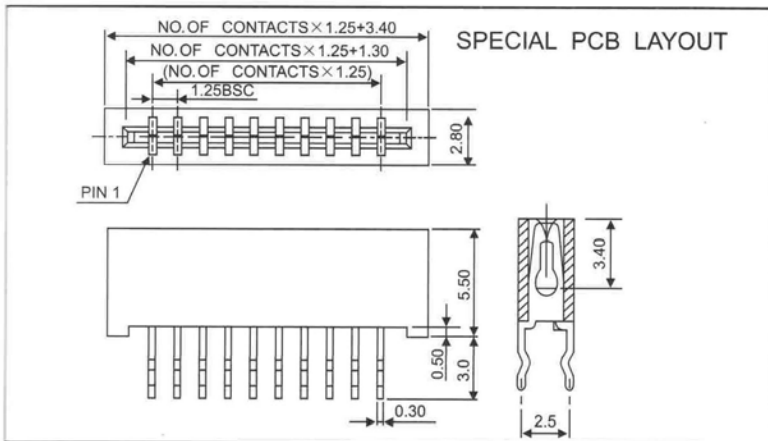

UNIT:mm

SIDE ENTRY TYPE

MATERIAL

HOUSING:THERMOPLASTIC UL94V-0

CONTACT:COPPER ALLOYS

FINISH

CONTACT:TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT:0.5A




OPERATING TEMPERATURE:-40°C TO 105°C

CONTACT RESISTANCE:30mΩ max




INSULATION RESISTANCE:1000MΩ min

DIELECTRIC STRENGTH:500 VAC/MIN.


NO. OF CONTACTS:4~ 30

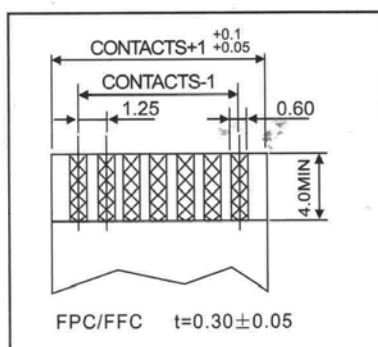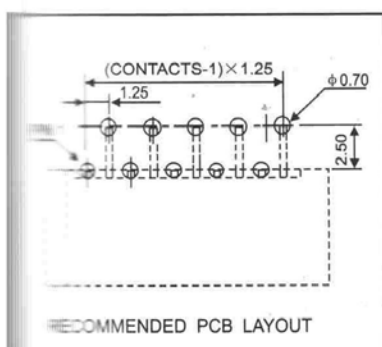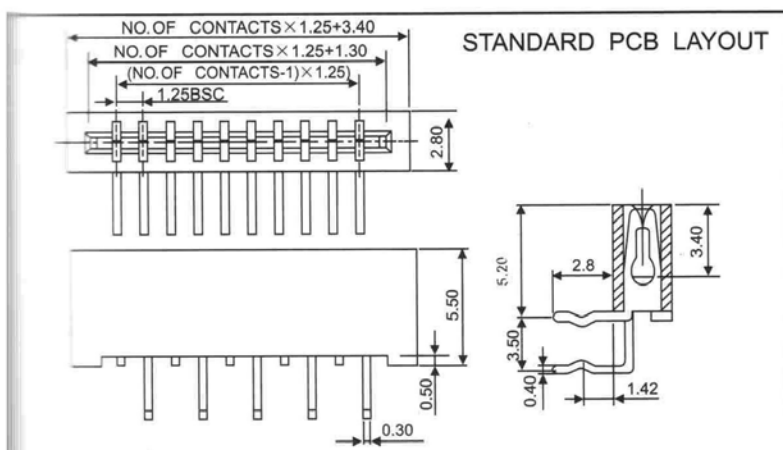

UNIT:mm

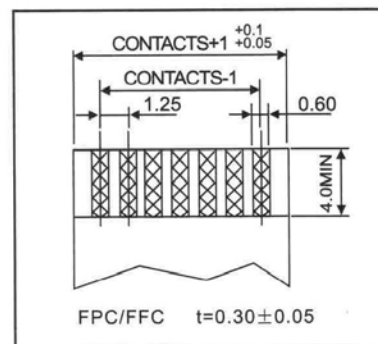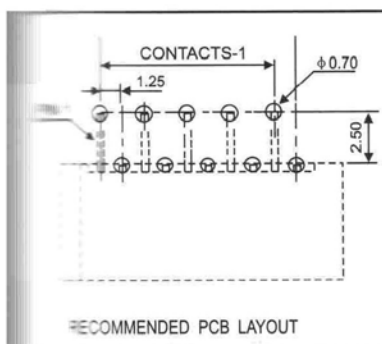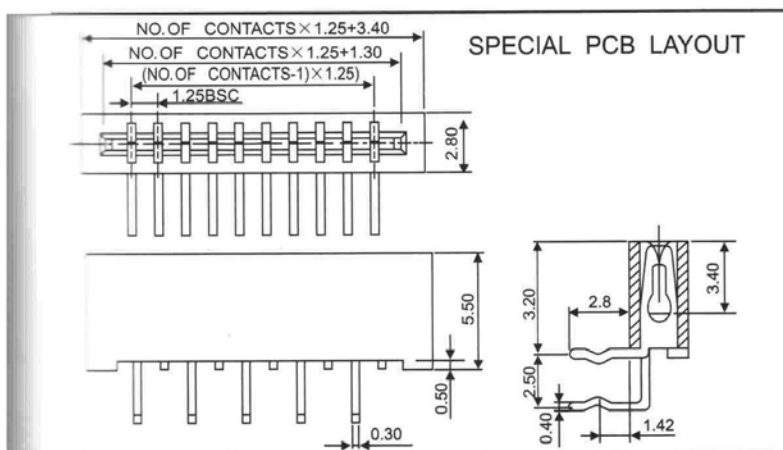

UNIT:mm

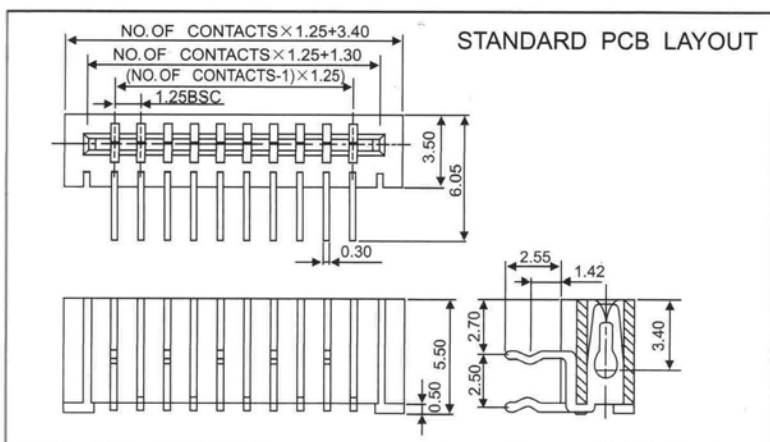

SIDE ENTRY INWARD TYPE

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0

CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT: 0.5A



OPERATING TEMPERATURE: -40°C TO 105°C

CONTACT RESISTANCE: 30mΩ max




INSULATION RESISTANCE: 1000MΩ min

DIELECTRIC STRENGTH: 500VAC/ MIN

NO. OF CONTACTS: 4 ~ 30

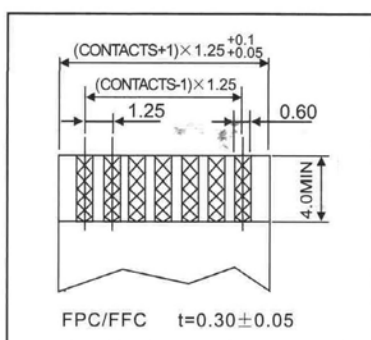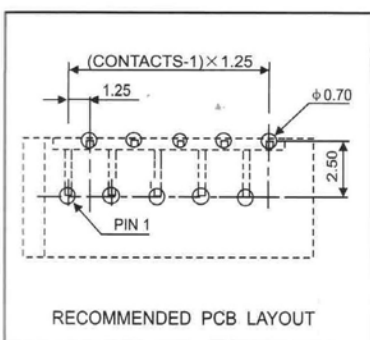

UNIT: mm

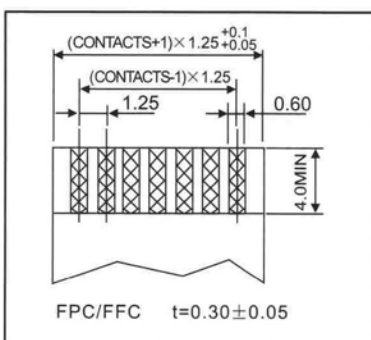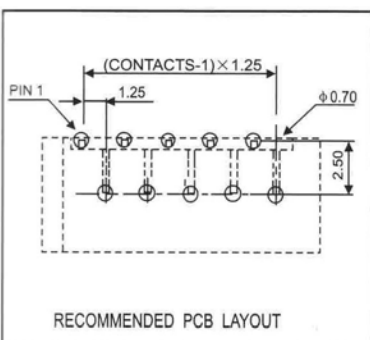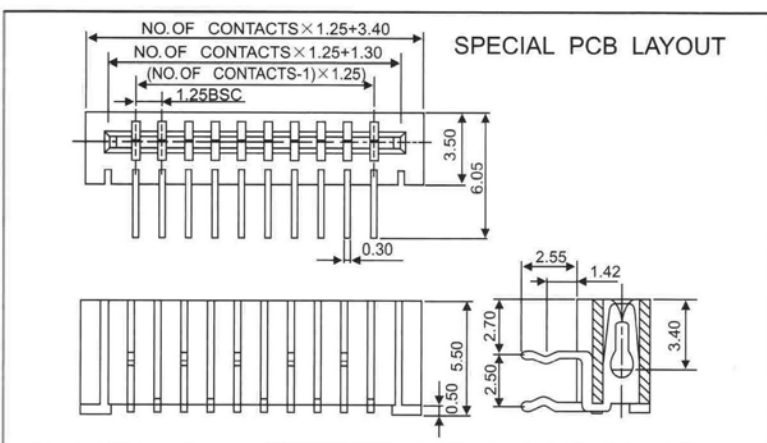

UNIT: mm