


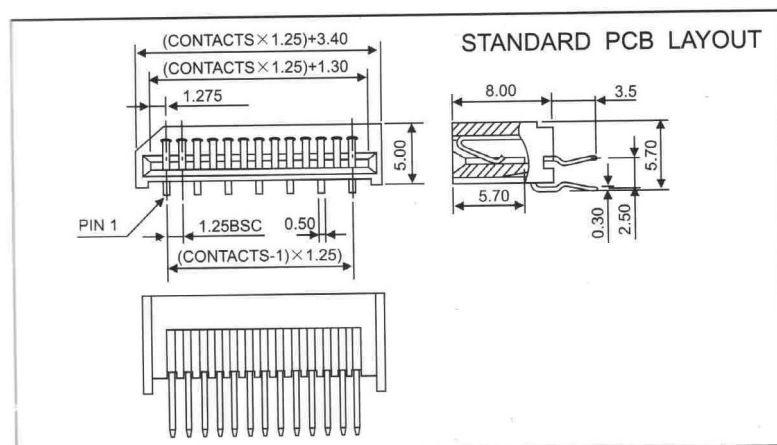

TOP ENTRY TYPE

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0

CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN/LEAD PLATED OVER NICKEL

SPECIFICATION



CURRENT: 1A

OPERATING TEMPERATURE: -40°C TO 105°C




CONTACT RESISTANCE: 25mΩ max

INSULATION RESISTANCE: 5000MΩ min


NO. OF CONTACTS: 4 ~ 36

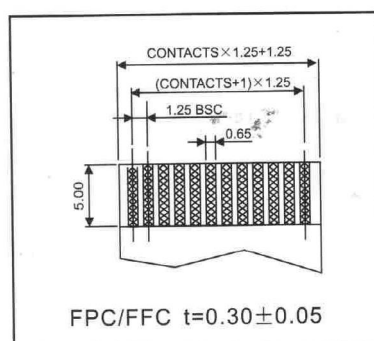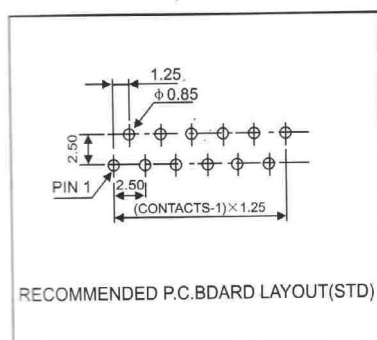

UNIT:mm

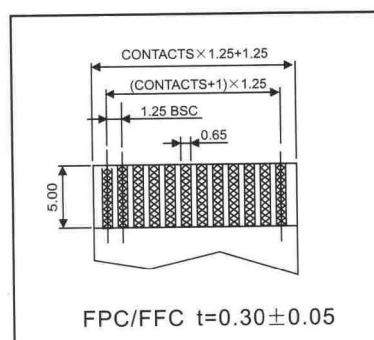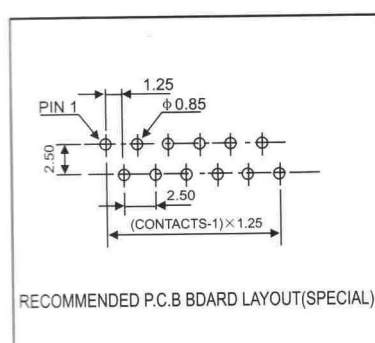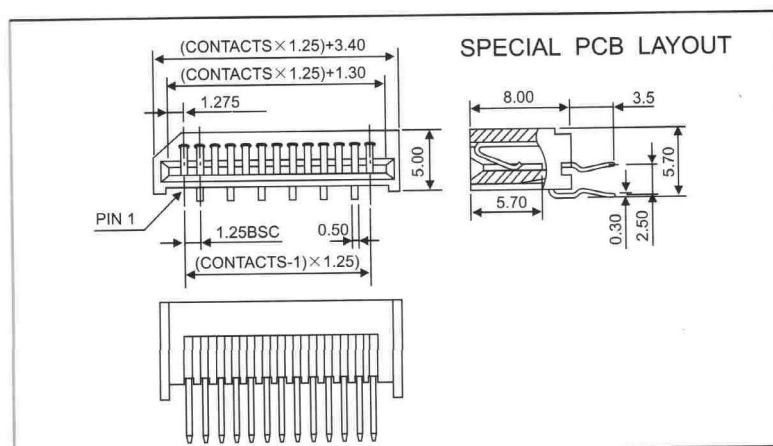

UNIT:mm

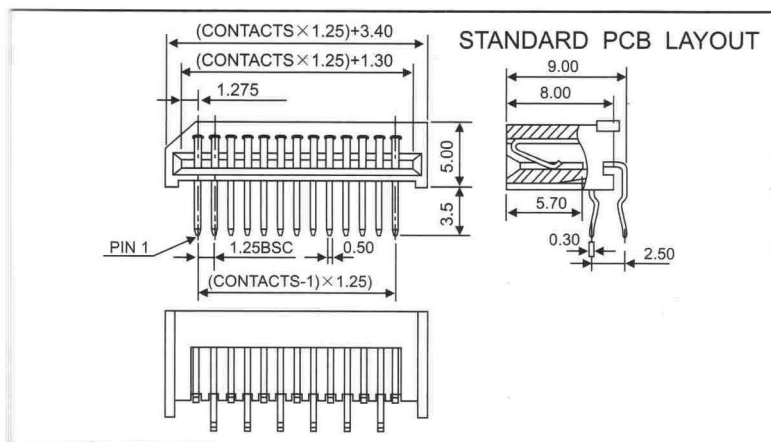

SIDE ENTRY TYPE

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0

CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT: 0.5A



OPERATING TEMPERATURE: -40°C TO 105°C

CONTACT RESISTANCE: 25mΩ max




INSULATION RESISTANCE: 5000MΩ min

DIELECTRIC STRENGTH: AC 200V/min

NO. OF CONTACTS: 4 ~ 36

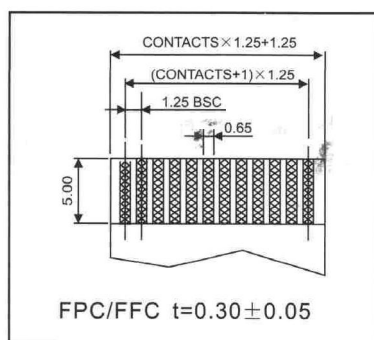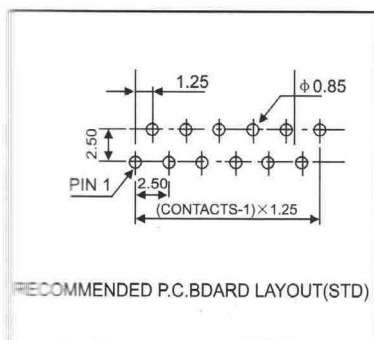

UNIT:mm

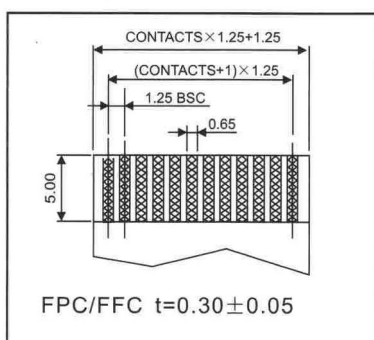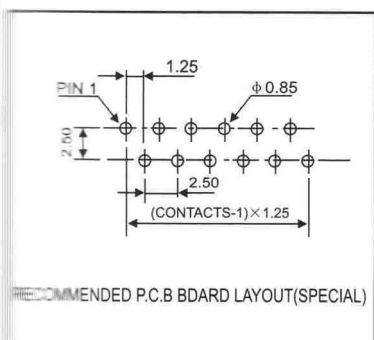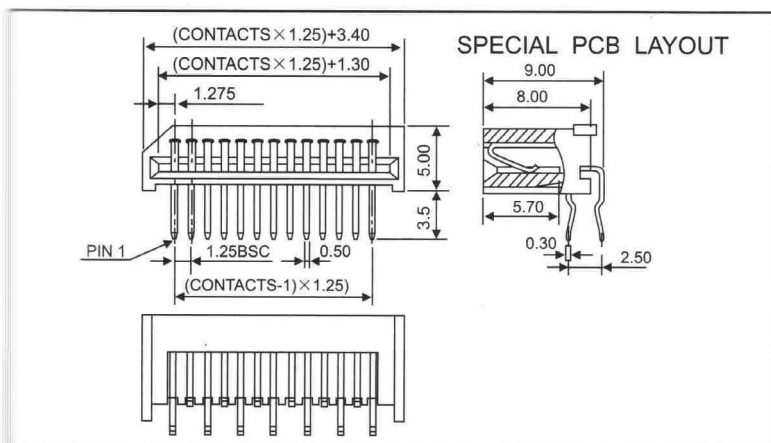

UNIT:mm