


SIDE ENTRY

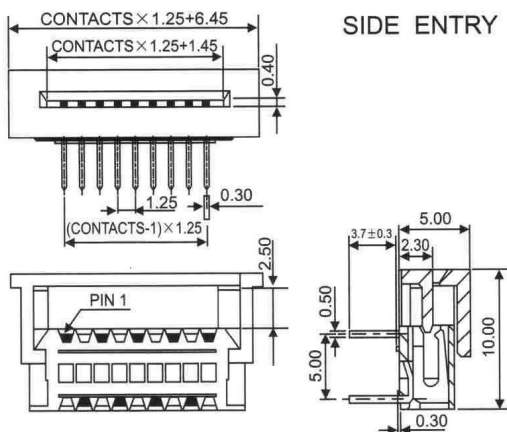

SIDE ENTRY INWARD TYPE

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0

CONTACT: COPPER ALLOYS

FINISH

CONTACT: TIN/LEAD PLATED OVER NICKEL

SPECIFICATION

CURRENT Rating : 0.5A


OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

CONTACT RESISTANCE: $30\text{m}\Omega$ max


INSULATION RESISTANCE: $1000\text{M}\Omega$ min

DIELECTRIC STRENGTH: 500VAC/ MIN

NO. OF CONTACTS: 4 ~ 30

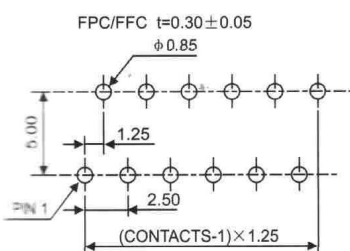



RECOMMENDED P.C. BOARD LAYOUT

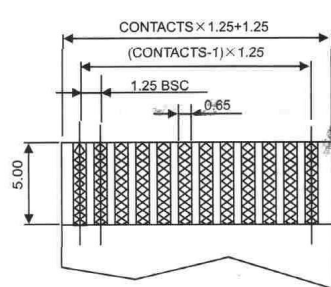


FPC/FFC $t = 0.30 \pm 0.05$

UNIT:mm

TOP ENTRY

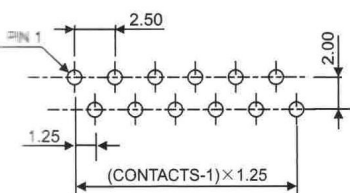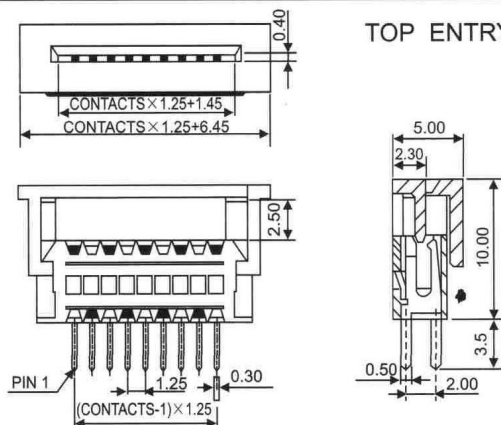

RECOMMENDED P.C. BOARD LAYOUT



FPC/FFC $t = 0.30 \pm 0.05$

UNIT:mm