

CARD EDGE CONNECTOR (2.54mm)

801 Series


Material

Insulator:P.B.T.+30% Glass Fiber(UL94V-0)
Contact:Phosphor Bronze or Brass
Contact Plated:Gold over Nickel or Tin


Specification

Current Rating:1A
Insulation Resistance:1000M Ω Min.at 500V DC
Dielectric Withstanding Voltage: AC 500V / Min
Operating Temperature:-55°C~+105°C
Contact Resistance:15m Ω Max.





Dimension: $\frac{\text{Inch}}{\text{mm}}$

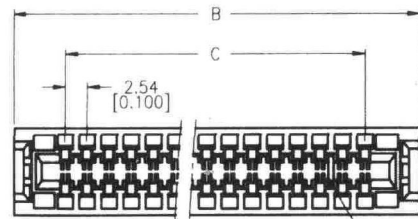

Polarizing Key Plug



Polarizing Key

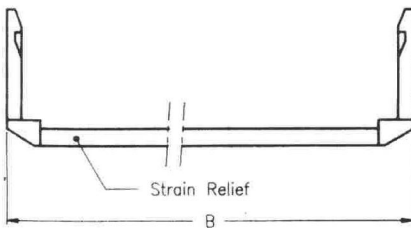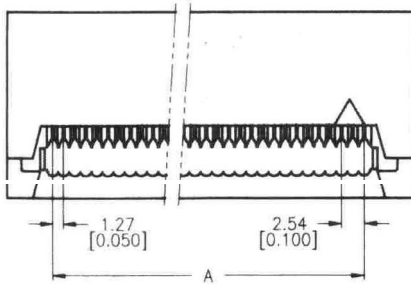

No. Of Contacts	Dim. A	Dim. B	Dim. C
10	11.43 [0.450]	22.20 [0.874]	10.16 [0.400]
14	16.51 [0.650]	27.30 [1.075]	15.24 [0.600]
16	19.05 [0.750]	29.80 [1.173]	17.78 [0.700]
20	24.13 [0.950]	34.90 [1.374]	22.86 [0.900]
26	31.75 [1.250]	42.50 [1.673]	30.48 [1.200]
34	41.91 [1.650]	52.70 [2.075]	40.64 [1.600]
40	49.53 [1.950]	60.20 [2.370]	48.26 [1.900]
44	54.61 [2.150]	65.40 [2.575]	53.34 [2.100]
50	62.23 [2.450]	73.00 [2.874]	60.96 [2.400]
56	69.85 [2.750]	80.40 [3.165]	68.58 [2.700]
60	74.93 [2.950]	85.60 [3.370]	73.66 [2.900]
62	77.47 [3.050]	89.00 [3.504]	76.20 [3.000]
64	80.01 [3.150]	90.68 [3.570]	78.74 [3.100]

Order Information

801	10	P	S	A	A	3
1	2	3	4	5	6	7

1.SERIES NO .

801

2.CONTACT NUMBER

10 14 16 20 26 34
40 44 50 56 60 62 64

3.CONTACT TYPE

P=NON DISTRIBUTION

4.CONTACT PLATING

S=SELECTIVE GOLD
G=GOLD FLASH
C=15 μ " GOLD
D=30 μ " GOLD

5.PARTS OPTION

A=W/O STRAIN RELIEF
B=W/STRAIN RELIEF

6.BODY OPTION

A=W/O KEY
B=W/KEY

7.INSULATOR

3=BLACK
4=GREY