


D - SUB CONNECTOR SERIES

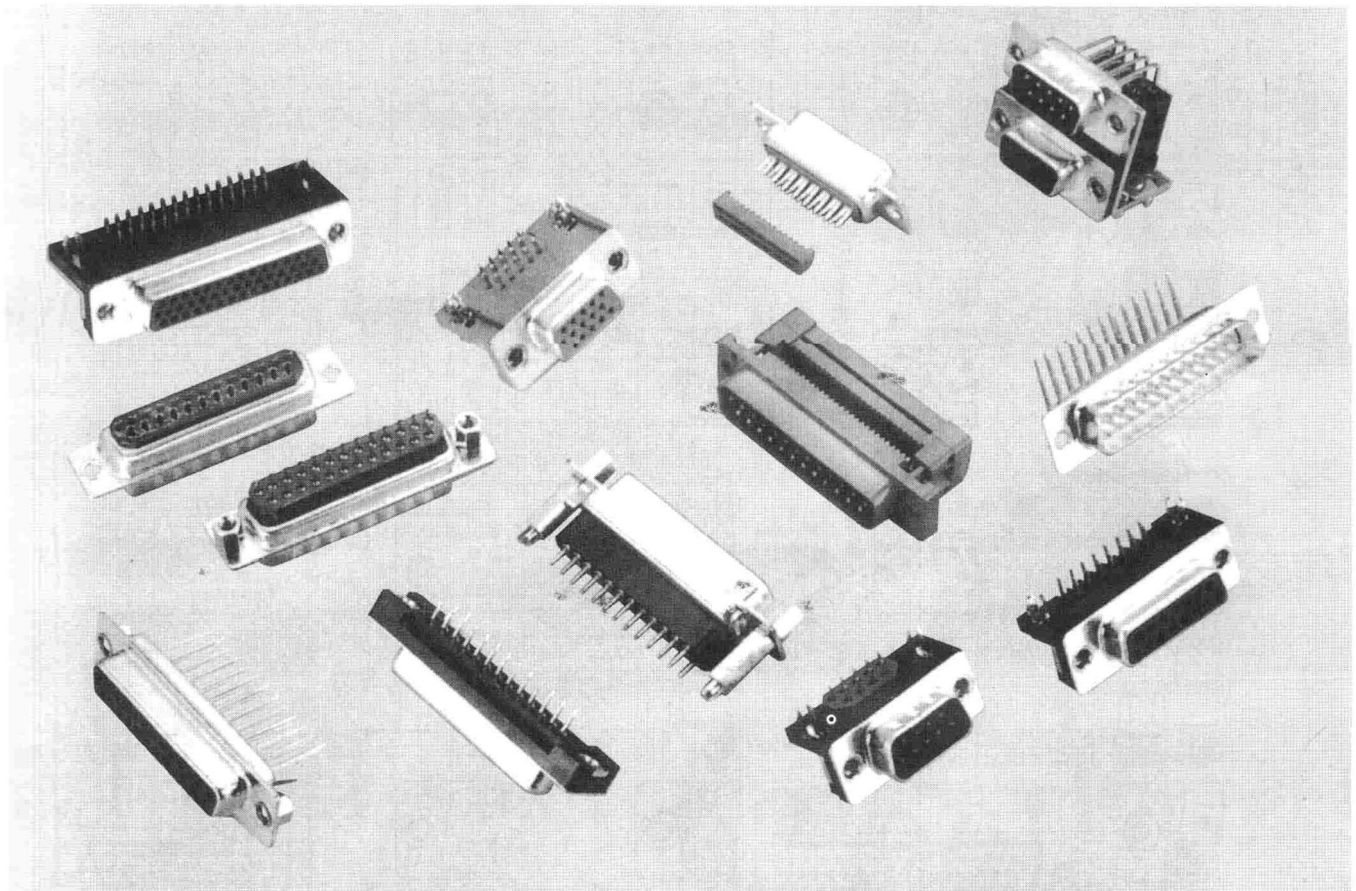


MATERIAL & FINISHES

- INSULATOR - PBT GLASS FILLED
NYLON-66(D-SUB CRIMP HOUSING)
NYLON-6T(D-SUB PCB SMT for NOTEBOOK)
UL 94V-0
- CONTACT - BRASS(MALE)
BRASS OR PHOSPHOR BRONZE(FEMALE)
- SHELL - STEEL
- PLATING - CONTACT
 - 1.GOLD FLASH(COMplete)
 - 2.SELECTIVE GOLD OVER NICKEL PLATED*CONTACT AREA)
 - TIN/LEAD OVER NICKEL PLATED(TAIL AREA)
- SHELL
TIN OR ZINC OVER COPPER PLATED

ELECTRICAL CHARACTERISTICS


- CURRENT RATING :3A
- CONTACT RESISTANCE :<15m Ω
:<25m Ω (D-SUB DUAL PORT)
- INSULATION RESISTANCE :<3000M Ω AC 500V
- DIELECTRIC VOLTAGE :<1000V /MIN
500V /MIN (D- SUB PCB SMT FOR NOTEBOOK)
- OPERATING TEMPERATURE: -50°C ~ + 105°C

SPECIAL OPTIONED (Clinched nuts)

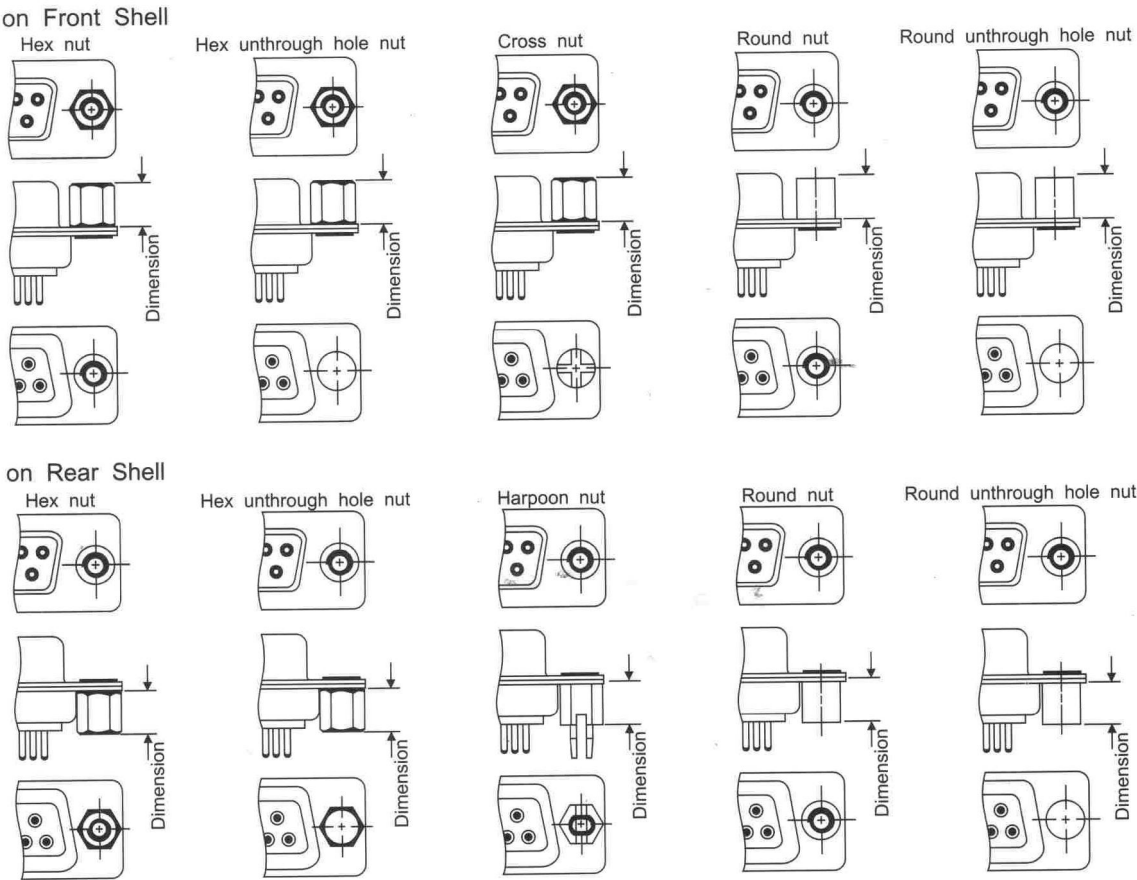


SPECIAL OPTIONED (FERRITE TYPES)


DM

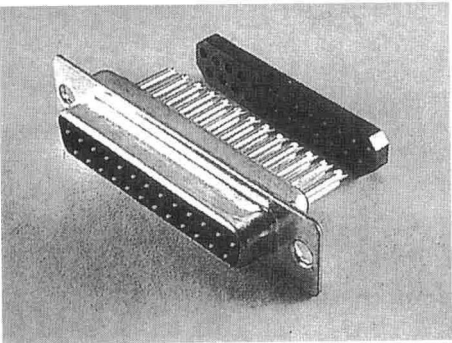

DMR

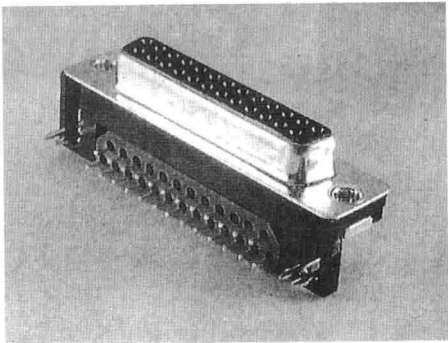

DMRH

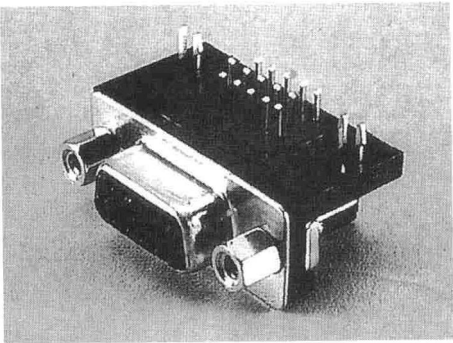

DSH

