



D - SUB CRIMP CONNECTOR

DCH Series


Dimension: $\frac{\text{mm}}{\text{Inch}}$

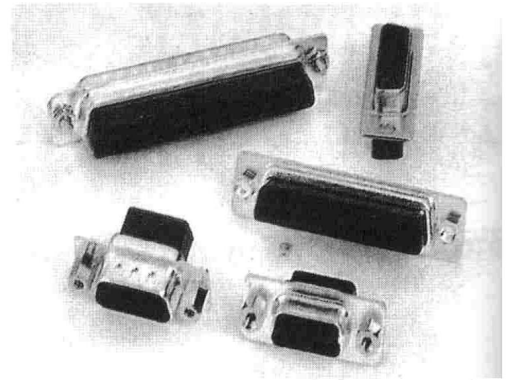

MALE

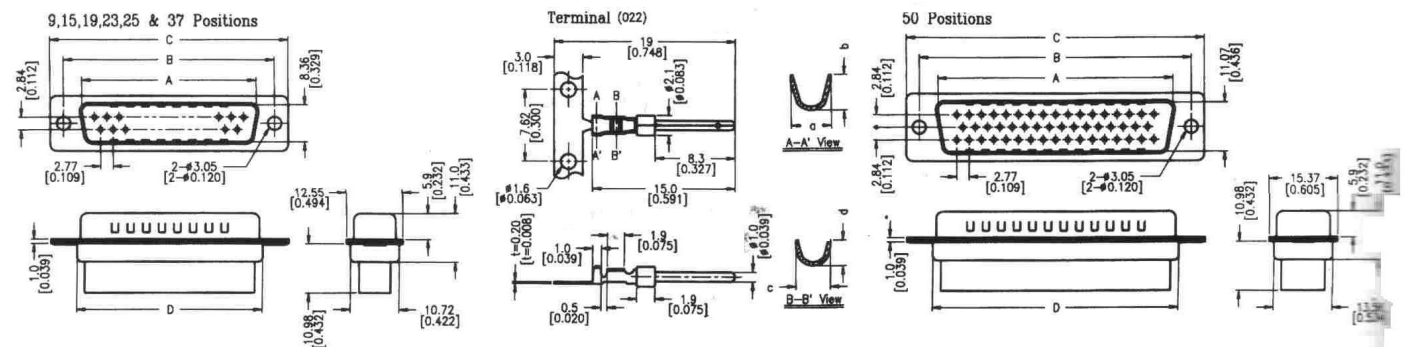

FEMALE

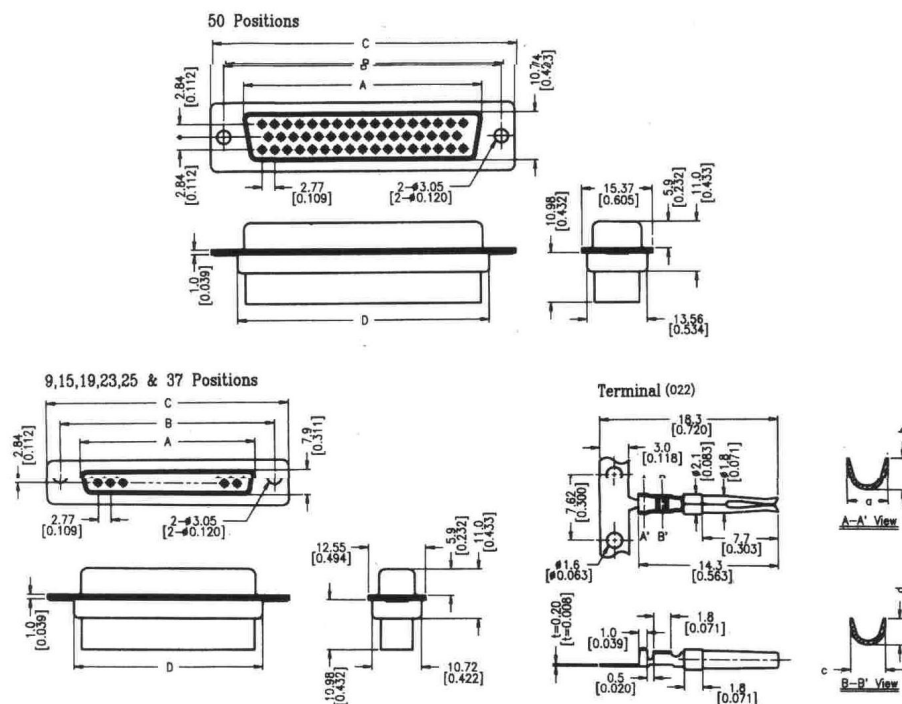


No. Of Contacts	Dim. A Male	Dim. A Female	Dim. B	Dim. C	Dim. D
9	16.92 [0.666]	16.33 [0.643]	24.99 [0.984]	30.81 [1.213]	19.28 [0.759]
15	25.25 [0.994]	24.66 [0.971]	33.32 [1.312]	39.14 [1.541]	27.51 [1.083]
19	30.75 [1.211]	30.00 [1.181]	38.94 [1.533]	44.94 [1.769]	32.86 [1.294]
23	30.75 [1.211]	35.30 [1.390]	38.94 [1.533]	44.94 [1.769]	32.86 [1.294]
25	38.96 [1.534]	38.38 [1.511]	47.04 [1.852]	53.04 [2.088]	41.30 [1.626]
37	55.42 [2.182]	54.84 [2.159]	63.50 [2.500]	69.32 [2.729]	57.71 [2.272]
50	52.8 [2.079]	52.43 [2.064]	61.11 [2.406]	66.93 [2.635]	55.32 [2.178]

Contacts No.	Wire AWG	Dim. A	Dim. B	Dim. C	Dim. D
1	20-24	2.8 [0.110]	2.7 [0.106]	2.3 [0.091]	2.1 [0.083]
2	24-28	2.1 [0.083]	1.9 [0.075]	1.8 [0.071]	1.36 [0.054]
3	28-32	2.3 [0.091]	1.7 [0.067]	2.1 [0.083]	1.6 [0.063]


D - SUB CRIMP CONNECTOR

DCH Series


PROCESS OPTION



FRONT RIVET



REAR RIVET

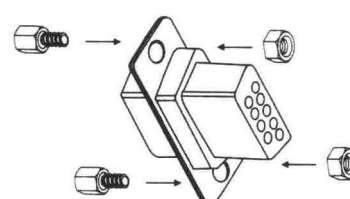

HEX SCREW + HEX NUT

Order Information

DCH	15	P	P	A	A	3
1	2	3	4	5	6	7

1.SERIES NO.
DCH

2.CONTACT NUMBER
09 15 25 37 50

3.CONTACT TYPE
P=MALE
S=FEMALE

4.SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

5.PROCESS
A=THRU.HOLE
B=HEX-SCREW+1.5mm NUT
C=3.8mm OPEN HEX RIVET
D=5.8mm OPEN HEX RIVET
K=2.5MM OPEN HEX RIVET

6.PARTS OPTION
A=NON ACCESSORIES
B=FRONT RIVET
E=REAR RIVET
F=REAR RIVET+LOOSE SCREWS
G=REAR RIVET+FIXED SCREWS

7.INSULATOR COLOR
3=BLACK

Order Information:Terminal

DCHT	P	S	B	A
1	2	3	4	5

1.SERIES NO.
DCHT

2.CONTACT TYPE
P=MALE
S=FEMALE

3.CONTACT PLATING

S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD

4.WIRE OPTION
B=SUITABLE FOR 24~26AWG

5.MATERIAL
A=BRASS(MALE)
B=PHOSPHOR BRONZE
(FEMALE)