



DCHH Series

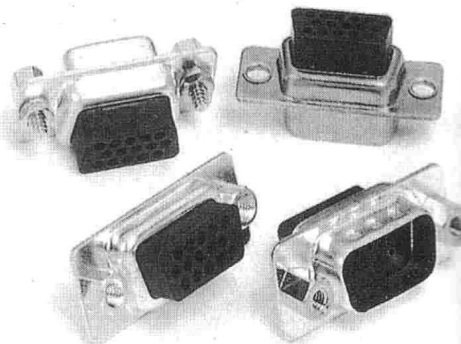


Dimension: $\frac{\text{mm}}{\text{Inch}}$


15,26,44 & 62 Positions

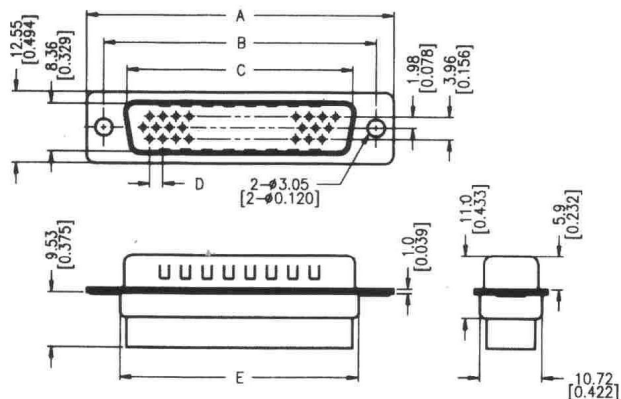



15,26,44 & 62 Positions

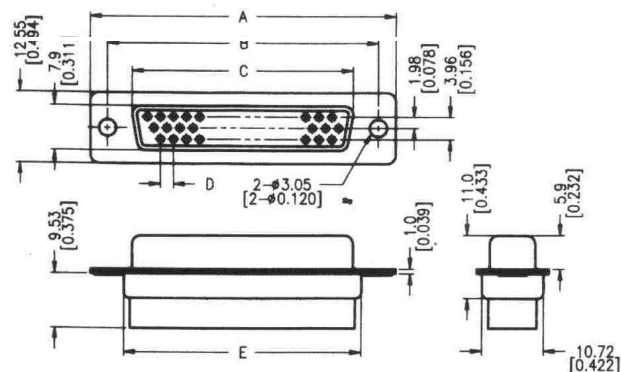


78 Positions

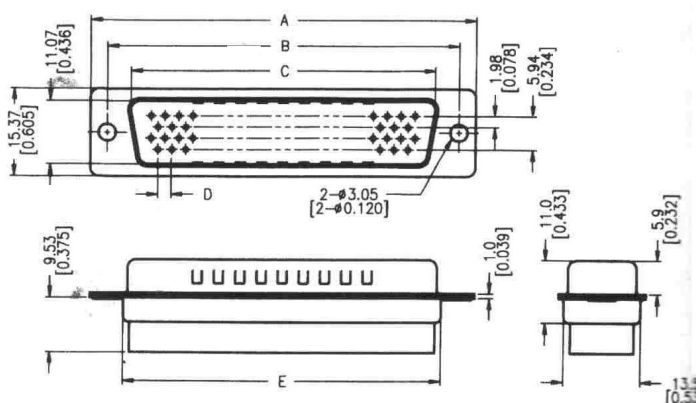

78 Positions

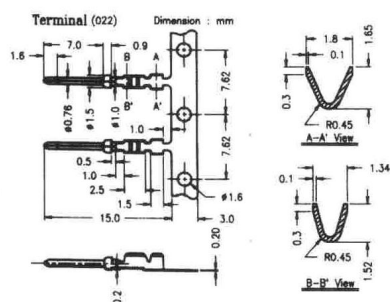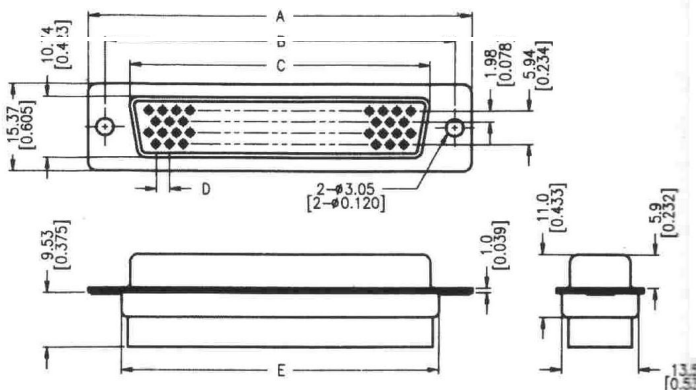


No. Of Contacts	Dim. A	Dim. B	Dim. C Female	Dim. C Male	Dim. D	Dim. E
15	30.81 [1.213]	24.99 [0.984]	16.33 [0.643]	16.92 [0.666]	2.29 [0.090]	19.28 [0.759]
26	39.14 [1.541]	33.32 [1.312]	24.66 [0.971]	25.25 [0.994]	2.29 [0.090]	27.51 [1.083]
44	53.04 [2.088]	47.04 [1.852]	38.38 [1.511]	38.96 [1.534]	2.29 [0.090]	41.30 [1.626]
62	69.32 [2.729]	63.50 [2.500]	54.84 [2.159]	55.42 [2.182]	2.41 [0.095]	57.71 [2.272]
78	66.93 [2.635]	61.11 [2.406]	52.43 [2.064]	53.03 [2.088]	2.41 [0.095]	55.32 [2.178]

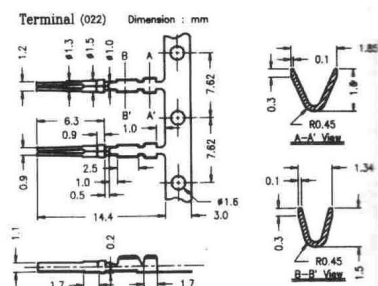


HIGH DENSITY D - SUB CRIMP CONNECTOR

DCHH Series


PROCESS OPTION



FRONT RIVET



REAR RIVET

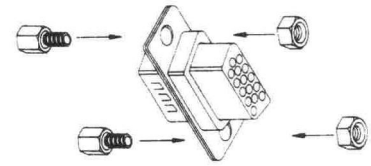

HEX SCREW + HEX NUT

Order Information:Housing

DCHH	15	P	P	A	A	3
1	2	3	4	5	6	7

1.SERIES NO .
DCHH

2.CONTACT NUMBER
15 26 44 62 78

3.CONTACT TYPE
P=MALE
(PLASTIC CLIP 15P ONLY)
A=MALE(METAL CLIP)
S=FEMALE
(METAL CLIP)

4.SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC(CHROMATIC)
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

5.PROCESS OPTION
A=THRU-HOLE
B=HEX-SCREW+1.5mm NUT
C=3.8mm OPEN HEX RIVET
D=5.8mm OPEN HEX RIVET
K=2.5mm OPEN HEX RIVET

6.PARTS OPTION
A=NON ACCESSORIES
B=FRONT RIVET
E=REAR RIVET
F=REAR RIVET+LOOSE SCREWS
G=REAR RIVET+FIXED SCREWS

7.INSULATOR COLOR
3=BLACK

Order Information:Terminal

DCHHT	P	S	A	A
1	2	3	4	5

1.SERIES NO .
DCHHT

2.CONTACT TYPE
P=MALE(PLASTIC CLIP)
A=MALE(METAL CLIP)
S=FEMALE(METAL CLIP)

3.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD

4.WIRE OPTION
B=SUITABLE FOR 26~30 AWG

5.MATERIAL
A=BRASS(MALE)
B=PHOSPHOR BRONZE
(FEMALE)