


D-SUB IDC FOR FLAT RIBBON CABLE



DML Series

POSITION	A	B	C
9S	16.30	25.00	30.80
15S	24.60	33.30	39.3
25S	38.30	47.10	53.1
37S	54.80	63.50	69.4

POSITION	A	B	C
9P	16.92	25.00	30.80
15 P	25.25	33.30	39.20
25 P	38.96	47.10	53.1
37 P	55.42	63.50	69.4


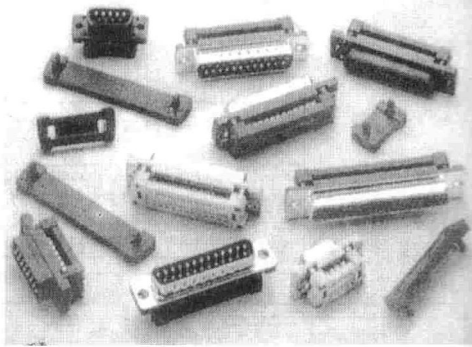


FEMALE

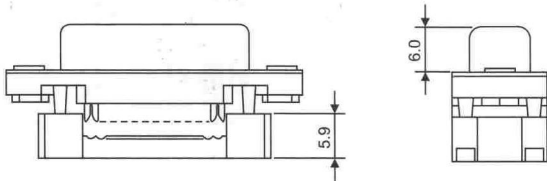
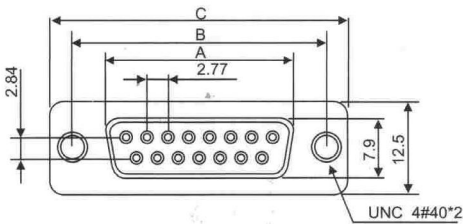


FEMALE



MALE

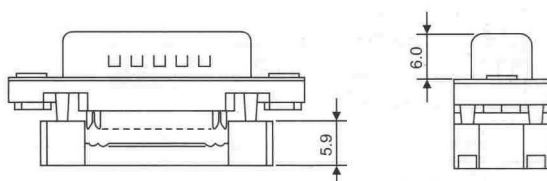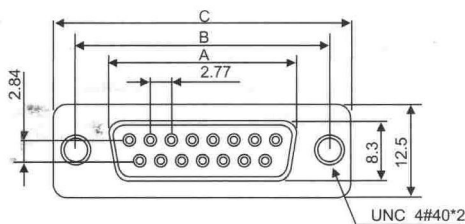

MALE

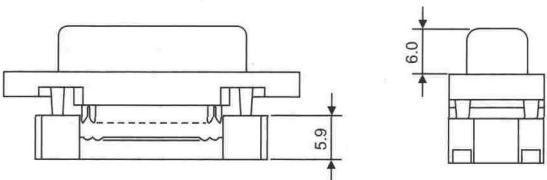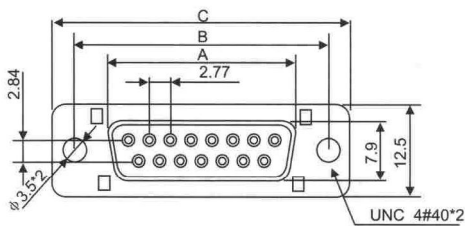

FEMALE FOR PLASTIC

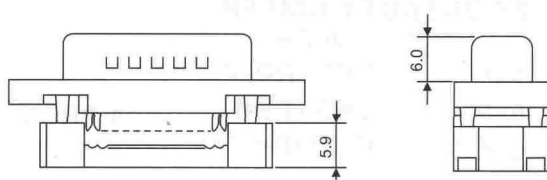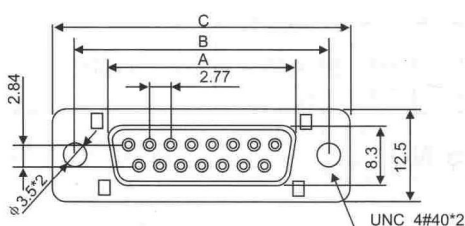


MALE FOR PLASTIC

Unit:mm



D-SUB IDC FOR FLAT RIBBON CABLE

DML Series


PROCESS OPTION

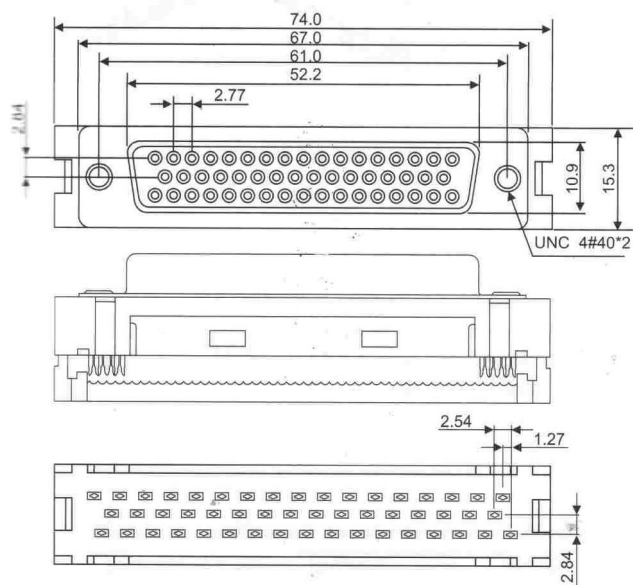

50 POSITION FEMALE



NON-THREAD RIVET



THREAD RIVET

unit:mm

Order Information

DML	A	15	P	G	A	A	A	2
1	2	3	4	5	6	7	8	9

1.SERIES NO .

DML

2.TYPE

A=STANDARD

3.CONTACT NUMBER

09 15 25 37 50

4.CONTAC TYPE

P=MALE

S=FEMALE

5. CONTACT PLATING

S=SELECTIVE GOLD

G=GOLD FLASH

A=5 μ " GOLD

B=10 μ " GOLD

C=15 μ " GOLD

D=30 μ " GOLD

6.SHELL TYPE

A=PLASTIC SHELL

B=METAL SHELL

C=METAL W/RIVET

(M3 THREAD)

D=METAL W/RIVET

(4#40 THREAD)

7.S.R. OPTION

A=W/O STRAIN RELIEF

B=W/STRAIN RELIEF

8.PROCESS OPTION

A=NON ACCESSORIES

B=LOOSE SCREWS

(4.8*11.8mm)

C=FIXED SCREWS

(4.8*11.8mm)

D=LOOSE SCREWS

(5.8*12.0mm)

E=FIXED SCREWS

(5.8*12.0mm)

9.INSULATOR COLOR

2=BLUE

3=BLACK

4=GREY