


D-SUB RIGHT ANGLE PCB CONNECTOR


DMRHS Series

Dimension: $\frac{\text{mm}}{\text{Inch}}$

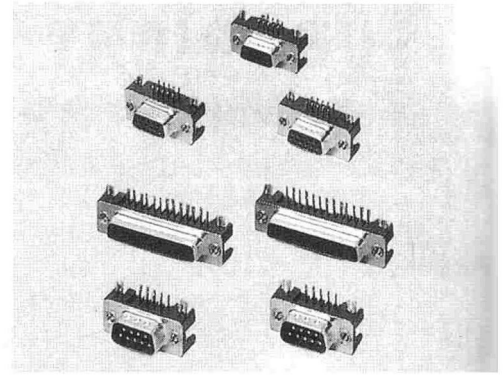


FEMALE

15S (3 Row)

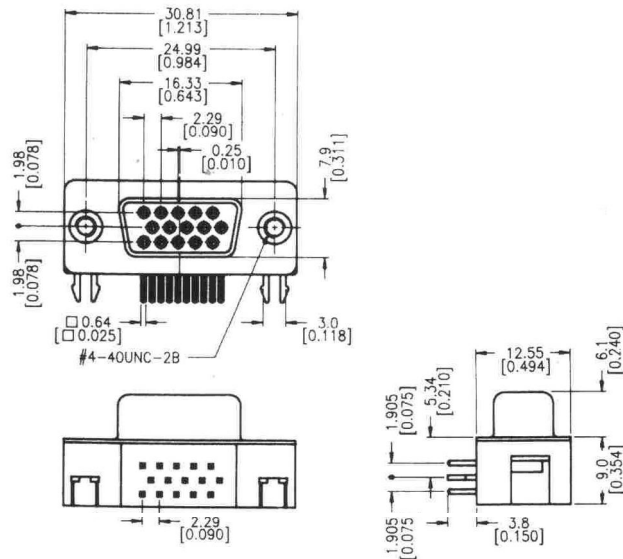


MALE

9P

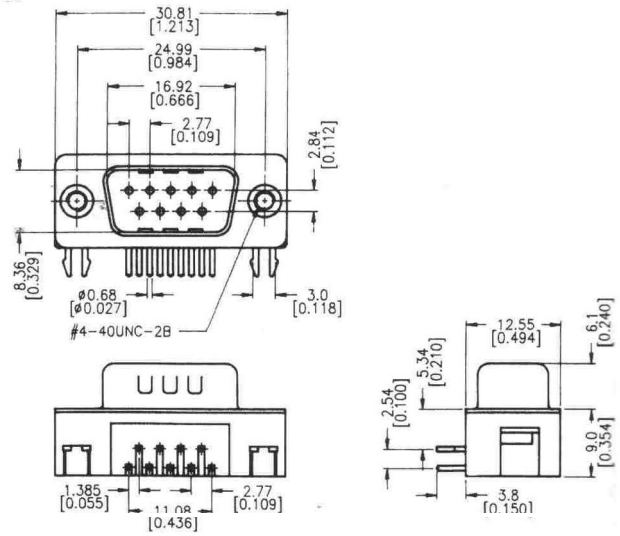

FEMALE


25S

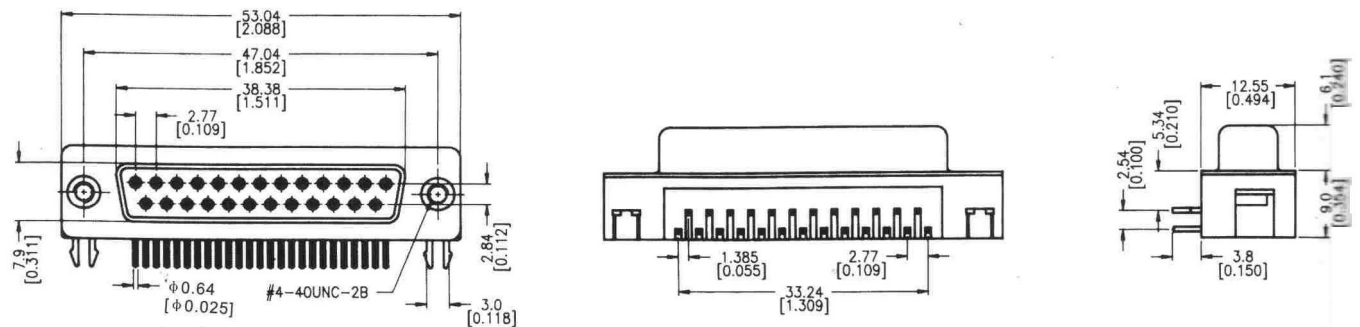

D-SUB RIGHT ANGLE PCB CONNECTOR

DMRHS Series

PROCESS OPTION

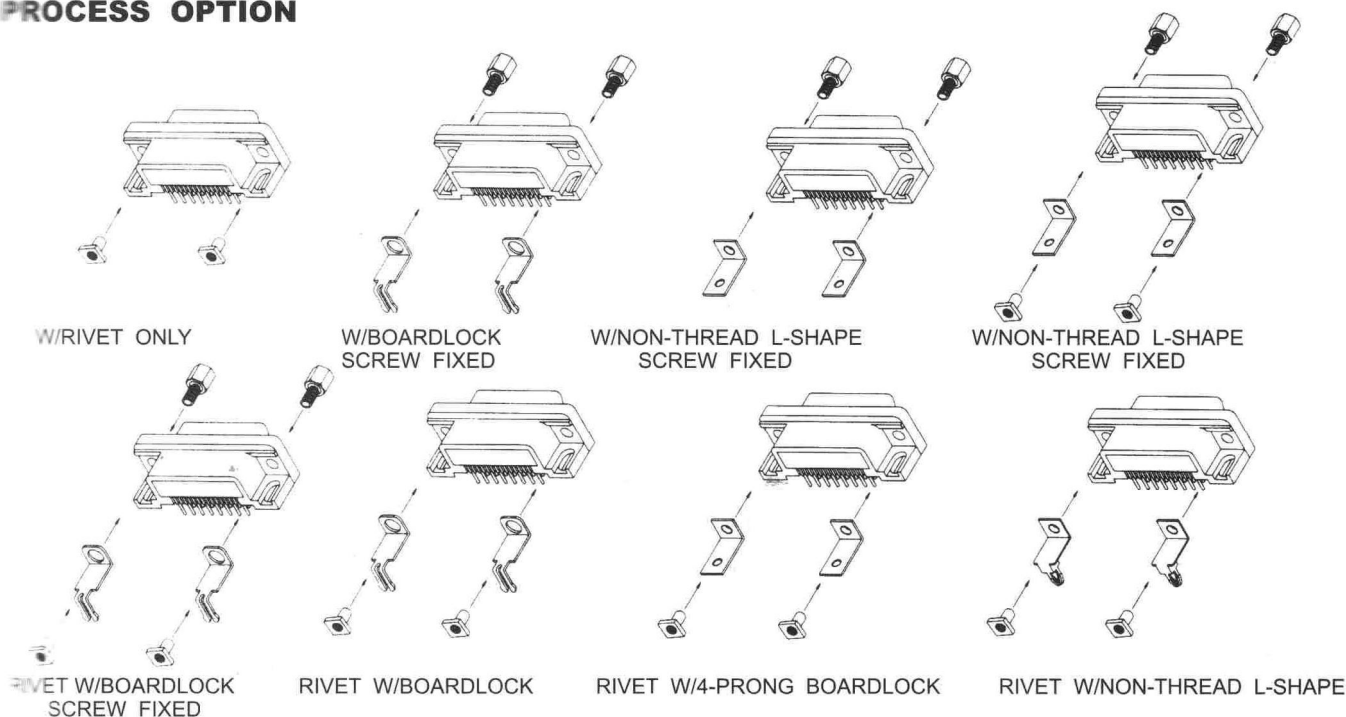

Order Information

DMRHS	A	15	S	G	T	A	A	C	3
1	2	3	4	5	6	7	8	9	10

1. SERIES NO.
DMRHS

2. TYPE
A=STANDARD

3. CONTACT NUMBER
09 15 23 25 37

4. CONTACT TYPE
P=MALE
S=FEMALE

5. CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD

6. SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

7. PROCESS OPTION
A=BOARDLOCK
B=RIVET W/BOARDLOCK
C=RIVET ONLY
F=4#40 THREAD L-SHAPE
G=RIVET W/4#40 THREAD L-SHAPE
I=RIVET W/NON THREAD L-SHAPE
J=RIVET W/M3 THREAD L-SHAPE
T=4-PRONG BOARDLOCK
U=RIVET W/4-PRONG BOARDLOCK

8. PARTS OPTION
A=NON RIVET
B=4#40 THREAD RIVET
C=M3 THREAD RIVET
D=M2.6 THREAD RIVET
E=NON THREAD RIVET

9. PARTS DIMENSION
A=NON ACCESSORIES
B=LOOSE HEX-SCREWS
(4.8*11.8mm)
C=FLXED HEX-SCREWS
(4.8*11.8mm)
D=LOOSE HEX-SCREWS
(5.8*12.0mm)
E=FIXED HEX-SCREWS
(5.8*12.0mm)

10. INSULATOR COLOR
3=BLACK