



D-SUB RIGHT ANGLE PCB CONNECTOR

DMRL Series


Dimension: $\frac{\text{mm}}{\text{Inch}}$

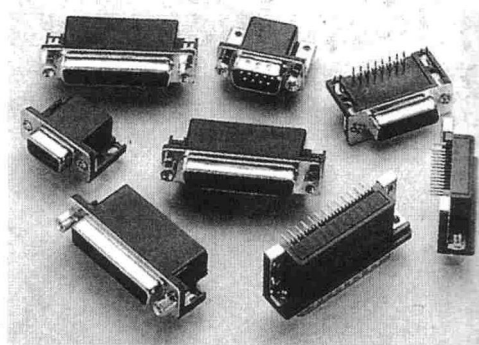


MALE

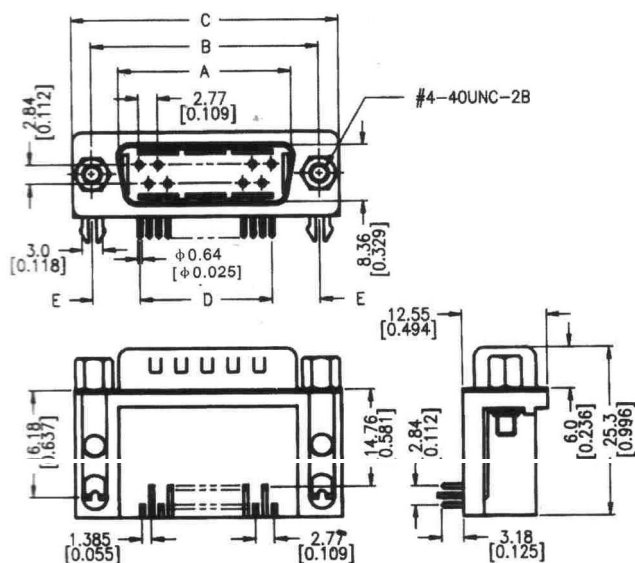


FEMALE

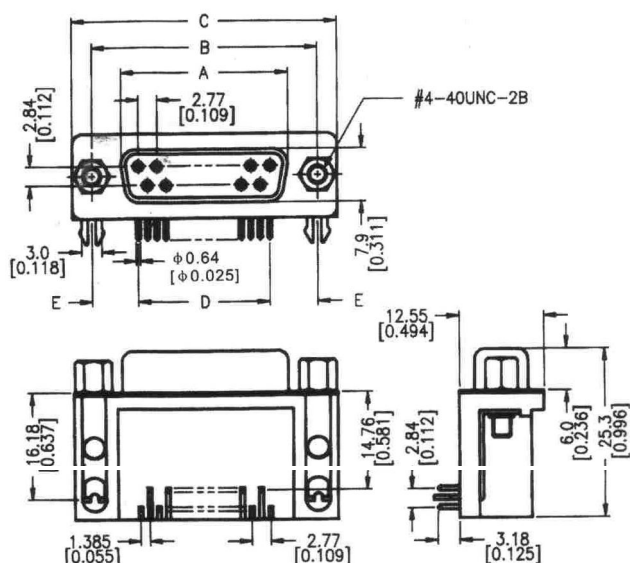

Standard Female Screwlock

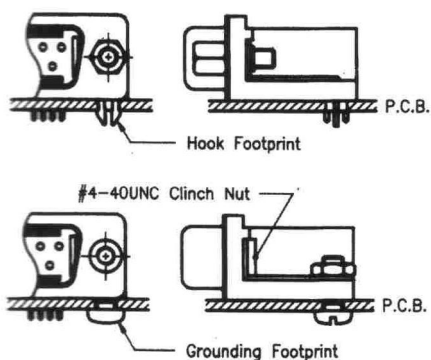


No. Of Contacts	Dim. A Male	Dim. A Female	Dim. B	Dim. C	Dim. D	Dim. E
9	16.92 [0.666]	16.33 [0.643]	24.99 [0.984]	30.81 [1.213]	11.08 [0.436]	6.955 [0.274]
15	25.25 [0.994]	24.66 [0.971]	33.32 [1.312]	39.14 [1.541]	19.39 [0.763]	6.965 [0.274]
25	38.96 [1.534]	38.38 [1.511]	47.04 [1.852]	53.04 [2.088]	33.24 [1.309]	6.90 [0.272]
37	55.42 [2.182]	54.84 [2.159]	63.50 [2.500]	69.32 [2.729]	49.86 [1.963]	6.82 [0.269]

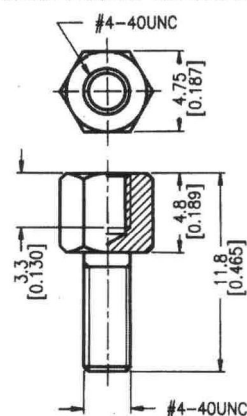

D-SUB RIGHT ANGLE PCB CONNECTOR

DMRL Series


P.C.B. LAYOUT PATTERN

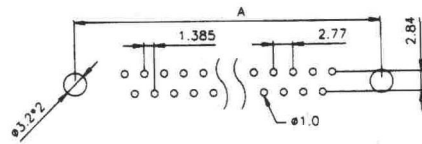

MALE/FEMALE P.C.B. LAYOUT

POSITION	A
9P	25.00
15P	33.30
25P	47.10
37P	63.50

PROCESS OPTION

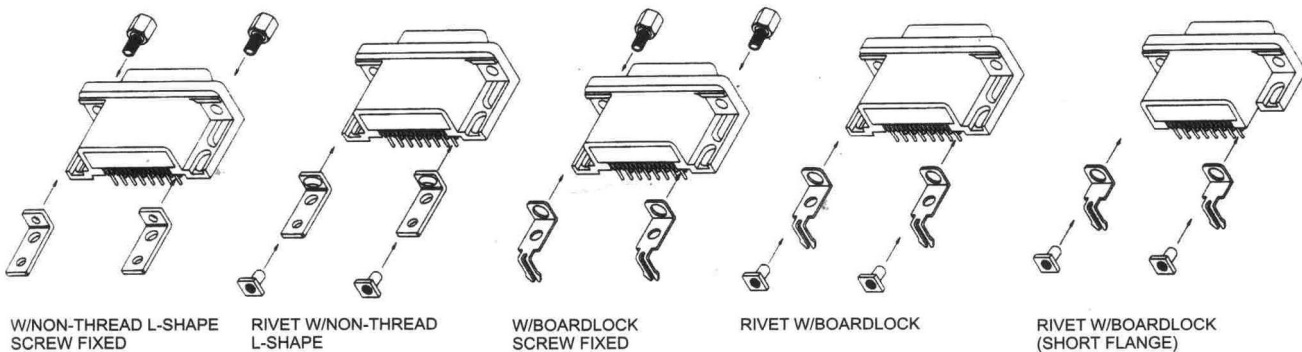

Order Information

DMRL	A	15	P	G	P	A	A	C	3
1	2	3	4	5	6	7	8	9	10

1.SERIES NO.

DMRL

2.TYPE

A=STANDARD

3.CONTACT NUMBER

09 15 25 37

4.CONTACT TYPE

P=MALE
(LONG FLANGE)
S=FEMALE
(LONG FLANGE)
C=MALE
(SHORT FLANGE)
D=FEMALE
(SHORT FLANGE)

5.CONTACT PLATING

S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ "GOLD
B=10 μ "GOLD
C=15 μ "GOLD
D=30 μ "GOLD

6.SHELL PLATING

T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

7.PROCESS OPTION

A=BOARDLOCK
B=RIVET W/BOARDLOCK
C=RIVET ONLY
F=4#40 THREAD L-SHAPE
G=RIVET W/4#40 THREAD L-SHAPE

8.THREAD OPTION

A=NON RIVET
B=4#40 THREAD RIVET
C=M3 THREAD RIVET
D=M2.6 THREAD RIVET
E=NON-THREAD RIVET

9.PARTS OPTION

A=NON ACCESSORIES
B=LOOSE HEX-SCREWS
(4.8*11.8mm)
C=FIXED HEX-SCREWS
(4.8*11.8mm)
D=LOOSE HEX-SCREWS
(4.8*11.8mm)
E=FIXED HEX-SCREWS
(5.8*12.0mm)

10.INSULATOR COLOR

3=BLACK