



D-SUB RIGHT ANGLE PCB CONNECTOR

DMRM Series



Dimension: $\frac{\text{mm}}{\text{Inch}}$

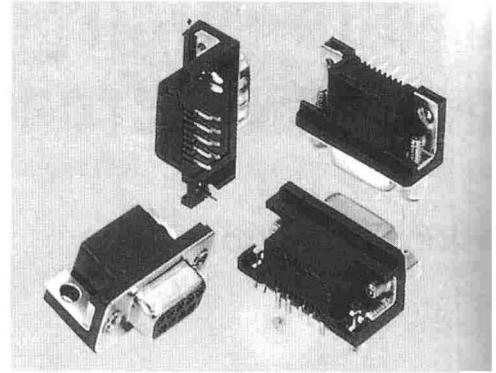

MALE

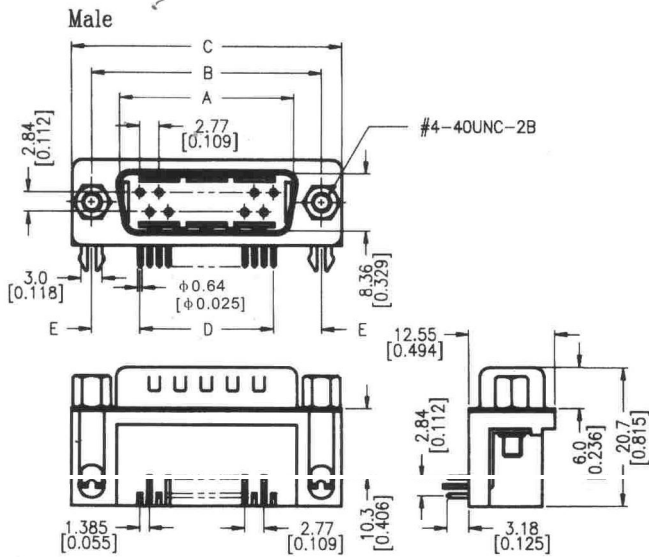


FEMALE

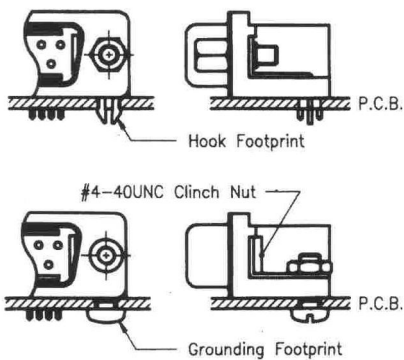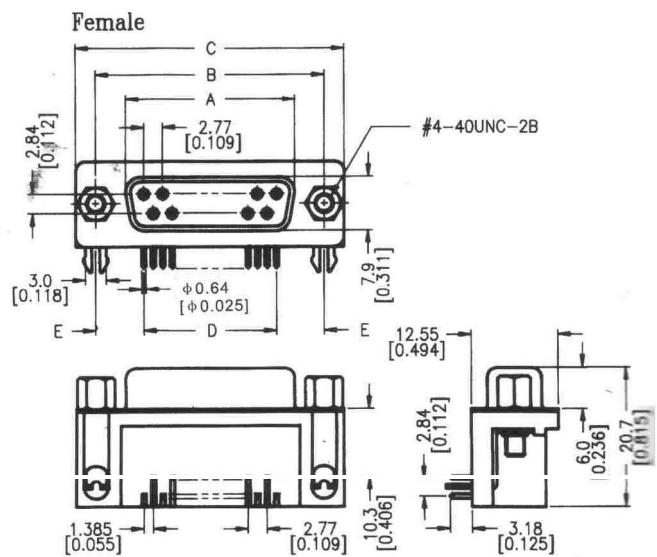

No. Of Contacts	Dim. A Male	Dim. A Female	Dim. B	Dim. C	Dim. D	Dim. E
9	16.92 [0.666]	16.33 [0.643]	24.99 [0.984]	30.81 [1.213]	11.08 [0.436]	6.955 [0.274]
15	25.25 [0.994]	24.66 [0.971]	33.32 [1.312]	39.14 [1.541]	19.39 [0.763]	6.965 [0.274]
25	38.96 [1.534]	38.38 [1.511]	47.04 [1.852]	53.04 [2.088]	33.24 [1.309]	6.90 [0.272]
37	55.42 [2.182]	54.84 [2.159]	63.50 [2.500]	69.32 [2.729]	49.86 [1.963]	6.82 [0.269]


Standard Female Screwlock

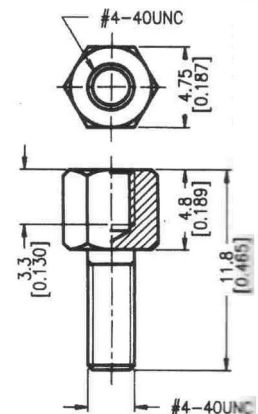

D-SUB RIGHT ANGLE PCB CONNECTOR

DMRM Series

PROCESS OPTION

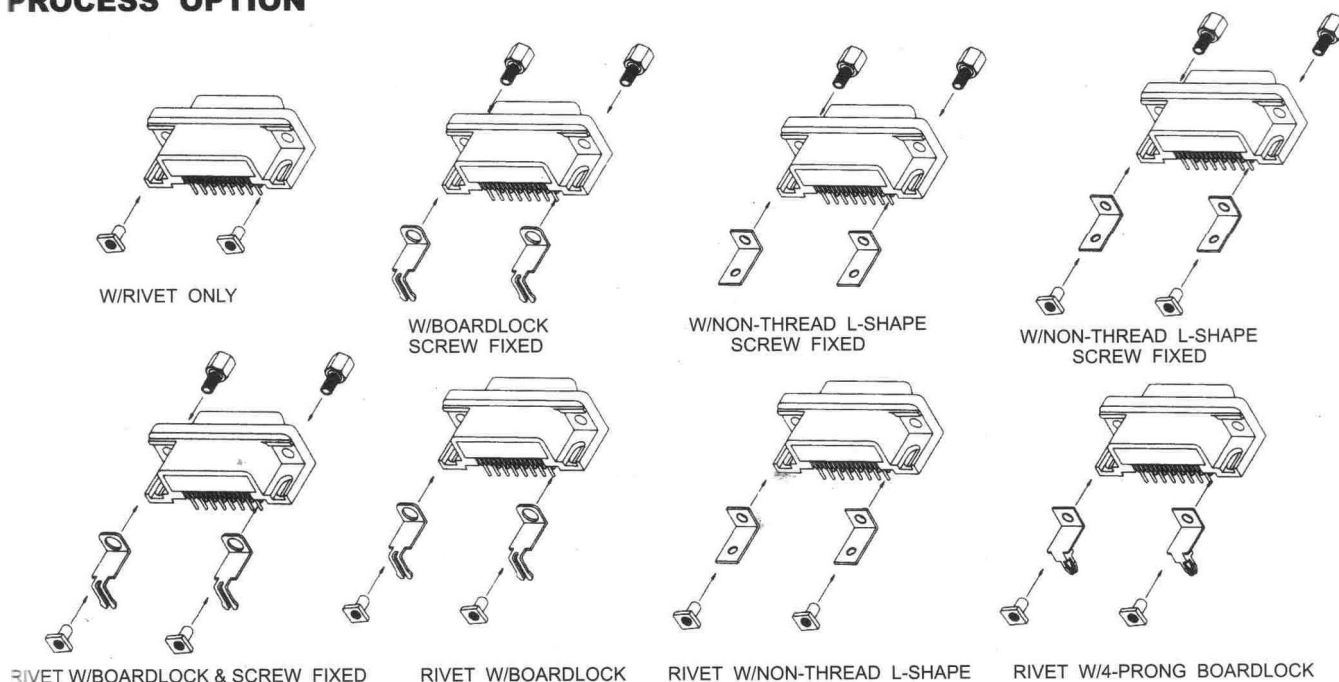

Order Information

DMRM	A	15	S	G	T	A	A	C	3
1	2	3	4	5	6	7	8	9	10

1.SERIES NO
DMRM

2.TYPE
A=STANDARD

3.CONTACT NUMBER
09 15 25 37

4.CONTACT TYPE
P=MALE
S=FEMALE

5.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD

6.SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

7.PROCESS OPTION
A=BOARDLOCK
B=RIVET W/BOARDLOCK
C=RIVET ONLY
D=NON-THREAD L-SHAPE
E=RIVET W/NON-THREAD L-SHAPE
F=4#40 THREAD L-SHAPE
G=RIVET W/4#40 THREAD L-SHAPE
T=4-PRONG BOARDLOCK
U=RIVET W/4-PRONG BOARDLOCK

8.PARTS OPTION
A=NON RIVET
B=4#40 THREAD RIVET
C=M3 THREAD RIVET
D=M2.6 THREAD RIVET
E=NON THREAD RIVET

9.PARTS DIMENSION
A=NON ACCESSORIES
B=LOOSE HEX-SCREWS
(4.8*11.8mm)
C=FLXED HEX-SCREWS
(4.8*11.8mm)
D=LOOSE HEX-SCREWS
(5.8*12.0mm)
E=FIXED HEX-SCREWS
(5.8*12.0mm)

10.INSULATOR COLOR
3=BLACK