


D - SUB PCB STRAIGHT CONNECTOR

DMS Series


Dimension: mm
Inch

No. Of Contacts	Dim. A Female	Dim. A Male	Dim. B	Dim. C	Dim. D	Dim. E
9	16.33 [0.643]	16.92 [0.666]	24.99 [0.984]	30.81 [1.213]	19.28 [0.759]	
15	24.66 [0.971]	25.25 [0.994]	33.32 [1.312]	39.14 [1.541]	27.51 [1.083]	3.18 [0.125]
19	30.00 [1.181]	30.75 [1.211]	38.94 [1.533]	44.94 [1.769]	32.86 [1.294]	
23	35.30 [1.390]	35.92 [1.414]	44.27 [1.743]	50.56 [1.991]	38.38 [1.511]	4.32 [0.170]
25	38.38 [1.511]	38.96 [1.534]	47.04 [1.852]	53.04 [2.088]	41.30 [1.626]	
37	54.84 [2.159]	55.42 [2.182]	63.50 [2.500]	69.32 [2.729]	57.71 [2.272]	6.35 [0.250]
50	52.43 [2.064]	52.81 [2.079]	61.11 [2.406]	66.93 [2.635]	55.32 [2.178]	

P.C. Board Layout - 9~37 Pos.




P.C. Board Layout - 50 Pos.

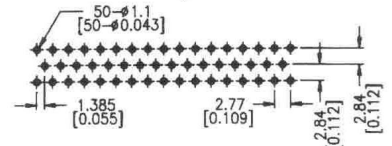


MALE

9,15,19,23,25 & 37 Positions

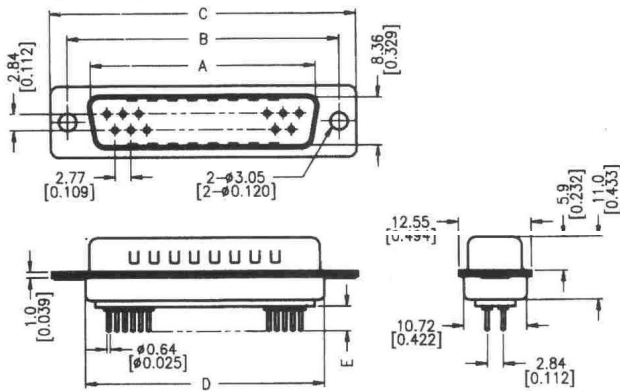


50 Positions

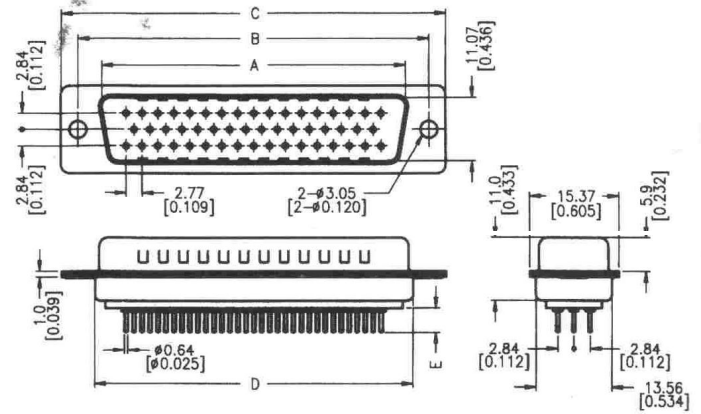


FEMALE

9,15,19,23,25 & 37 Positions

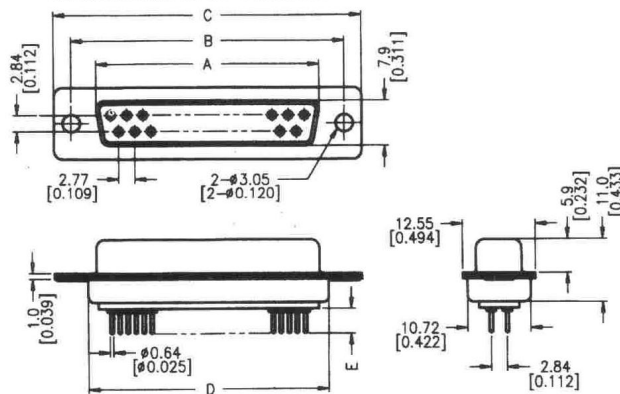


50 Positions

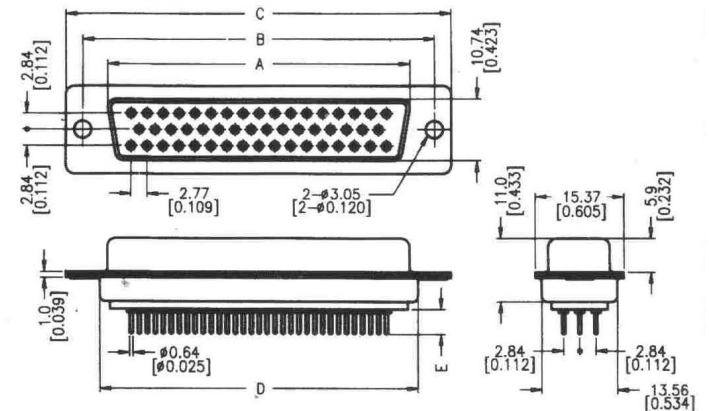


D - SUB PCB STRAIGHT CONNECTOR

DMS Series


PROCESS OPTION




FRONT RIVET



REAR RIVET



HEX SCREW + HEX NUT



BOARDLOCK-NUT RIVET

Order Information

DMS	A	15	P	G	P	A	A	A	1
1	2	3	4	5	6	7	8	9	10

1.SERIES NO .

DMS

2.TYPE

A=STANDARD

3.CONTACT NUMBER

09 15 19 23 25 37 50

4.CONTACT TYPE

P=MALE

S=FEMALE

5.CONTACT PLATING

A=5 μ " GOLD

B=10 μ " GOLD

C=15 μ " GOLD

D=30 μ " GOLD

6.SHELL PLATING

T=TIN

N=NICKEL

Z=ZINC

P=TIN+DIMPLE

Q=NICKEL+DIMPLE

7.PROCESS OPTION

A=THRU.HOLE

B=HEX-SCREW+1.5mm NUT

C=3.8mm OPEN HEX RIVET

D=5.8mm OPEN HEX RIVET

F=5.8mm CLOSE HEX RIVET

J=5.8mm BOARDLOCK RIVET

K=2.5mm OPEN HEX RIVET

8.PARTS OPTION

A=NON ACCESSORIES

B=FRONT RIVET

E=REAR RIVET

F=REAR RIVET+LOOSE SCREWS

G=REAR RIVET+FLXED SCREWS

9.CONTACT INSERTING OPTION]

A=FULLY LOADED

10.INSULATOR COLOR

1=WHITE

2=BLUE

3=BLACK

4=GREY