




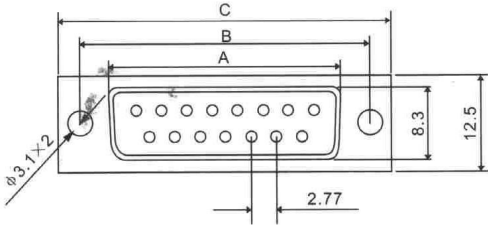
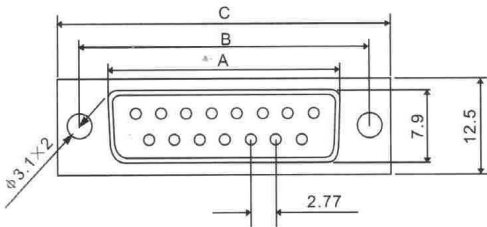


SUPER SLIM D-SUB PCB STRAIGHT CONNECTOR

DMSS Series

POSITION	A	B	C
9S	16.30	25.00	30.8
15S	24.60	33.30	39.2
25S	38.30	47.10	53.1
37S	54.80	63.50	69.4

POSITION	A	B	C
9P	16.92	25.00	30.8
15P	25.25	33.30	39.2
25P	38.96	47.10	53.1
37P	55.42	63.50	69.4

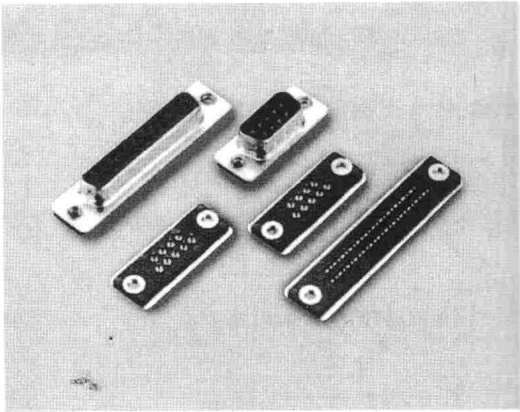

Order Information

DMSS	A	09	P	G	T	D	A	0	3
1	2	3	4	5	6	7	8	9	10

- 1.SERIES NO .
DMSS

2.TYPE
A=STANDARD

3.CONTACT NUMBER
09 15 25 37

4.CONTACT TYPE
P=MALE(MACHINED)
S=FEMALE(STAMPED)
- 5.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD

6.SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE
- 7.PROCESS OPTION
D=THREAD RIVET

8.PARTS OPTION
A=NON ACCESSORIES

9.CONTACT INSERTING OPTION
0=FULLY LOADED

10.INSULATOR COLOR
3=BLACK