


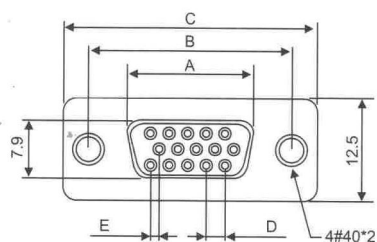


HIGH-DENSITY SUPER SLIM D-SUB PCB STRAIGHT CONNECTOR FOR NOTEBOOK

DMSSH Series

POSITION	Male. A	Female. A	B	C	D	E
15P/S	16.92	16.30	25.00	30.8	2.29	1.14
26P/S	25.25	24.60	33.30	39.2	2.29	1.14
44P/S	38.96	38.30	47.10	53.1	2.29	1.14
62P/S	55.42	54.80	63.50	69.4	2.41	1.20

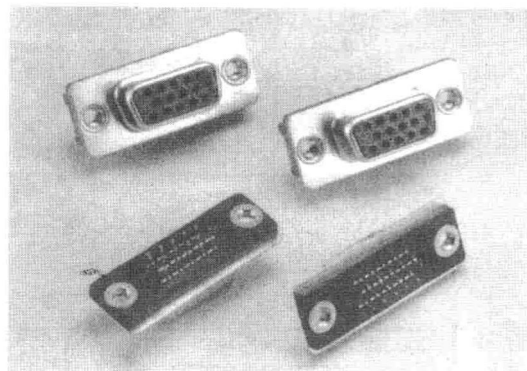

UNIT:mm

Order Information

DMSSH	A	15	S	S	T	D	A	A	3
1	2	3	4	5	6	7	8	9	10

1.SERIES NO.
DMSSH

2.TYPE
A=STANDARD

3.CONTACT NUMBER
15 26 44 62

4.CONTACT TYPE
S=FEMALE
P=MALE

5.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD

6.SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

7.PROCESS OPTION
D=THREAD RIVET

8.PARTS OPTION
A=NON ACCESSORIES

9.CONTACT INSERTING OPTION
A=FULLY LOADED

10.INSULATOR COLOR
3=BLACK