

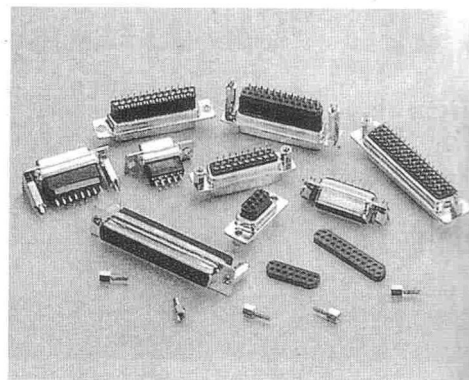



HIGH DENSITY D - SUB PCB STRAIGHT HIGH INSULATOR CONNECTOR


DSHH Series

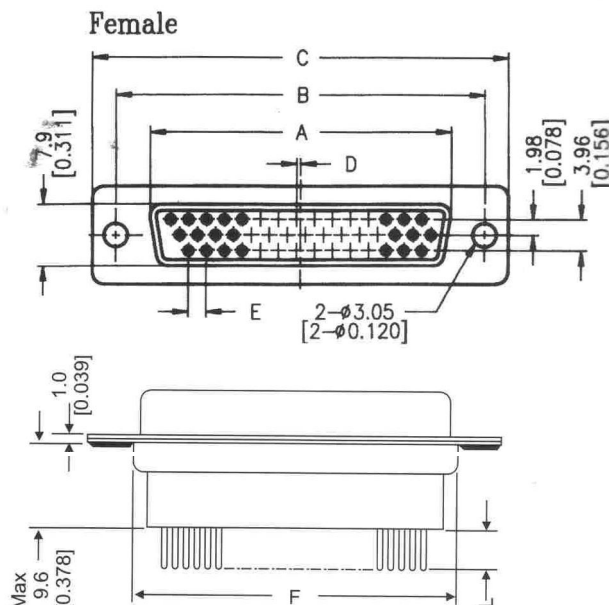

Dimension: $\frac{\text{mm}}{\text{Inch}}$

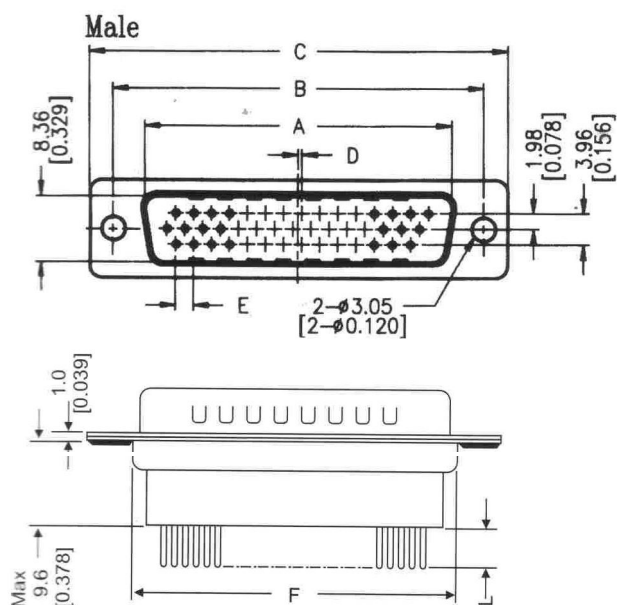


No. Of Contacts	Dim. A Male	Dim. A Female	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. L
15	16.92 [0.666]	16.33 [0.643]	24.99 [0.984]	30.81 [1.213]	0.25 [0.010]	2.29 [0.090]	19.28 [0.759]	3.6 [0.142]
26	25.25 [0.994]	24.66 [0.971]	33.32 [1.312]	39.14 [1.541]	0.51 [0.020]	2.29 [0.090]	27.51 [1.083]	5.4 [0.213]
44	38.96 [1.534]	38.38 [1.511]	47.04 [1.852]	53.04 [2.088]	0.51 [0.020]	2.29 [0.090]	41.30 [1.626]	7.2 [0.283]
62	55.42 [2.182]	54.84 [2.159]	63.50 [2.500]	69.32 [2.729]	0.58 [0.023]	2.41 [0.095]	57.71 [2.272]	




HIGH DENSITY D-SUB PCB STRAIGHT HIGH INSULATOR CONNECTOR

DSHH Series


P.C.B.LAYOUT PATTERN




15 POSTION FEMALE




26,44,62 POSTION FEMALE

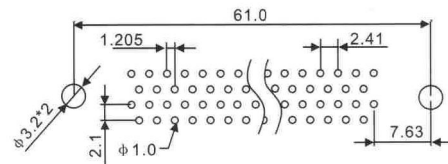

78 POSTION FEMALE/MALE




15PLSTION MALI




26,44,62 POSTION MALE

POSITION	A	B	C	D
15M/F	25.0	2.29	1.145	7.04
26M/F	33.3	2.29	1.145	6.88
44M/F	47.1	2.29	1.145	6.88
62M/F	63.5	2.41	1.205	7.00


PROCESS OPTION




FRONT ROVET



REAR ROVET



HEX SCREW+HEX NUT



BOARDLOCK-NUT RIVET

Order Information

DSHH	F	15	P	G	P	A	A	A	3
1	2	3	4	5	6	7	8	9	10

1.SERIES NO.
DSHH

2.TYPE
F=HIGH PROFILE HOSUING

3.CONTACT NUMBER
15 26 44 62 78

4.CONTACT TYPE
P=MALE
S=FEMALE
B=MALE
(LENGTH6.0mm)

5.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH

A=5 μ " GOLD
B=10 μ " GOLD
C=15 μ " GOLD
D=30 μ " GOLD
6.SHELL PLATING
T=TIN
N=NICKEL
Z=ZINC
P=TIN+DIMPLE
Q=NICKEL+DIMPLE

7.PROCESS OPTION
A=THRU.HOLE
B=HEX-SCREW+1.5mm NUT
C=3.8mm OPEN HEX RIVET
D=5.8mm OPEN HEX RIVET
F=5.8mm CLOSE HEX RIVET
J=10.0mm HEX BOARDLOCK RIVET
K=2.5mm OPEN HEX RIVET

8.PARTS OPTION
A=NON ACCESSORIES
B=FRONT RIVET
E=REAR RIVET
F=REAR RIVET+LOOSE SCREWS
G=REAR RIVET+FIXED SCREWS

9.CONTACT INSERTING OPTION]
A=FULLY LOADED

10.INSULATOR COLOR
3=BLACK