
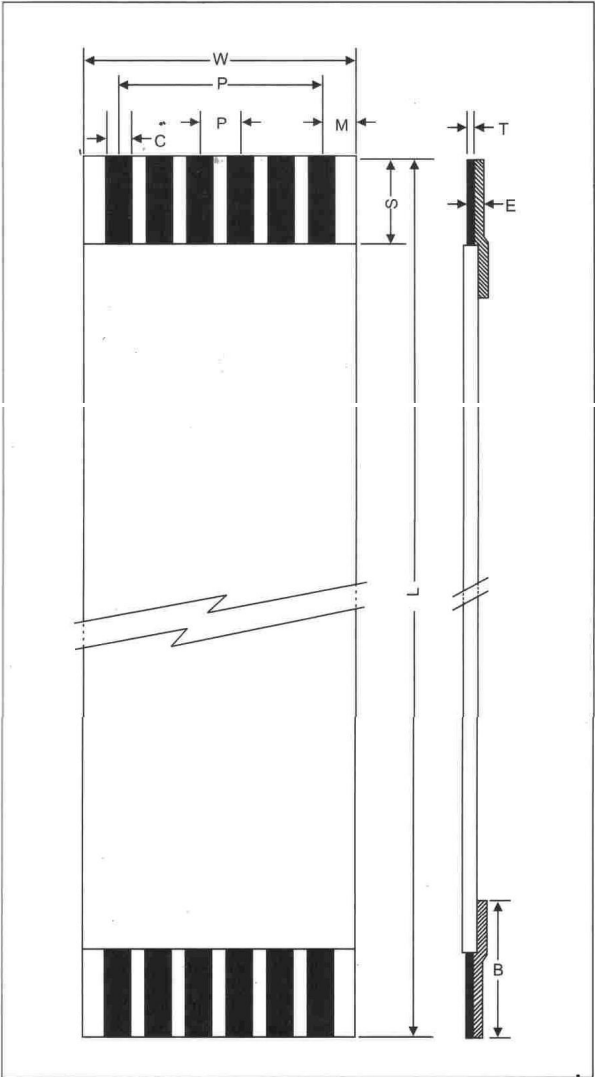


FLEXIBLE FLAT CABLE

FFC Series

FILIM CONDUCTOR SUPPORTING TAPE

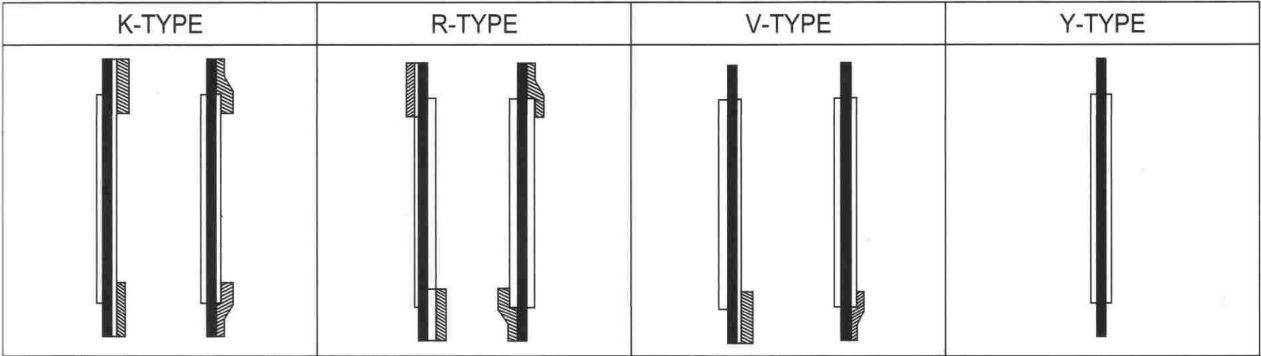

FFC SPECIFICATION					
ITEM	UNIT	STANDARD			
PITCH(P)	mm	1.0	1.25	2.0	2.54
NO. OF ELECTRIC LINE	CORE	7-70	4-70	4-35	4.33
THICKNESS(T)	mm	0.05, 0.1	0.05, 0.1	0.05, 0.1	0.1
WIDTH(C)	mm	0.65, 0.8	0.65, 0.8	0.65, 0.8	1.27
TOTAL PITCH(P)	mm	1.0* (N-1)	1.25* (N-1)	2.0* (N-1)	2.54* (N-1)
CABLE WIDTH(W)	mm	1.0* (N+1)	1.25* (N+1)	2.0* (N+1)	2.54* (N+1)
MARGIN(M)	mm	1.0	1.25	2.0	2.54
STRIP LENGTH(S)	mm	3,4,5,6			
END THICKNESS(E)	mm	0.3			
SUPPORTING TAPEOENGTH(B)	mm	6,7,8,9,11,15			
TOTAL LENGTH(L)	mm	28~6000			
CONDUCTOR MATERIAL	—	TIN COATED FLAT COPPER WIRE			
INSULATOR MATERIAL	—	FLAME RETARDANT ADHESIVE ON POLYESTER FILM			

Order Information FFC-K-7* 61-0.8* 0.05-2.54-3/3

